


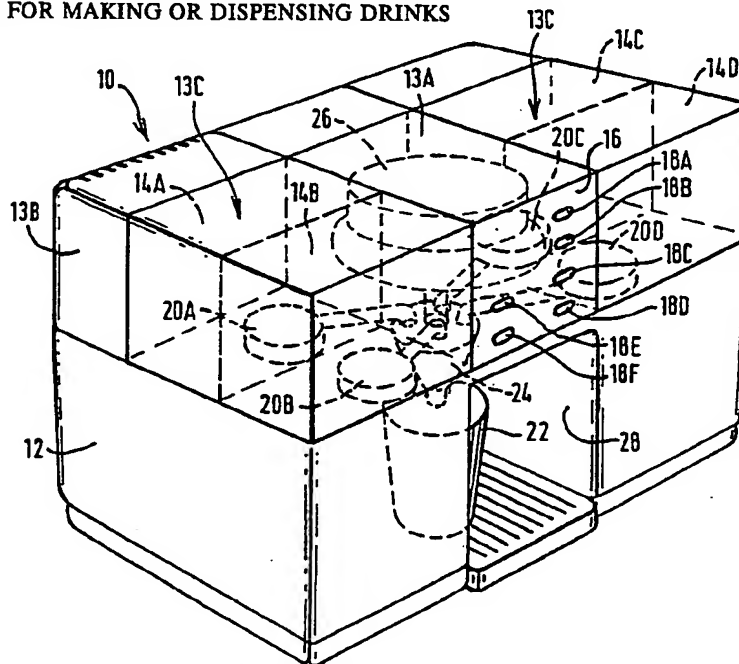

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>B67D 1/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 91/00238</b>  <b>(43) International Publication Date:</b> 10 January 1991 (10.01.91)
<b>(21) International Application Number:</b> PCT/GB90/00946 <b>(22) International Filing Date:</b> 19 June 1990 (19.06.90)  <b>(30) Priority data:</b> 8914420.8                      23 June 1989 (23.06.89)                      GB 9009947.4                      2 May 1990 (02.05.90)                      GB  <b>(71) Applicant (for all designated States except US):</b> ISOWORTH LIMITED [GB/GB]; 10 Manasty Road, Orton Southgate PE2 0UP (GB).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only) :</b> SCOTT, Alistair [GB/GB]; 32 Mill Lane, Impington, Cambridge CB4 4XN (GB). PEARSON, Allen, John [GB/GB]; 17 Docksgate, Somersham, Cambridge PE17 3NZ (GB). COLLINS, James, Terence [GB/GB]; 22 Primrose Drive, Yaxley, Peterborough (GB).		<b>(74) Agents:</b> BERESFORD, Keith, Denis, Lewis et al.; Beresford & Co, 2/5 Warwick Court, High Holborn, London WC1R 5DJ (GB).  <b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB, GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent), US.  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** APPARATUS FOR MAKING OR DISPENSING DRINKS**(57) Abstract**

Apparatus for producing carbonation flavoured drinks has a number of features. Water introduced to a water break from the mains supply holds a valve open whilst the carbonation chamber is being filled. A concentrate supply includes a metering chamber into which concentrate flows under gravity and from which concentrate is discharged by gas pressure. The concentrate containers include means to indicate the type of concentrate therein and the degree of carbonation of water is controlled by detecting this indication. Change-over from one gas supply bottle to another is achieved utilising the pressure of the gas in the bottle to displace an element which effects the change-over. Concentrate in supply containers thereof is cooled by coolant used from cooling the carbonation chamber.

### DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
DE	Germany, Federal Republic of	LU	Luxembourg	TG	Togo
DK	Denmark			US	United States of America

- 1 -

APPARATUS FOR MAKING OR DISPENSING DRINKS

This invention relates to apparatus for making or dispensing carbonated drinks.

5

Apparatus for dispensing carbonated drinks disclosed in our earlier GB Patent 2,161,089 is primarily intended for domestic use. The water container is filled periodically according to demand. The number of carbonated drinks which it is intended to dispense in the course of an evening is relatively small compared with the demand that might be expected from such apparatus installed in a social club or public bar.

10  
15

Accordingly, applicants have designed a new carbonation apparatus which is particularly but not exclusively useful in such an environment. This has led to considerable development of various facets of the apparatus which are disclosed herein.

20

In the earlier apparatus concentrate (which is used to flavour drinks) was dispensed by pressurising the concentrate (liquid) in the concentrate bottles so that the concentrate flowed through a dip stick to a dispenser, that dispenser was provided with a valve

25

- 2 -

arrangement. The valve arrangement was actuated mechanically when the user pushed a glass into a dispensing compartment. The means by which the valve arrangement was actuated included a mechanical selector (by which the desired flavour of concentrate was selected). That selector was required to be aligned by the user with the valve arrangement for the required concentrate before the glass (cup) was so positioned in the dispensing compartment that it would mechanically actuate the valve arrangement to dispense concentrate (flavouring).

Such apparatus is perfectly satisfactory for its intended use and environment. Applicants now provide, in one aspect of the invention, apparatus wherein for volume usage drinks can be more rapidly dispensed (in terms of the frequency of use).

A further object is to provide in an embodiment means for the selection of the concentrate to obtain the flavour desired by the user without mechanically resetting a selector.

The invention, however, has a number of features and aspects as will be described.



- 3 -

### Dispensing Drinks

According to one aspect of the present invention there is provided carbonation apparatus for dispensing carbonated drinks having a carbonation chamber and a gas supply, dispensing means for dispensing a given quantity of concentrate for flavouring carbonated water to provide a drink is actuated by carbonation gas. In this embodiment there is means for employing the carbonation gas from the head space of the carbonation chamber to actuate the dispensing means to dispense concentrate. The dispensing means may be charged with concentrate by free flow from a concentrate container in a first step prior to dispensing in a second step.

In one embodiment, the dispensing means delivers a measured quantity of concentrate and this is affected by a charge of carbonation gas and not by a mechanically actuated valve. In an embodiment provision is made whereby the quantity of concentrate dispensed may be different for different concentrates. The dispensing means may be adapted to deliver a quantity which is related to the flavour of the concentrate. This enables (as further explained later) the ratio of concentrate to carbonated water to

- 4 -

be varied as appropriate to the flavour being selected.

5 According to another aspect of the invention there is provided a dispensing mechanism for concentrate for carbonated drinks comprising a concentrate chamber for receiving concentrate through an opening thereto from a concentrate container. An inlet valve mechanism for a charge of carbonation gas. The carbonation gas  
10 actuating the dispensing mechanism to dispense said quantity of concentrate. An outlet mechanism to permit said quantity of concentrate to be dispensed in response to pressure exerted by the carbonation gas.

15 In a preferred embodiment the dispensing mechanism includes diaphragm means in the concentrate chamber, the carbonation gas acting on the diaphragm means to expel said quantity of concentrate.

20 According to another aspect of the invention there is provided carbonation apparatus having a dispensing means actuated by the carbonation gas wherein the flow of carbonation gas to said concentrate dispensing means is controlled by a concentrate selection  
25 mechanism for selecting the concentrate of that dispensing mechanism. In an embodiment, the selection

- 5 -

mechanism is operable to allow carbonation gas from said dispensing means to be exhausted to atmosphere thereby to permit recharging of the dispensing mechanism with concentrate.

5

The selection mechanism may be operable to cause the carbonation chamber to commence dispensing carbonated water and the or a selected dispensing means to commence dispensing concentrate in timed relationship.

10

#### Low Cost Syrup Metering Unit

An object of one aspect of the invention is to provide a low cost syrup metering unit, preferably a unit of such low cost that it may be disposed of after use.

15

In one aspect, the invention provides a device for discharging liquid comprising a housing defining a metering chamber for receiving the liquid, at least a portion of the housing being distortable by pressure to open an outlet for discharge of the fluid in the metering chamber.

20

- 6 -

Another aspect of the invention provides a device for discharging metered quantities of fluid comprising a housing defining a metering chamber having opposed wall means which are movable apart under pressure to open an outlet for discharging fluid from the chamber.

In a further aspect, the invention provides a concentrate container for containing flavoured concentrate for a carbonated drink, a metering device mounted on said container and adapted for discharging concentrate therefrom in metered quantities, first valve means between the metering chamber and the concentrate container for permitting concentrate to flow from the container into the metering chamber under gravity when the container is orientated with the metering chamber below the container, and a second valve means arranged to open when the first valve means is open to permit air to enter the container and rise through the concentrate therein as concentrate leaves the container and enters the metering chamber.

In a further aspect, the invention provides a container for containing concentrate or other liquid to be dispensed and comprising first and second valves

- 7 -

disposed in the region of a portion of the container which is to be lowermost when dispensing liquid, the first valve being arranged to open to permit liquid to leave the container under gravity and the second valve being positioned higher than said first valve (when said portion is lowermost) so as to open in response to pressure reduction in the container as liquid leaves the container, to permit entry of air into the container.

10

In yet a further aspect, the invention provides a valve comprising a valve seat defining a passage through which fluid may flow, a valve head engageable with said seat to close the passage and movable away from the seat to open the passage, a ligament connected to the valve head and extending through the passage, and a transversely extending stop element attached to the ligament at the opposite side of the passage to the valve head for engaging an abutment surface to limit the distance through which the valve head may move away from the valve seat. Preferably, the valve head ligament and stop member are integrally moulded from synthetic plastics material.

15

20

- 8 -

The above aspects of the invention have the advantage that the dispensing unit, concentrate supply and valve arrangements may be particularly inexpensive so as to be disposable after use. Preferably, this low cost dispensing unit is attached to a syrup container, such as a box or bag-in-the-box containing syrup so that the purchaser of replacement syrup containers would obtain, with each one, a new dispensing unit and both the syrup container and dispensing unit would be disposed of after use.

#### Syrup Flow Control

A further aspect of the invention provides a concentrate dispensing device for dispensing concentrate in response to application of gas pressure thereto, the device comprising outlet means which provides a relatively large outlet when the applied gas pressure is relatively small and a relatively smaller outlet when the gas pressure is relatively large. In this way, differences between the rate of discharge of concentrate arising from application of different gas pressures may be reduced or eliminated.

- 9 -

### Charging the Carbonation Chamber

For carbonation apparatus to be used in an environment where the frequency of demand for drinks is high, it is desirable that the supply of water to the carbonation chamber is continuous.

Accordingly, another aspect of the present invention provides carbonation apparatus for dispensing carbonated drinks having a carbonation chamber, water supply means for filling the carbonation chamber with water, a passage of said water from said water supply means to said carbonation chamber requiring the water to pass through a space into which the water supply is discharged and from which space the water may then flow to said carbonation chamber whereby reverse flow of carbonated water back into the water supply means is prevented.

In an embodiment the space is defined by a water break chamber and a passage from the water break chamber to the carbonation chamber is controlled by a valve which comprises a ball and cage arrangement operable to close the passage when the water level has reached a predetermined level. The ball and cage arrangement is particularly advantageous as the supply of water can

- 10 -

be arranged to depress the ball and allow the flow of water when required but when the supply is cut off the ball seals the passage. Such an arrangement is particularly simple, reliable, and economic to implement.

#### Changeover of Carbonation Gas

In carbonation apparatus for high volume usage it is desirable to be able to change rapidly from one gas supply to another during operation of the carbonation apparatus without down time.

According to another aspect of the invention there is provided a changeover mechanism for changing gas supplies for use with a gas supply arrangement having a first and second coupling means each with a first and second gas flow control means associated therewith and adapted for connection to a first gas supply, first and second actuating members operable to permit gas flow through said first and second gas flow control means respectively, wherein said changeover mechanism is adapted to operate in one of two conditions whereby in each of said conditions one of said first and second gas actuating members is repeatedly actuated, and changeover means switching



- 11 -

actuation from one to the other of said conditions following detection that the gas supply associated with the actuating member last actuated has reached low pressure.

5

This changeover mechanism (an embodiment of which is illustrated) facilitates continuous operation of the carbonation apparatus: an empty gas bottle can be replaced when the carbonation apparatus is not in use.

10

#### Variable Carbonation

As will be further explained in relation to an embodiment, it is possible to arrange that the period during which the water is carbonated in the carbonation chamber is varied according to the nature of the concentrate. For this purpose according to a further aspect of the invention, there is provided carbonation apparatus with a carbonation chamber and agitating means for carbonating, control means for determining the carbonation period during which the agitating means is operational, concentrate being mixed with the carbonated water in the dispensed drink, means for determining the carbonation period in

15

20

25

- 12 -

dependence upon an identification of the concentrate to be dispensed.

5 Further aspects of the variable carbonation and its mode of implementation are described in a specific embodiment. That specific embodiment also makes provision for the concentrate containers to carry identification so that a suitably adapted apparatus can have an indicator next to a selection button  
10 indicating that the desired flavour is available.

#### Cooling the Concentrate

15 The cooling of the concentrate is facilitated in an embodiment in an especially advantageous way. According to a further aspect of the invention there is provided carbonation apparatus for dispensing flavoured drinks comprising a carbonation chamber surrounded by a cooling jacket for the passage  
20 therethrough of a cooling medium, a compartment for a container of concentrate juxtaposed said cooling jacket, wherein both cooling of the carbonation chamber and cooling of the concentrate container is achieved by thermal transfer to said cooling medium.

25

The apparatus defined in the above statement is

- 13 -

especially advantageous for the cooling of the concentrate since the cooling arrangement takes advantage of an efficient housing design and an efficient layout of that design whereby the medium for cooling the carbonated water is also used for cooling the concentrate. This enhances both the production of the apparatus and the reliability thereof.

Further aspects of the present inventions will be described with reference to the accompanying drawings. Furthermore, further aspects will be apparent from the appended claims.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 shows a front perspective view of a water carbonation apparatus;

Figure 2 shows a schematic diagram of the carbonation apparatus of Figure 1;

Figures 3A, 3B and 3C show sectional views of a concentrate selection mechanism prior to selection,

- 14 -

during selection actuation, and subsequent to selection actuation;

5       Figures 4A and 4B show sectional views of a concentrate dispensing mechanism before and after filling the mechanism with concentrate;

10       Figures 5A, 5B and 5C show sectional views of an alternative embodiment of a concentrate dispensing mechanism, with the mechanism full, empty, and filling with concentrate;

15       Figures 6A, 6B show sectional views of an auto exhaust valve mechanism with the valve member in two operating positions;

Figure 7 shows a sectional view of a relief valve mechanism;

20       Figure 8 shows a schematic view of carbonation apparatus, similar to Figure 2, but including graphic representation of refrigeration means and a carbonation chamber (the chamber being empty);

- 15 -

Figures 9A, 9B show further sectional views of the carbonation chamber of Figure 8 with the chamber water level at two stages namely filling and full, respectively;

5

Figure 10 shows a sectional view of a water pressure regulation mechanism of the apparatus of Figure 8;

10

Figure 11 shows a rear perspective view of the carbonation apparatus with a changeover mechanism for changing the carbonation gas applied between two gas cylinders;

15

Figure 12 shows a perspective view of the changeover mechanism of Figure 11 when a cover plate is removed;

20

Figures 13a to h, 13i to 13p, and 13q to 13x respectively show three phases of operation of the changeover mechanism, namely continuous operation using one gas cylinder, operation changing from one gas cylinder to the other gas cylinder, and continuous operation using the other gas cylinder;

- 16 -

Figure 14A shows a perspective view of the part of the changeover mechanism by means of which the actuator pins are reciprocated;

5      Figure 14B shows a side view of parts of the mechanism of Figures 14A;

Figure 14C shows a perspective view of those parts of the mechanism shown in Figure 14B;

10

Figure 15 shows another perspective view of the upper part of the carbonation apparatus with the concentrate vessels displaced to render visible a sensor means for detecting carbonation requirements of different concentrates;

15

Figure 16 shows a part of the carbonation apparatus of Figure 1 which illustrates a compartment for concentrate containers;

20

Figure 17 shows a block diagram of the circuitry included in the carbonation apparatus of Figure 1;

25

Figs. 18 to 21 are diagrammatic cross-sectional views of a dispensing device according to a further embodiment

- 17 -

of the invention, showing the device in four different conditions;

5 Fig. 22 is a cross-section on the line V-V shown in Fig. 18;

Fig. 23 is a perspective view, partly cut-away, of a part of the device of Figs. 18 to 22;

10 Fig. 24 is an enlarged section through part of the device shown in Figs. 18 to 22;

15 Fig. 25 is an enlarged perspective view of part of the device as shown in Fig. 24;

Figs. 26 and 27 are views similar to Figs. 19 and 20 but showing an alternative embodiment of the invention; and

20 Fig. 28 is an enlarged sectional view through part of the device shown in Figs. 26 and 27;

#### 25 GENERAL DESCRIPTION OF APPARATUS (FIGURE 1)

A water carbonation apparatus 10 for preparing drinks

- 18 -

which combine carbonated water with an essence or flavouring is shown in Figure 1. The apparatus comprises a housing 12, the lower section of which is generally rectangular and which has an upper section comprising a central upper portion 13a extending forwardly from a rear upper portion 13b which extends along the rear wall of the housing. The upper portions 13a and 13b define two compartments laterally spaced either side of the upper portion 13a. These compartments have compartment covers 13c and accommodate containers 14a to 14d (the presence of which is illustrated schematically) for concentrate to be mixed with carbonated water to provide the drinks which are dispensed. The compartment covers 13c are formed of a material (or lined with a material) having selected thermally insulating properties in order to insulate the containers 14 and the concentrate therein from the ambient conditions. The containers 14a to 14d may be of the bag-in-box construction (see Figures 4A, 5A) in which the outer container is formed of a rigid membrane such as cardboard and the inner container is formed from a foil of a material which will be collapsible as the concentrate is dispensed from the container through an outlet connecting member (not shown). The containers 14 are arranged in pairs 14a, 14b and 14c, 14d as shown.



- 19 -

The upper portion 13a of the housing provides at the front panel thereof a selection panel 16 which accommodates selection buttons 18a to 18f for the selection of a drink flavoured with a particular concentrate by buttons 18a to 18d and to permit selection of still water or carbonated water (without flavouring) by buttons 18e, 18f respectively. Each of the containers 14a to 14d are coupled to a concentrate dispensing mechanism 20a to 20d respectively (shown in broken lines). When the user requires a drink he places a glass or cup 22 below a mixing chamber 24 in the form of a nozzle which communicates with a carbonation chamber 26 (shown in broken line) and the concentrate dispensing mechanisms 20a to 20d. The glass 22 has to be placed in a dispensing compartment 28 which opens to the front of the housing 12. There is a sensing mechanism to detect whether a glass 22 is present in compartment 28 before the dispensing of drinks.

#### Description of Figure 2

Figure 2 shows a schematic diagram of the apparatus 10. A water supply 30 communicates by a water supply line 32 with the carbonation chamber 26. Likewise a gas supply tank or main reservoir 34 containing the

- 20 -

carbonation gas such as carbon dioxide, communicates via a gas supply line 36 with the carbonation chamber 26. Both of these lines 32,36 are controlled by valves (e.g. solenoid actuated valves) not shown.

5 Carbonation of the water takes place in chamber 26. The apparatus may be arranged to operate such that the chamber 26 is refilled with water immediately following the dispensing of the previous drink so that the chamber normally stands full of water. After the

10 carbonation step, the carbonation gas which remains in the chamber may pass through exhaust lines 38,39. Exhaust line 38 is controlled by a solenoid valve S1 which operates to permit the gas to pass to an auto exhaust valve V1, which in turn may pass the

15 carbonation gas via exhaust line 39 with a check valve V2 to charge reservoirs 40a to 40d. Typically the pressure of the carbonation gas in the gas supply 34 will be in the order of 6 to 7 bar (about 100 psig) whereas the required pressure in the reservoirs 40a to

20 40d will be in the order of 2 to 3 bar (about 40 psig). The collective capacity of the four reservoirs 40a to 40d is about four times that of the head space in the carbonation chamber when it is full of carbonated water. After charging the pressure in the

25 reservoirs 40 will be slightly above the level just indicated due to the carbonation of the water itself

- 21 -

since the carbonation gas in the water tends to maintain the pressure in the head space. The reservoirs 40a to 40d are themselves connected by a charge line 42 to a pressure relief valve V3 from which the charge line 43 continues via the selection buttons 18a to 18d (those buttons on panel 16 for the selecting of flavours corresponding to the concentrate in the containers 14a to 14d of Figure 1). Further charge lines 44 run from each of the selection buttons 18 to a respective one of the concentrate dispensing mechanisms 20a to 20d. As shown, the concentrate dispensing mechanism 20a communicates with respective concentrate container 14a. A glass 22 is shown disposed below an outlet from the concentrate dispensing mechanism 20a and a valve V4 of the carbonation chamber 26.

The valve V4 is associated with an arm 46 which is pivotally connected to an actuating solenoid S2 and an actuating member 48 for the pressure relief valve V3.

#### OPERATION OF APPARATUS OF FIGURE 2

Each selection button 18a to 18d selects a respective

- 22 -

one of the concentrate containers 14a to 14d for a particular flavour of the drink dispensed. The selection buttons 18a to 18d are each associated with a respective selection mechanism 50 (further described with reference to Figures 3A to 3C). Chamber 26 is already charged with water. The respective concentrate dispensing mechanism 20a is charged with concentrate. Assuming that a glass 22 is in place (i.e. in the compartment 28 of Figure 1) actuation of the button 18a is possible. This actuation initiates a cycle of the carbonation apparatus (to be further described). During the cycle, dispensing of concentrate and carbonated water occurs as follows. For the purpose of dispensing concentrate, carbonation gas is caused to flow from the reservoirs 40 through the charge line 42, the pressure relief valve V3 (when actuated by the solenoid S2), the charge line 43, the concentrate selection mechanism 50 (Figure 3) associated with the button 18a through the further charge line 44 to the concentrate dispensing mechanism 20a to dispense a measured quantity of the concentrate from the dispensing mechanism 20c which is charged by the concentrate container 14a. Likewise during said cycle, the solenoid S2 is actuated to open the valve V4 to dispense carbonated water from the carbonation chamber 26. The two liquids, the carbonated water and

- 23 -

the concentrate, dispensed respectively from the valve V4 of chamber 26 and an outlet mechanism 82 of the concentrate dispensing mechanism 20 are mixed as they pass to the glass 22 (see the mixing chamber 24 of Figure 1). Further details of the apparatus shown in Figure 2 will become apparent from the description below of Figures 3 to 7.

#### Concentrate Selection Mechanisms 50

One of the concentrate selection mechanisms 50 associated with the selection buttons 18a to 18d is shown in Figures 3A to 3C which illustrate various stages of its operation. The concentrate selection mechanism 50 comprises the selection button 18a (see Figures 1 and 2) which is carried by a shaft 52 having a collar 52a. Collar 52a is displaceable between a position in which it contacts front panel member 16 (see Figure 1) and a position in which it contacts a panel member 56 having an aperture 56a for the shaft 52. A locking plate 54 locks the button 18a with collar 52a adjacent panel 16 when no glass/cup is present in dispensing compartment 28 (Figure 1). It is displaced (for example by a solenoid) when the glass 22 is detected thereby enabling actuation of

- 24 -

button 18a. Detection may be by way of a sensing mechanism detecting a reflected light beam.

5 The panel member 56 forms a front plate of a valve chamber 60 which is further defined by a first valve chamber housing 58.

10 Within the valve chamber 60 there is a movable cylinder 62 having a main portion 62a of a diameter such as to be a close fit in the cylindrical chamber 60 and sealed by means of an O-ring seal 62d. The cylinder 62 further comprises a cam portion 62b and a reduced portion 62c. The cam portion 62b is formed as a conical reduction between the outer main portion 62a and the inner reduced portion 62c. The cylinder 62 has a bore 62e for the passage of a piston member 64. The piston member 64 is an extension of the shaft 52 and is of reduced diameter relative thereto. It extends through the bore 62e of the cylinder 62.

15 20 Piston member 64 is provided at its leading end with a piston head 64a. Head 64a carries at its rearward face (relative to the direction of forward travel of the head 64a and the selection button 18a) an O-ring seal 64c. O-ring seal 64c ensures a gas tight seal between

25 the piston 64 and the cylinder 62 in the position

- 25 -

(Figure 3A) in which the cylinder 62 abuts the panel member 56.

5 Above the first valve chamber housing 58 there is mounted a second and upper valve chamber housing 66 which defines an upper valve chamber 68 accommodating a valve member 70. The chambers 60 and 68 communicate via the passage 58b in housing 58. The valve member 70 has a collar 70a, a depending spigot 70b and an upstanding shaft 70c terminating in a conical cam 70d. Within the valve chamber 68 the valve member 70 is biased into a closed position by a spring 72 and in that position holds a diaphragm 74 in its closed position. The valve member 70 is displaceable to actuate a microswitch 76 by means of the conical cam 70d displacing a microswitch actuator 76a as shown in Figure 3B.

20 The chamber housing 58 has an inlet passage 58a which communicates with the charge line 43. The chamber 68 has an outlet 68a which communicates with a bore 58c through the housing 58 and thence to the charge line 44. It will be recalled from Figure 2 that charge lines 42,43 communicate with the reservoirs 40 and that the charge line 44 communicates from the

- 26 -

selection mechanism 50 to the appropriate concentrate dispensing mechanism 20.

Operation of Concentrate Selection Mechanism 50  
(Figures 3A to 3C)

5 The concentrate selection mechanism 50 as shown in Figure 3A is in its rest position in which the button 18a projects through the selection panel 16. The  
10 cylinder 62 abuts the panel 56. The piston 64 is located such that the piston head 64a abuts the cylinder 62 with the O-ring seal 64c interposed therebetween to seal the same. In this situation the  
15 depending spigot 70b of the valve member 70 depends through the passageway 58b of the housing 58 and is in contact with the cam portion 62b of the cylinder 62. The diaphragm 74 is in its relaxed position and maintained there by the collar 70a of the valve member  
20 70. It will be clear that since the area of diaphragm 74 greatly exceeds the area of the passage 58B, gas pressure in chamber 60 will not normally be able to lift the diaphragm 74. Valve member 70 is biased into that position by the spring 72 acting between the  
25 collar and the upper wall of the housing 66 of valve chamber 68. The diaphragm 74 so arranged prevents the passage of carbonation gas from the chamber 60 passing



- 27 -

through the passage 58b to the upper chamber outlet 68a from which it would then flow through the passage 58c to the charge line 44 and thence the concentrate dispensing mechanism 20. Likewise, the exhaust of gas from the dispensing mechanism 20 through the chamber 60 and then to atmosphere via the piston bore 69B (in the Figure 3B position of piston 64A) or via the charge line and relief valve V3 of Figure 2 is prevented.

10

In the absence of user actuation of the selection button 18a, ~~the selection button 18a~~ and if there is no glass 22 in the dispensing compartment 28 (see Figure 1) then the locking plate 54 will be in the position illustrated in Figure 3A. If a glass 22 is placed in the compartment 28, then the locking plate 54 is moved out of the path of the collar 52a on the shaft 52, thereby enabling the selection button 18a to be displaced.

20

In Figure 3B the selection 18a is displaced into its selection position. Initially this causes displacement of the shaft 52. After a period of free travel corresponding to the thickness of the wall 56, the shaft 52 abuts the cylinder 62 and displaces it. In addition, the forward displacement of the shaft 52

25

- 28 -

causes displacement of the piston 64 such as to cause the piston head 64a to move away from the end 62c of the cylinder. The displacement of the cylinder 62 has caused a displacement of the valve member 70 in the upper chamber 68. The cam portion 62b of the cylinder 62 has displaced the depending spigot member 70b of the valve member 70 upwardly against the bias of the spring 72 where it is held by the main portion 62a (of the cylinder) which acts as a holding means therefor until carbonation gas is supplied. This causes the diaphragm 74 to travel therewith and also causes the upstanding shaft 70c to move upwardly.

As the carbonation gas (from reservoirs 40) enters the chamber 60 and thence through passage 58B to the chamber 68 below the diaphragm 74, then owing to the area of the diaphragm 74 this pressure whilst applied is sufficient to maintain the raised position of the diaphragm 74 against the bias of spring 72.

The upward movement of the shaft 70c of valve member 70 causes actuation of the microswitch 76 by means of the microswitch actuator 76a. Actuation of the microswitch 76 operates a control circuit (not shown) for timed operation of the various solenoids and solenoid actuated valves.

- 29 -

The user releases the selection button 18a. It returns to its initial position as shown in Figure 3C under the influence of the pressure in the chamber 60. This pressure is due to the carbonation gas travelling through the charge line 43 and the inlet passage 58a into the chamber 60. It then passes through the passageway 58b into the chamber 68 below the diaphragm 74, through to the passageways 68a and 58c, and thence to the charge line 44 for the concentrate dispensing mechanism 20 associated with that concentrate selection mechanism 50. As indicated above, the diaphragm 74 is maintained in its raised position (shown in Figure 3C) after the button 18a and therewith the cylinder 62 has returned to the position in which cylinder 62 abuts panel 56 and the portion 62a thereof no longer holds the spigot 70b raised.

#### Concentrate Dispensing Mechanism 20 (Figures 4A,4B)

The construction and operation of the concentrate dispensing mechanism 20 will now be described with reference to Figures 4A and 4B. Four of these mechanisms 20a to 20d are illustrated schematically in Figure 1.

25

The upper surface of the lower housing section 12 is

- 30 -

contoured to receive these concentrate dispensing mechanisms 20 in a releasable fashion. When in situ in the housing, these mechanisms 20 couple the respective concentrate container 14 to the mixing chamber 24 (see Figure 1).

In Figure 4A a concentrate container 14 is illustrated only in part and the means of connection with the concentrate dispensing mechanism 20 are not shown. As mentioned with reference to Figure 1, the containers 14 can be of the bag in the box type with an outer wall 15a, a liner 15b and an opening 15c. It will be readily appreciated that a concentrate container 14 of the bag-in-box type may be provided on its lower surface with a removable strip below which there is a pierceable strip into which a connecting member (not shown) for coupling to the concentrate dispensing mechanism 20 may be inserted. This operation would occur with the dispensing mechanism 20 and concentrate container 14 out of the apparatus 10. The concentrate dispensing mechanism 20 is attached to container 14 and then the assembly so formed placed in the housing 12 with the concentrate dispensing mechanism 20 located in a corresponding recess of the housing (not shown) such that its dispensing outlet mechanism 82 registers with the mixing chamber 24

- 31 -

(Figures 1 and 2). This positioning of the mechanism 20 in a corresponding recess also positively locates the container 14.

5       The concentrate dispensing mechanism 20 comprises a housing 78 defining a concentrate chamber 80 and a outlet mechanism housing 82 communicating therewith. Housing 78 defines an inlet passage 78a from the concentrate container 14 to the chamber 80. This  
10       inlet passage 78a terminates in a valve mechanism 78b which controls the flow of concentrate from the concentrate container 14 to the chamber 80. The valve mechanism 78b comprises a cage 78c in which a ball 78d is captured between an outlet 78e. Outlet 78e is of  
15       reduced area compared with the area of the passage 78a and a seat 78f at the upper level of the cage 78c. The seat 78f is defined by an O-ring seal.

20       The ball 78b opens the passageway 78a in the absence of concentrate in the chamber 80 by resting on the outlet 78e which forms a seat for this purpose. When the chamber 80 is charged with the required volume of concentrate, the ball 78b is seated on the valve seat 78f.

25

The further housing 82 defines an outlet mechanism for

- 32 -

the passage of concentrate from the chamber 80 to a mixing chamber 24 (see Figure 1). The body of the housing 82 defines a first passageway 82a with an enlarged bore 82L at the end thereof communicating with the chamber 80 and also communicating with a valve chamber 82b within the housing 82. Valve chamber 82b in turn communicates with an outlet passageway 82c (which in this embodiment is horizontally inclined) which delivers concentrate via its outlet opening 82d (which in this embodiment is vertically inclined) to the mixing chamber 24. The horizontal and vertical inclinations can be varied to suit the relative positioning of the dispensing mechanism and the mixing chamber. The outlet passageway 82c communicates with the interior of chamber 82b by means of an annular passageway 82e which ensures that all concentrate delivered to the chamber 82b via the passageway 82a is expelled into the passageway 82c. Within the valve chamber 82b, a valve mechanism comprises a diaphragm 82f associated with a valve member 82g biased by a spring 82i arranged between an upper part of the housing 82 and a valve collar 82j on the member 82g. It will be seen that the housing has an aperture 82k through which the valve member 82g projects when raised. The aperture 82k enables venting of air in the upper part of the

- 33 -

chamber 82b when the diaphragm 82f is displaced due to the pressure in the chamber 80. The venting of chamber 82b is merely to allow expansion of the diaphragm 82f.

5

The chamber 80 communicates with a supply of carbonation gas from the reservoirs 40a to 40d via the charge line 44 which is connected to an inlet valve mechanism 84. Inlet valve mechanism 84 comprises an inlet connection 84a, a passageway 84b and an outlet valve 84c. The outlet valve 84c comprises a cage 84d in which a ball 84e is seated on a lower seat 84f in Figure 4A or an upper seat 84g in Figure 4B.

10

15

As described with reference to Figure 2, carbonation gas from the reservoirs 40 is used to dispense a charge of concentrate from the chamber 80. When a charge of carbonation gas is applied along the charge line 44 through the valve mechanism 84, the concentrate in the chamber 80 is forced through the outlet mechanism 82. At the same time ball 78d is forced against seat 78f and prevents gas entering the container 14.

20

- 34 -

When the chamber 80 is empty (or substantially so) and vented to atmosphere via the mechanism 84 and the charge line 44 and/or an associated concentrate selection mechanism 50, concentrate may flow from the concentrate container 14 into the chamber 80 under gravity feed. The chamber 80 charges with concentrate to the level shown in Figure 4B, which is a predetermined level. The inlet valve mechanism 84 has its ball 84e displaced to an upper seat 84g thereby preventing concentrate from leaving via mechanism 84 and the charge line 44 (Figure 2). Similarly, the ball 78d of valve 78b controlling the flow of concentrate from the container 14 to the chamber 80 is seated on the valve seat 78f. The outlet mechanism 82 also has its valve member 82g and diaphragm 82f in its closed position.

Thereafter, a charge of carbonation gas along the line 44 drives the measured quantity of concentrate from the chamber 80 through the outlet mechanism 82 and into the mixing chamber 24 (see Figures 1 and 2). The valve 82g is opened by the pressure of the concentrate which is pressurised by the gas through valve mechanism 84.

25

The dispensing of the concentrate from the chamber 80



- 35 -

is synchronised with the dispensing of carbonated water from the carbonation chamber 26 by means of the operation of the solenoid 52 of Figure 2.

5      **Modified Concentrate Dispensing Mechanism 20'**  
(Figures 5A to 5C)

10      An alternative embodiment of a concentrate dispensing mechanism 20' is shown in Figures 5A, 5B and 5C which respectively show the chamber 80 when it is charged with concentrate, when it is empty of concentrate, and when it is charging with concentrate.

15      The same reference numerals will be employed in describing Figures 5A to 5C as were used for like parts in Figures 4A and 4B. In particular, the container 14 is also of the bag-in-box type with an outer wall 15a, a liner 15b and an opening 15c (defined by a portion of the container wall as shown).

20

25      One modification is that the chamber 80 in this embodiment has a diaphragm 86. This also results in a modification of the means for control of gas via the inlet valve mechanism 84. It also changes the valve 78 for charging of concentrate from the concentrate

- 36 -

container 14. The valve outlet mechanism 82 remains the same and reference numerals 82,82a to 82k will not be further explained.

5 In this embodiment, the inlet mechanism 84' has an inlet passageway 84i which at its inner end communicates with the chamber 80 where it has an enlarged diameter outlet 84j. At its outer end, the inlet passageway 84i communicates with the charge line 10 44. It is sealed at its axial end 84k and it has a radially extending passageway 84l arranged between two O-ring seals 84m. This arrangement at the end 84k of the inlet valve mechanism 84 allows the mechanism 84 to be a push fit into the charge line 44. The O-ring 15 seals 84m ensure that the pressure balances are such that the valve mechanism 84' is not urged away from the charge line 44.

Communication between the container 14 and the chamber 20 80 for the concentrate is via passageway 78a (as in the Figure 4 embodiment). In this embodiment the inlet passage 78a accommodates a tubular member 78g which is sealed therein by means of an O-ring seal 78h and which at its lower end carries a radially 25 outwardly extending flange 78j from which there is a depending skirt member 78i. The tubular member 78g is

- 37 -

threadedly connected by means of threaded connections 78k to the housing 78 in the passageway 78a. As in the Figure 4 embodiment the passageway so defined has an O-ring seal 78f which forms a seat for the ball 78d which acts as a valve member for the control of concentrate from the container 14 into the chamber 80.

The tubular member 78g has a bore through which concentrate flows from the concentrate container 14 into the chamber 80. The depending skirt member 78i determines the volume of the chamber 80 which extends radially outwardly thereof. This volume is the volume of concentrate which is dispensed through the passageway 82a when the carbonation gas issues into the chamber 80 above the diaphragm 86 via the inlet passageway 84i.

At its inner periphery the diaphragm 86 is secured between the flange 78j and the housing 78. At its outer periphery the diaphragm 86 is secured at the location 78l between parts of the housing 78.

When, as shown in Figure 5A, the chamber 80 is full of concentrate the diaphragm 86 adopts a configuration which conforms to the upper and side walls of the

- 38 -

chamber 80. After discharge of the concentrate (Figure 5B), the chamber 80 gas is exhausted via the charge line 44 and the passageway 84i. Then the chamber 80 starts to refill with concentrate (Figure 5C).

The passage 84i communicates with the charge line 44. When this is exhausted, the gas in the chamber 80 above the diaphragm 86 is exhausted to atmosphere and this allows the diaphragm 86 to occupy the position shown in Figures 5A and 5C.

In Figure 5C, the pressure in the chamber 80 is now at ambient pressure and the concentrate flows via the passage 78a (reduced in diameter by the member 78g) into the chamber 80 under gravitational flow. The chamber then fills to the position shown in Figure 5A where the ball 78d comes into contact with the seat 78f and closes the chamber 80. Valve 78b also prevents concentrate re-entering container 14.

When a charge of carbonation gas is admitted through valve mechanism 84, it causes the diaphragm 86 to be forced downwardly to expel the concentrate from the chamber 80. The diaphragm is forced into the position shown in Figure 5B where the chamber is emptied.

- 39 -

During the emptying of the chamber, the outlet mechanism 82 is actuated by the pressure of the liquid concentrate which in turn is determined by the pressure of the gas entering the upper part of the chamber, i.e. above the diaphragm 86.

The diaphragm has the advantage that it separates the carbonation gas entering the chamber 80 through the passageway 84i from the liquid concentrate in the chamber 80. This avoids the issue of carbonation gas through the dispenser outlet 82d which has been known to occur with the embodiment of Figure 4. The separation also ensures that there is no possibility of concentrate entering the inlet passageway 84i at the enlarged diameter outlet 84j. It also closes the outlet passageway 82a (Figures 5A and 5B respectively).

The arrangement shown in Figures 5A to 5C has the advantage that the capacity of the chamber 80 can be modified by the appropriate selection of the depending member 78i. Thus, for different concentrates the chamber volume can be varied in order that a different ratio of concentrate to carbonated water can be dispensed through the mixing chamber 24 into the glass 22 (see Figure 1).

- 40 -

Auto Exhaust Valve V1 (Figures 6A, 6B)

5 The construction of the auto exhaust valve V1 of  
Figure 2 will now be described with reference to  
Figures 6A and 6B. The auto relief valve V1 comprises  
a housing 90 with an inlet passage 90a, and an outlet  
passage 90b and an exhaust passage 90c. The housing  
10 90 is defined by an inner cylindrical casing 90d, an  
outer cylindrical casing 90e, these being joined at  
one end by a first end plate 90f itself being  
contoured to provide the outlet passage 90b and the  
exhaust passage 90c. A second end plate 90g joins the  
inner and outer cylindrical casings 90d and 90e at  
15 their other end and defines the inlet end 90q of inlet  
passageway 90a. The inner cylindrical casing 90d has a  
first aperture 90h which is arranged near the inlet  
end 90q of the passage 90a and which enables said  
passage 90a to communicate with the interior of the  
housing. The interior of the housing is designated the  
20 chamber 90m. Likewise, at the inner end of the  
passage 90a there is an aperture 90i which enables the  
passage 90a to communicate with the chamber 90m.  
Within the housing 90 there is a closed cylindrical  
valve member 90j which is mounted on the inner  
25 cylindrical casing 90d. The valve member 90j is  
biased to close the aperture 90i by means of a spring

- 41 -

90k. Spring 90k is arranged between the housing and a flange 90n. Flange 90n extends outwardly of the open lower end 90r of the valve member 90j. The spring 90k is arranged concentrically with an O-ring seal 90l at the interior of the first end plate 90f and with the exhaust passage 90c.

The inlet passage 90a is arranged to communicate with the gas supply line 38 from the carbonation chamber 26 (Figure 2). The outlet passage 90b is arranged to communicate with the gas supply line 39 extending from the auto exhaust valve V1 to the reservoirs 40. The exhaust passage 90c enables the auto exhaust valve V1 to vent any surplus carbonation gas from the chamber 26 to atmosphere after the reservoirs 40 have been charged.

#### Operation of the Auto Exhaust Valve V1

The auto exhaust valve V1 has as its primary function to exhaust the surplus carbonation gas from the carbonation chamber 26 after the reservoirs 40 have been charged. The gas from the carbonation chamber 26 is controlled by the solenoid valve S1 (Figure 2). It enters the passage 90a and passes through the aperture 90i into the chamber 90m displacing the valve member

- 42 -

90j. It also passes into chamber 90M via aperture 90H. The pressure drop across aperture 90H ensures that there is a pressure differential across the valve member 90j whereby the valve member 90j is displaced.

5 It is necessary that the valve member 90j is a sufficiently close fit on the cylindrical casing 90d in order that this pressure differential is maintained and that the pressure differential is not dissipated by leakage therebetween.

10

As shown in Figure 6A the valve member 90j initially seals the aperture 90i. The exhaust passage 90c is then open and the carbonation gas can flow to atmosphere via aperture 90h from passageway 90a to  
15 chamber 90m and then passage 90c.

20

When valve member 90j is displaced by the pressure of the carbonation gas to close the exhaust passageway 90c, the gas will flow through the passage 90b to charge the reservoirs 40 via the line 39. The valve member 90j is temporarily maintained in the position (shown in Figure 6B) where it closes the exhaust passage 90c. It is held in that position until the pressure differential across the aperture 90h falls  
25 below the level at which it can hold the valve member 90j displaced against the action of spring 90k. This



- 43 -

occurs when the pressure of the surplus (waste) carbonation gas from the carbonation chamber 26 is substantially reduced for example to about 3 to 4 bar (about 50 psig). Once the reservoirs 40 are charged, any surplus carbonation gas passes through exhaust passageway 90c as soon as valve member 90j leaves valve seat 90l.

Multifunction Pressure Release Valve V3 (Fig. 7)

The pressure relief valve V3 has a housing 100 which defines a chamber 100a. A top wall 100b defines an exhaust and valve passageway 100c in which a valve shaft 100d is reciprocally displaceable. Valve shaft 100d has at its upper end a connector (which here is in the form of a closed eyelet) for connection to the solenoid S2 of Figure 2. The valve shaft 100d carries a valve member 100f and a valve collar 100g and terminates in its lower end 100i. The lower end 100i in one position of the valve shaft 100d can depend into a passageway 100j. The passageway 100j is defined by the housing and extends through a projecting connector 100k. The projecting connector 100k is connected to the charge line 42 leading to the reservoirs 40 (see Figure 2). Another passageway 100m extends through a projecting connector 100n which is

- 44 -

connected to a charge line 43 from the pressure relief valve V3 to the concentrate selector mechanisms 50 with their buttons 18 (see Figure 2). The valve shaft 100d is associated with a sealing ring 100p which surrounds the lower end 100i thereof and is arranged concentrically with the passageway 100j at the chamber outlet. Another sealing ring 100q is arranged about the valve shaft 100d immediately above the valve member 100f and in contact therewith. The housing further defines an outer extension 100r of the valve passageway 100c and an inner extension 100s thereof. The inner extension 100s has a cavity 100t at its lower end. A valve spring 100h is arranged between an inner surface 100u of the top wall 100v and the collar 100g so as to bias the valve shaft 100d downwardly in the chamber towards an interior surface 100v of a bottom wall 100w. The passageway 100m extends through a sidewall 100x which is opposite the sidewall 100y as shown in Figure 7. The chamber 100a itself may be cylindrical and therefore these references to opposite sidewalls refer that wall as seen in cross-section. The spring 100h is arranged concentrically with the passageway 100c, the valve shaft 100d, the valve member 100f, the valve collar 100g, and the inwardly depending extension 100s.

- 45 -

### Operation of the Pressure Relief Valve V3

5 The operation of the relief valve V3 to pass carbonation gas to the dispensing mechanisms 20 (see Figure 2) is controlled by the displacement of the shaft 100d by the solenoid S2 (of Figure 2). It also acts to exhaust the dispensing mechanism and it also acts as a pressure relief valve as will be explained.

10

As shown in Figure 7 the valve shaft 100d is in a lower position in which the lower end 100i is about to enter the passageway 100j and the O-ring 100p ensures that the valve collar 100g seals that passageway. If one of the concentrate selection mechanisms 50 of Figures 3A to 3C is actuated to allow the flow of carbonation gas from a dispensing mechanism 20 to flow to exhaust, then that gas passes along the line 43 and into the chamber 100a of the pressure relief valve and exits through the exhaust passageway 100c.

15  
20

When the solenoid S2 is actuated to charge the dispensing mechanism 20 with a charge of carbonation gas to dispense a measured quantity of concentrate, then the solenoid S2 raises the valve shaft 100d. This brings the valve member 100f into a position

25

- 46 -

juxtaposed with the interior extension 100s such that the O-ring seal 100q is compressed in the cavity 100t thereof to seal the exhaust passageway 100c. Carbonation gas from the reservoirs 40 can then flow  
5 along the charge line 42 into the passageway 100j and out through the passageway 100m via charge line 43, the selection mechanism 50 and to the dispensing mechanism 20 to thereby discharge a measured quantity of concentrate. After a timed interval the solenoid S2  
10 returns the shaft 100d to its lower position (Figure 7) in which the passage 100j is again sealed off.

This valve V3 also acts as a pressure relief valve in the event of a malfunction causing the pressure in the  
15 charge line 42 (and thus the passageway 100j) to become excessively high, for example due to the reservoirs 40 being charged to a pressure level well beyond that required for driving the dispensing mechanisms 20. In that event, the gas pressure acting  
20 on the valve collar 100g of the valve member 100f causes the valve member 100f to be displaced thereby permitting the gas to vent to atmosphere through the exhaust passageway 100c. This flow of gas through  
25 passageway 100c continues until the gas pressure in charge line 42 is reduced to its desired level

- 47 -

whereupon valve 100f closes on the seat 100p under the bias of spring 100h.

Carbonation Apparatus of Figures 8, 9A and 9B

5

10 In Figure 8 there is a schematic diagram of a carbonation apparatus (generally similar to that of Figure 1). The carbonation chamber 110 is surrounded by a cooling jacket 120. Both the carbonation chamber 110 and the cooling jacket 120 are supplied with water 126 therein from a refrigerating tank 130. The tank 130 is refrigerated by means of the refrigerant compressor 140. Refrigerant circulates in the coil 142 which co-operates with the coil 144 in the tank 15 130 to chill the water supply. The tank 130 contains water which is cycled via a supply line 134 and a pump 136 to the cooling jacket 120 and returns via a return line 132. The water supply for the chamber 110 comes from a mains supply at 150 via a flow controller 152 and a solenoid valve 154. It passes through the coil 20 144 in the tank 130 and along a supply line 156. It issues through a water inlet 158 to an upper chamber 112 of the carbonation chamber 110. This upper chamber 112 provides a water supply break between the 25 mains water supply 150 and the agitating chamber 114. Upper chamber 112 is vented to atmosphere through a

- 48 -

vent 166. This upper chamber 112 has a baffle 118 which shields sensing means 160 from the water issuing from the inlet 158. Within the agitating chamber 114 there is an inlet conduit 162 which houses a valve 164 comprising a ball 166 and cage 168 for controlling the flow of water into the chamber 114. Also within the chamber 114 is an agitator means 170 for assisting in the carbonation of the water by mechanically forcing carbonation gas from the head space above the water downwardly into the body of the water. It has a horizontal shaft 170a and vertical paddles 170b and is driven by a motor (not shown) under the control of a control circuit (not shown). Metering means 180 meters the level of the water in the chamber 114. This metering means 180 comprises a float valve 182 which is guided in a channel 184 as the water level rises until the float valve 182 itself comes into contact with seal 186. At the same time an upper end 188 of the float valve 182 comes into contact with the sensing means 160. The sensing means 160 is electrically connected to the control circuit which sequences the operation of the apparatus. Valve means 190 control the flow of carbonated water from the agitating chamber 114. This valve means 190 is connected to a beam 192 which is pivoted at 194 and at 196. The valve means 190 is controlled by a solenoid

- 49 -

200. As the valve means 190 moves up, carbonated water flows from the chamber 114 into a glass 22. A reservoir 210 for the supply of carbon dioxide is connected by means of a supply line 212 and a supply line 214 to the inlet 216 at the agitating chamber 114. A further line 218 from the supply line 212 (and thus reservoir 210) connects with a concentrate dispensing mechanism 20 associated with a concentrate container 220. The concentrate dispensing mechanism 20 (Figure 1) is arranged to issue metered quantities of concentrate (flavouring or syrup) into the glass 22 simultaneously with the supply of carbonated water from the tank 114. Dispensing mechanism 20 is shown linked to concentrate container 220 by a concentrate supply line 222: this arrangement is schematic and reference is made to Figures 4A, 4B and 5A to C which are intended to illustrate the relationship employed in the apparatus of Figure 8 also.

The apparatus of Figure 9A includes the carbonation chamber 100 of Figure 8. Components already described have the same references. In Figure 9A, the water is issuing from inlet 158. The ball 166 of the valve 164 normally floats and is forced downwardly by the supply of water. The supply of water through the upper chamber 112 continues to maintain the ball 166 in a

- 50 -

depressed condition in which it cannot seat on an O-ring seal 167. This is especially advantageous since the ball 166 and cage 168 afford a very efficient and very inexpensive form of valve for controlling the supply of water to the agitating chamber 114. Termination of the flow of water into the chamber 114 via the upper chamber 112 occurs when the float valve 182 contacts the seal 186 (as shown in Figure 9B) simultaneously with the upper end 186 of the float valve 182 actuating the sensing means 160. This actuates the solenoid 154 (Figure 8) to cut off the water supply through the water inlet 158. During the filling operation, the lower chamber 114 is continually vented by the upper chamber 112 through the vent 116 to atmosphere. The upper chamber 112 provides a break in the water supply between the inlet 158 and the water in the chamber 114. Once the water supplied through the inlet 158 ceases, communication between the chamber 114 and atmosphere through the vent 116 via the upper chamber 112 also ceases. The apparatus is then ready for the next stage of operation which is the carbonation of the water in the agitating chamber 114. This occurs when the carbon dioxide from the container 210 is supplied via the carbonation gas lines 212, 214 and inlet 216. The agitator means 170 is rotated for a finite duration.



- 51 -

Thereafter the carbonation water can be dispensed through the valve means 190 under the control of solenoid 200 into a glass 22.

5      Flow Controller 152

Figure 10 shows the flow controller 152 of Figure 8. In flow controller 152, water supplied to the inlet 224 passes into the flow controller 152 via a  
10 regulator member 226 which has passageways therein 228 and 230. The passageway 228 extends axially of the regulator member 226 along part of its length to where it joins the passageway 230 which extends radially thereof so as to issue at opposite sides. The  
15 regulator member 226 is biased by spring 232 arranged coaxially therewith. The chamber 234 within the housing 236 fills with water which issues through the outlet 238 about which the spring 232 extends concentrically. The end 226a of the regulator member  
20 228 is of reduced diameter thereby to provide a seat for spring 232.

The flow controller 152 operates in the following manner: the increase in pressure at the inlet 224  
25 causes the regulator member 226 to move further across the chamber 234 (to the right as shown in the drawing)

- 52 -

5 towards the outlet 238 against the bias of the spring  
232. This reduces the space between the regulator  
member 226 and the outlet 238. This movement  
effectively reduces the flow rate of water from the  
outlet 238. Conversely, a reduction in the inlet  
10 water pressure at the inlet 216 will allow the spring  
232 to displace the regulator member 226 (to the left)  
away from the outlet 238 and thereby increase the  
space between the regulator member 226 and the outlet  
238. This latter action has the effect of increasing  
the flow rate of water through the outlet 238 and the  
flow from the chamber 234. Thus, the flow controller  
15 152 clearly assists in regulating the water supply to  
the chamber 110.

#### The Gas Supply Changeover Mechanism

20 In Figure 11 there is shown the housing 12 of the  
carbonation apparatus 10 of Figure 1. In this rear  
view, part of the housing casing is removed. The  
upper rear portion as in Figure 1 has a central  
portion 13a and a rear portion 13b part of which  
houses the changeover mechanism 300. In this view it  
will be seen that the changeover mechanism 300 is in  
25 communication with gas supply bottles 302 and 304 for  
the supply of carbonation gas (carbon dioxide) which

- 53 -

sit on respective bottle holders/supports 306,308 on the interior base 310. The changeover mechanism 300 comprises a lower housing 312 which depends from an upper housing 320.

5

In Figure 12 a cover plate of the changeover mechanism 300 has been removed so that one side of the mechanism within the housing 320 is visible. Within the housing 320 there are a pair of bottle connector housings 330 and 332. Each housing 330,332 is provided with a gas flow coupling member 330a,332a and fastener means 330b,332b and hose means 330c,332c for carrying the carbonation gas to the carbonation chamber (26, Figure 2). The upper housing 320 itself has moulded openings 334 and 336 for the bottles 302 and 304 (Figure 11). Each housing 330,332 has an associated actuator lever 338,340 which is actuated to open a respective valve (not shown) in the housing 330,332 to allow the passage of gas from a respective one of the bottles 302,304 via the respective coupling member 330a,332a through the valve and out through a hose 330c,332c.

A solenoid 342 is provided to drive the changeover mechanism 300. This solenoid extends into the lower housing 312 (also Figure 11). The solenoid 342 is biased by a spring 342b acting upwardly on the collar

- 54 -

342a. The solenoid 342 is connected to a transfer member 344. It is the transfer member 344 which determines which of the actuator levers 338,340 is depressed and therefore which of the bottles 302,304 supplies gas to the carbonation chamber.

The transfer member 344 comprises a yoke member with lower limbs 344a each having a boss 344b for co-operation with a guide pin 344c about which it can toggle. The guide pin 344c is guided in a guide slot 346 of the housing 320 which has a slot wall 346a. The transfer member 344 also comprises upper limbs 344d. The upper limbs 344d carry a toggle member 348 with toggle arms 348a,b and a central boss 348c through which extends a pivot pin 348d about which the toggle member is pivotal. Toggle arms 348a,348b each comprise a pair of wings which are spaced wider than the width of the respective actuating levers 338,340. Toggle member 348 co-operates with toggle actuators 368,372 (as will be described) which are carried by (or integral with) the actuating levers 338,340 and extend so as to be contacted by the toggle member 348 when the arms 348a or 348b pass downwardly relative to the respective actuating lever 338 or 340.

- 55 -

The guide pin 344c is constrained to follow the slot 346 in the housing 320. A further slot 352 is defined by an aperture bound by a slot wall 352a. The housing 320 supports a toggle guide 350 integral therewith which has a generally inverted V-shape defined by limbs 350a,b terminating at their lower end in respective bosses 350c,d defining central apertures 350e,f through which actuator pins 360 are reciprocated. The means for reciprocating the actuator pins 360 will be further described in relation to a separate actuator mechanism on the other side of the changeover mechanism behind a wall 370.

A biasing member 362, which is resiliently deformable, is associated with toggle member 348. The biasing member 362 has a lower boss 362a attached to the transfer member 344 and displaceable therewith. The upper end of the biasing member 362 comprises an upper boss 362b which is coupled to the central boss 348c of the toggle member 348 such that as the toggle member is pivoted about its pivot pin 348d, so the configuration of the biasing member 362 changes in a resiliently deformable manner to be further illustrated.

25

The toggle member 348 co-operates with stops 364 and

- 56 -

366 which are integral with the back plate 370 of the housing 320.

Operation of the Change Over Mechanism (Figures 13A to 13X)

5

The operation of the changeover mechanism and in particular the portion thereof associated with the transfer member 344 and the toggle member 348 will now be described with reference to Figures 13A to 13H, 13I to 13P, and 13Q to 13X which as aforesaid show three phases of operation of the changeover mechanism.

10

Turning to Figures 13A to 13H, these show continuous operation using the actuator lever 338 which would actuate the valve in housing 330 (Figure 12) and thereby use gas from the cylinder 302 (Figure 11).

15

In Figure 13A, the changeover mechanism 300 is in its initial position in which the toggle member 348 sits with its central boss 348c at the top of slot 352 (slot 352 is best seen in Figure 13D). It will be noted that the toggle 348 is biased so that the limbs 348a depends downwardly relative to the limbs 348b due to the position of the biasing member 362 which is flexed towards the limbs 348b. As the solenoid 342

20

25

- 57 -

pulls the transfer member 344 downwardly (as shown in Figure 13B), the limbs 348a of the toggle member 348 contact toggle actuator 368 and acts as a cam follower along same: it will be noted that the undersides of the limbs 348a and 348b are contoured, that is to say, inclined upwardly towards the central boss 348c at the middle of the toggle member so as to provide these cam surfaces. As shown in Figure 13C, the boss 348c of the toggle member is brought into contact with the downwardly inclined limb 350a of the toggle guide 350. It can be seen from Figures 13B and 13C that the camming action of the toggle arms 348a on the stop 368 and the camming action of the central boss 348c on the toggle guide 350 take the transfer member 344 towards the lever 338 so that in the position shown in Figure 13D the toggle member 348 is about to actuate the actuator lever 338. In Figure 13D it will be noted that the underside of the boss 348c (of the toggle member 348) actually contacts toggle actuator 368 of the actuator lever 338: the arms 348a are wider than lever 338 and thus do not contact same. At the same stage, the toggle arms 348a have proceeded downwardly to a position in which the toggle actuator 368 is now centred between the toggle arms 348a,b. In Figure 13E, the solenoid 342 has reached its downward limit and the toggle member 348 is changing its orientation

- 58 -

after the toggle arms 348a have contacted the stop 364 on the back plate 370 (Figure 12). This causes the toggle member to pivot about the pin 348d and turn clockwise. In making this clockwise movement, the toggle member 348 causes the biasing member 362 to flip from the position (Figure 13D) in which it is resiliently deformably extending towards the limbs 348b to the position shown in Figure 13E in which it is resiliently deformably extending towards the limbs 348a.

It will be noted that in Figure 13A, the actuator pins 360, which can project through the bosses 350c and d of the toggle guide 350, are retracted. When the solenoid 342 is actuated to move downwardly as shown in Figures 13B to 13D the pins 360 remain retracted. The pins 360 remain retracted when the solenoid 342 starts its upward journey (Figure 13F). An actuator mechanism for the actuator pins 360 will only return pins 360 if there is a gas supply issuing from the appropriate gas bottle (in this case the bottle 302).

In Figure 13F, the pins 360 have been returned so that they extend through the bosses 350c,d. Thus, as the solenoid 342 and the transfer member 344 are raised,



- 59 -

the toggle member 348 comes into contact with one of the pins 360. In this Figure 13F, it is the arms 348a which contacts a pin 360. This causes the toggle member 348 to make a counterclockwise motion again causing the biasing member 362 to flip back into its initial position as shown in Figure 13G. The transfer member 344 continues its upward movement into the position shown in Figure 13H which corresponds to the position in which it started in Figure 13A. The actuator pins 360 are again retracted since the return of the actuator lever 338 to its initial position shuts off the gas supply through the hose 330c.

The operation of the changeover mechanism 300 in changing from one gas cylinder 302 to the other gas cylinder 304 (Figure 11) will now be described with reference to Figures 13I to 13P. The sequence of operations in Figures 13I to 13M are similar to those shown in Figures 13A to 13E. The significant change appears in Figure 13N when the solenoid 342 starts its upward movement there is no actuator pin 360 at the boss 350c of the toggle guide 350. In consequence, the toggle member 348 does not make the counterclockwise motion which appears from Figures 13F and 13G under the influence of actuator pin 360. Instead, as the transfer member 344 raises the

- 60 -

(Figures 13N and 13O) toggle member 348 maintains substantially the same attitude and the biasing member 362 remains biased towards the limbs 348a. Consequently, when the changeover mechanism 300 has completed its cycle as shown in Figure 13P, the toggle member 348 is now in an attitude where the limbs 348b are below the limb 348a and the biasing member 362 extends towards the limbs 348a.

5 The operation of the changeover mechanism 300 with the continuous operation using the gas cylinder 304 will now be described with reference to Figures 13Q to 13X. In this cycle, it is the actuating lever 340 which is depressed. It will be noted that the toggle member 348 is biased into a clockwise attitude in which the limbs 348b depends below the limbs 348a. In its initial position in Figure 13Q the biasing member 362 is in a position in which it is deformed towards the toggle arms 348a. By virtue of that initial inclination, the toggle member 348 will actuate the actuator lever 340 which causes the valve in housing 332 associated with the bottle 304 to be opened (Figure 12). The sequence of operations followed by the changeover mechanism 300 through Figures 13Q to 13U are similar to those described with reference to Figures 13A to 13E (or Figures 13I to 13M), except

- 61 -

that in this instance it is the toggle arms 348B which are actuating the lever 340 and co-operating with toggle actuator 372 thereby allowing use of the gas in the cylinder 304.

5

The main difference now arises in Figure 13V where, when the transfer member 344a rises, the actuator pin 360 is again present. However this time it is the actuator pin 360 through the boss 350d which is effective to co-operate with the arms 348b of the toggle member 348. As it moves from Figures 13V to 13W, so the toggle member 348 is rotated clockwise causing the biasing member 362 again to flip from the position (Figure 13V) in which it is biased towards the toggle arms 348b towards the position (Figure 13N) in which it is biased towards the toggle arms 348a. The transfer member 344 continues its upward journey to the position shown in Figure 13X in which the pins 360 are shown extended.

10  
15  
20

It will be seen that in the above sequence of operations of the transfer member 344 together with the toggle member 348, that it is the actuator pins 360 which determine whether it is the toggle arms 348a which contact the toggle actuator 368 to actuate the actuator lever 338 and thus the supply from bottle 302

25

- 62 -

or whether it is the toggle arms 348b which contact the toggle actuator 370 to actuate the actuator lever 340 and therefore the supply from bottle 304. The mechanism for withdrawing and extending the actuator pins 360 will be further described.

#### Reciprocating Mechanism (Figures 14A to 14C)

The mechanism for reciprocating the actuator pins 360 of the changeover mechanism 300 is shown in Figures 14A to 14C.

In Figure 14A, the opposite side of the upper housing 320 of the changeover mechanism 300 is shown. On this side a cover plate is removed to show the internal mechanism for reciprocating the actuator pins 360. This mechanism is separated from the mechanism shown in Figure 12 by the back plate 370. In this Figure, the hoses 330c and 332c (shown in Figure 12) for the gas bottles 302, 304 (shown in Figure 11) can be seen extending from a shuttle valve 380. The openings 334 and 336 for the gas bottles 302 and 304 are again shown.

- 63 -

In terms of mounting the mechanism for reciprocating the actuator pins 360, the back plate 370 is provided with the following features. The back plate 370 has a pair of bosses 370a,b which are arranged for the securing of the cover plate (not shown). It has a support 370c for mounting a shuttle valve 380. It has a support 370d for mounting an actuator means 386. It has supports 370e,f for a toggle mechanism 390. It has apertures 370g (Figure 14C) which permit the actuator pins 360 to reciprocate. These apertures 370g are aligned with the apertures 350e,f of the bosses 350c,d in Figure 12. It is also provided with further supports 370h for the toggle mechanism 390.

The shuttle valve as well as having the hoses 330c and 332c connected thereto, has further hoses 382 and 384. The hose 382 connects the shuttle valve 380 with the carbonation apparatus of Figures 1 or 8. The hose 384 connects the shuttle valve 380 with the actuator means 386.

The actuator means 386 is responsive to a pressure signal from the shuttle valve 380. The actuator means 386 comprises a plunger 386a which reciprocates against the bias of an internal spring. Actuation occurs when the gas pressure through the hose 384 is

- 64 -

sufficient to overcome the bias of the spring. The plunger 386a is connected to a yoke 386b which carries a shaft 386d for connection to a toggle mechanism 390. The hose connector 386c receives the hose 384 from the shuttle valve 380.

5

The toggle mechanism 390 comprises a first toggle member 390a which is pivotally connected to the shaft 386d of the actuator means 386 (Figure 14B). The toggle member 390a is itself fixedly connected to a shaft 390b. The shaft 390b is journalled in the supports 370e and f which extend from the back plate 370. The toggle shaft 390b has a pair of spaced toggle members or cranks 390c integral therewith. The toggle members 390c carry a toggle shaft 390d which is journalled thereto. The toggle shaft 390d has reduced end portions 390f (Figure 14C) for the purpose of being journalled to the toggle members 390c. These end members 390f are integrally connected to a pair of spaced toggle members 390e which themselves carry the actuator pins 360.

10

15

20

#### Operation of the Reciprocating Mechanism (Figures 14A to 14C)

25

The operation of the mechanism shown in Figures 14A to

- 65 -

C will now be described. The shuttle valve 380 is pneumatically switched but only when the condition in one of the gas bottles 302,304 changes. Within the housing of the shuttle valve 380 there is a reciprocating valve member. Assuming that the gas bottle 302 is in use and is supplying carbonation gas under pressure, then the shuttle valve will be switched so that carbonation gas can pass through the hose 330c into the shuttle valve 380 and exit through the hose 382. At this time the shuttle valve within the housing 380 will be positioned such as to seal off and prevent communication between the hose 332c for the gas bottle 304 and the exit hose 382 carrying carbonation gas to the carbonation apparatus. The presence of carbonation gas within the shuttle valve 380 will ensure that the gas entering through the hose 330c exerts a pressure signal through the hose 384 to permit operation of the actuator means 386. The actuator means 386 operates when the pressure of carbonation gas through the hose 384 is sufficient to overcome the bias of an internal spring which in the absence of the carbonation gas holds the plunger 386a retracted. The actuator means 386 in Figure 14A retracts the actuator pins 360 whenever the gas pressure through hose 384 is insufficient to extend the plunger 386a. In this way, we have the situation

- 66 -

depicted in Figures 13A to 13E in which the actuator pins 360 are withdrawn. In the event that the actuator means 386 detects pressurised gas through the hose 384, then as indicated in Figure 13E the actuator means 386 extends its plunger 386a upwardly. This actuates the toggle mechanism 390 to return the actuator pins 360 to the position in which they extend through the bosses 350a and b of Figure 12. This will bring about the state of the changeover mechanism 300 shown in Figures 13E and 13F in which the actuator pins 360 are again extended.

Once the actuating lever 338 returns to its initial position (Figure 13F), then gas flow through hose 330c (Figure 12) and hence hose 384 ceases. In consequence actuator means 386 retracts the actuator pins 360 as shown in Figures 13G and H.

If the actuator means 386 does not receive a pressure signal through the hose 384, then the actuator mechanism does not permit the plunger 386a to be upwardly extended. Then, the situation occurs as in Figure 13M (and therefore Figure 13N) that the actuator pins 360 are not extended and a changeover may take place. When a changeover takes place, the position of the shuttle valve within the shuttle valve



- 67 -

housing 380 will automatically be switched over because one of the hoses 330c,332c which will formerly have been active, will now be reduced to a very low pressure status whereas the other of the hoses  
5 330c,332c which was formerly inactive will carry the pressure medium (i.e. the carbonation gas). In consequence the shuttle valve within the shuttle valve housing 380 will switch positions.

10 The operation of the actuator means 386 and the toggle mechanism 390 is best appreciated from Figures 14B and 14C. These Figures clearly illustrate that as the actuator means 386 extends and retracts it plunger 386a, so the pins 360 will be retracted and extended  
15 with respect to the apertures 370g of Figure 14C. In consequence the actuator pins 360 will also reciprocate with respect to the correspondingly aligned bosses 350a and 350b with their apertures 350c and 350d in Figure 12.

20 It should be mentioned that if neither of the gas bottles 302,304 are charged with carbonation gas, then the actuator pins 360 will not be extended but instead will be continuously retracted. The changeover  
25 mechanism will repeatedly changeover and keep searching for a gas supply. It will be readily

- 68 -

appreciated that it is possible to have illuminated indicators indicating the status of the gas bottles so that the user can be warned when each of the gas bottles 302,304 is emptied.

5

### Variable Carbonation

Reference is now made to the apparatus shown in Figure 15 which diagrammatically shows the apparatus of Figure 1 with the concentrate containers 14a and 14b displaced (to the left in relation to the drawing) in order to illustrate the means by which the carbonation period for the carbonation of water in the carbonation chamber 26 may be varied according to the nature of the concentrate in the containers 14a to 14d. Like reference numerals are used in Figure 15 as apply to their counterparts in Figures 1 and 8: parts bearing similar reference numerals may not be described in relation to this Figure. The illustration of Figure 15 is schematic and therefore the housing 12 is shown as having a planar support surface 12a to receive the dispensing mechanisms 20a to 20d. In practice, the support surface 12a is moulded to provide recesses for the dispensing mechanisms 20a to 20d. Likewise, although the central upper portion 13a of the housing is illustrated, the rearward upper portion 13b of

10

15

20

25

- 69 -

Figure 1 is not illustrated. In addition, the carbonation chamber 26 is shown somewhat diagrammatically and the valve means 190 is shown as a depending spout.

5

It is desirable to vary the degree of carbonation of the water in the carbonation chamber 26 according to the nature of the concentrate selected for the drink to be dispensed into the glass 22 (Figure 1). The duration for which the agitator means 170 (Figure 8) operates, can be varied by varying the duration during which the motor which drives the agitator means 170 is driven according to a control circuit. In order to vary the duration of the carbonation period or at least the period during which the agitator means are operable, it is necessary to advise the control circuit as to the nature of the concentrate being dispensed.

10  
15  
20

For this purpose, the apparatus of Figure 15 comprises sensors 400a,b,c and d and information carriers 410a,b,c, and d. The purpose of the sensors is to obtain a signal which can be input to the control circuit operating the motor for the agitator means 170. This signal may indicate whether the carbonation

25

- 70 -

time period is to correspond to a given level of carbonation: bands such as "low", "medium" and "high" may be designated. By providing the sensors 400a to d in appropriate positions on the sidewalls 13c and 13d of the upper housing central portion 13a, and complementarily disposed information carriers 410a to d on the containers 14a to 14d it is possible to provide such signals.

10 It is important that the information carriers 410a to d should be so disposed and of such dimensions as to be aligned with the sensors 400a to d. The physical phenomena employed for this sensing operation may vary. The main requirement is that the information  
15 carriers contain the data, for example information indicating "low", "medium" or "high", can be accurately reproduced on a small label which can be applied to the container. It is readily apparent that laminates are available for such labels which may  
20 comprise a surface carrier layer for carrying the information and a base layer carrying for example an impact adhesive to be applied to the container 14 and that layer may, prior to application, be covered with a removable masking layer. The information layer may  
25 contain data in such forms as a coded magnetic strip or a bar code or an electrically conductive strip or

- 71 -

light reflecting surface. The sensors 400a to 400d will be adapted to "read" such information carriers 410a to d accordingly.

5 Again, there are two possibilities. The sensors 400a to d may either be capable of distinguishing between information carriers bearing coded information so as to indicate one of a plurality of levels of carbonation (as in the example of "low", "medium" and  
10 "high" given above). Alternatively, the location of the information carrier 410a to d may be varied according to the degree of carbonation required and a plurality of sensors for example a plurality of sensors 400a may each be arranged in discrete  
15 positions corresponding to the position of an information carrier for a given degree of carbonation.

20 In the former case where the information carriers 410 are coded to indicate different levels of carbonation requirement, the control circuitry associated with the sensors 400 will need to distinguish between different signals. In the latter case where there are a plurality of sensors 400 for each concentrate  
25 container 14, then the control circuitry will be adapted to identify which of the respective sensors

- 72 -

400a1, 400a2, 400a3, has received a signal from the respective information carrier 410.

5 In a further development of the application of the use of sensors 400 and information carriers 410, it is possible to have in the control circuitry an additional facility for indicating whether a concentrate container placed in a particular position for example the concentrate container 14a, has a  
10 secondary information carrier 410a' indicating that it contains a concentrate which is associated with a label on the related selection button 18a: for example, the concentrate container 14a could be intended to dispense drinks with an orange flavour and  
15 the selection button 18a could indicate that the drinks dispensed by that button had an orange flavour; then the secondary set of sensors and information carriers could be employed to illuminate an indicator associated with the selection button 18a to indicate  
20 that the orange flavoured drinks were available to the user.

Applicants have found that the quality of drink dispensed varies according to the carbonation period  
25 and the particular concentrate employed so that for example a "cola" flavoured drink requires a different

- 73 -

level of carbonation in the water to an "orange" flavoured drink. The associated control circuitry would be set up at the factory to predetermine the carbonation periods according to the flavour of concentrate to be dispensed at the particular positions indicated for the containers 14a to 14d.

#### Cooling of the Concentrate Containers

Reference is made to Figures 1, 8 and 15. In Figure 1 the containers 14 are within the compartment covers 13c which insulate the containers 14 from the ambient conditions. In Figure 8 the carbonation chamber 110 and in particular the agitating chamber 114 is surrounded by a cooling jacket 120 containing the chilled water 126. The cooling jacket 120 receives the chilled water from the refrigerating tank 130. The outer walls of the cooling jacket 120 are made of highly conductive material in order that the cooling jacket 120 not only chills the water in the carbonation chamber 110, but also chills the concentrate in the concentrate containers 14a to 14d. It will be seen that containers 14 are in close contact with the wall of the cooling jacket 120.

Turning to Figure 15, it will be seen that the wall

- 74 -

configuration of the upper central portion 13a of the housing 12a allows the containers 14a to 14d (which are further illustrated in Figures 4A and 5A) with correspondingly configured wall surfaces to be brought into immediate contact. Within the compartments described with reference to Figure 1 the seating of the containers 14 (and the dispensing mechanisms coupled thereto in associated recesses previously described) assist in maintaining the required relationship. By arranging for the outer wall of the cooling jacket 120 is to be formed of highly thermally conductive material, an arrangement is afforded whereby the concentrate in the containers 14a is very effectively chilled by the same medium that is employed for chilling the carbonated water. This design is particularly efficient and avoids additional cooling systems which have been employed in other drink dispensers, some of which involve complicated ducting systems for circulating chilled air. The aforementioned feature enhances the operation of the carbonation apparatus whilst reducing the engineering costs in providing for the cooling of the concentrate in the concentrate containers.



- 75 -

Turning to Figure 16, there is shown part of the carbonation apparatus 10 of Figure 1, which illustrates a compartment 13d for concentrate containers 14a,14b (of Figure 1). This compartment  
5 13d has a groove 13e on the rear portion 13b of the housing to locate a top wall cover 13c (Figure 1), grooves 13f,13g on the rear portion 13b of the housing and on the main housing 12 respectively to locate edges of a side wall of said cover 13c, and groove 13h  
10 at the front of the housing 12 to locate a front wall of the cover 13c.

The grooves 13g and 13h are bound by abutments (or ridges) 17a and 17b. Further abutments 17c,17d extend  
15 between the abutment (or ridge) 17a and a wall 121 of the cooling jacket 120 (Figure 8). Abutment 17c divides the compartment 13d internally into two sub-compartments for the containers 14a,14b. The abutments 17a and b are shown as extending wholly  
20 along the full length of the respective parts of the housing 12. Likewise the abutments 17c,d are shown as extending continuously between the groove 13g and the wall 121. It will be appreciated that these need not be continuous, but that they could be segmented (with  
25 regular or irregular spacing).

- 76 -

5 The abutments 17a to 17d are for positively locating the containers 14a,14b. Similar abutments are provided in the other compartment 13d on the opposite side of the upper central portion 13a of the housing for positively locating containers 14c,d.

10 In addition, Figure 16 shows recesses 19a,19b to accommodate the dispensing mechanisms 20a,b (shown schematically in Figure 1). Like recesses 19c,d (not shown) are provided in the other compartment 13d for dispensing mechanisms 20c,20d.

#### Control Circuit 500

15 A control circuit 500 is shown in block diagram in Figure 17 in which a number of input means are coupled to a control unit 510 (which includes a microprocessor) to control outputs to a number of active components in the carbonation apparatus 10.

20 The first input component is the start switch referenced 76. The microswitch 76 is shown in Figure 3A and is actuated when a particular one of the concentrate selector mechanisms 18a to 18f is actuated  
25 by the user pressing a respective one of the buttons on the front panel 16 (Figure 1). The microswitch 76

- 77 -

sends a signal to the control unit 510 indicating that a carbonation cycle should be initiated. The next input component is the sensor which is arranged in the dispensing compartment 28. As explained with  
5 reference to Figures 1 and 3A it is necessary for the user to place a glass 22 in the dispensing compartment 28 in order that the sensor sends a signal to the control unit to indicate that a glass 22 is present whereby the locking plate 54 actuated by a solenoid  
10 (not shown) is displaced from its Figure 3A position to permit the chosen one of the selection buttons 18a to f to be actuated.

The next input component is the sensor 160 associated  
15 with the water meter means 180 in Figure 8. When the meter means 180 is in the position shown in Figure 8, the signal via sensor 160 instructs the control unit to start the water supply by means of pump 154. When the meter means 180 is in the position shown in Figure  
20 9B, the signal from the sensor 160 instructs the control unit to stop the supply of water and the control unit 510 stops the pump 154.

The next input component is the changeover mechanism  
25 300. As mentioned in the description of the changeover mechanism, the changeover mechanism may

- 78 -

send a signal to the control unit 510 when the changeover mechanism 300 changes condition (as previously described) in response to one of the gas bottles reaching a low pressure level. The signal to the control unit 510 will be used to illuminate an indicator on panel 16 of Figure 1 (not shown) indicating that the particular gas bottle 302 or 304 requires replacing.

10 The next input components are the sensors 400a to d of Figure 15 which detect the degree of carbonation required by the concentrate container 14 in the respective compartment 13d associated with the particular sensor 400a to d. The control unit 510  
15 will have timer circuits which are selected to output a carbonation period to the agitating means 170: the agitating means 170 will then be driven by its motor for a period related to the desired carbonation level.

20 The output components from the control unit 510 will now be described. Solenoid S1 is shown in Figure 2 and controls the flow of redundant carbonation gas via the line 38 from the carbonation chamber 26 to the  
25 reservoirs 40a to 40d for subsequent use in dispensing concentrate from a selected one of the concentrate

- 79 -

dispensing mechanisms 20a to d. There is a timer circuit in control unit 510 whereby solenoid S1 is opened for a finite period.

5 The output to locking plate 54 is actually to a solenoid which displaces the locking plate 54 to permit actuation of a selection button 18a to f once it has been established by the sensor in compartment 28 that a glass or cup 22 is present.

10

The output to solenoid S2 is to control the solenoid S2 in Figure 2 and thereby to control the pressure relief valve V3 and the carbonated water dispensing valve V4. The solenoid S2 is actuated to allow 15 carbonation gas from the reservoirs 40a to 40d through the pressure relief valve V3 and the selection mechanisms 50 (with their selection buttons 18a to d) to the dispensing mechanisms 20a to d thereby to discharge a metered quantity of concentrate through 20 the outlet 82 of Figure 2 into the glass 22. The solenoid S2 also opens the carbonated water dispensing valve V4 to allow a volume of carbonated water to be dispensed to the glass 22 in timed relationship with the dispensing of the concentrate.

25

The output to the pump 154 actuates the water pump 154

- 80 -

in Figure 8 so that water from the water supply 150 is pumped into the carbonation chamber 110 and more particularly into the water break chamber 112. As  
5      aforementioned, the pumping of water is controlled by the meter means 180 and the sensor 160.

The next output from the control unit 510 is to a gas supply indicator lamp on panel 16 (not shown) for  
10      indicating in response to a signal from the changeover mechanism 300 that one of the gas bottles 302 or 304 requires replacing.

The next output is to the motor of the agitating means 170 of Figure 8. As above-described, the motor will  
15      be driven for a finite period according to the required duration of the carbonation cycle in the carbonation chamber 110. The duration of this period is controlled by the control unit 510 and as  
20      above-described, this may be controlled in response to the input signals of the sensors 400.

The next output is to a concentrate indicator on the panel 16 (not shown) which may indicate that a  
25      container 14 is empty. An input to the control unit 510 for this purpose could be obtained from a sensor associated with the dispensing mechanisms 20.

- 81 -

A further output signal goes to pump 136 of Figure 8 which pumps water for the cooling jacket 120. The control unit 510 will control the pumping of chilled water to the cooling jacket 120 in accordance with a predetermined program. It will be readily appreciated that sensors may be provided for the purpose of inputting signals giving temperature parameters to the control unit 510.

5  
10 The next output signal is to a solenoid controlling the supply of carbonation gas in the line 36 in Figure 2. This signal charges the head space in the carbonation chamber 114 of Figure 8 after that chamber has been filled with water.

15 The control unit 510 controls the sequence of the cycle of operation of the carbonation apparatus 10. Initially, it will be monitoring the input from the sensor in the dispensing compartment 28 to ensure that  
20 a glass 22 is present. Assuming that such a glass is present, it will output a signal to the solenoid controlling the position of the locking plate 54 (Figure 3A) whereby it is then possible for the user to actuate one of the selection buttons 18a to 18f.  
25 The actuation of a selection button 18 causes the microswitch 76 (Figure 3A) to start the carbonation

- 82 -

cycle. Assuming that the carbonation chamber 114 (Figure 8) contains water to the required level, the first step then required is to charge the head space with carbonation gas from the supply 34 (Figure 2). This is achieved by outputting a signal to a solenoid in the line 36 for gas to be supplied to the carbonation chamber. When the carbonation chamber has been charged with gas, the solenoid in line 36 is closed. Meanwhile the dispensing mechanism 20A (Figure 4A) has been vented to atmosphere so that the chamber thereof is charged with concentrate which has flowed thereto under gravity from the container 14. When the carbonation chamber has been charged with gas, the control unit initiates a carbonation cycle for the agitator means 170 by outputting a signal to the motor thereof for the required finite duration. After this period, the control unit sends a signal to solenoid S2 whereby a charge of redundant carbonation gas from the reservoirs 40a to d is allowed to pass through the pressure relief valve V3 through the selection mechanism 50 associated with the chosen selection button 18 and to the dispensing mechanism 20 whereby a metered quantity of concentrate is dispensed through the outlet 82 of Figure 2. In timed relationship thereto the valve V4 is opened so that the carbonated water flows from the carbonation



- 83 -

chamber into the glass 22. It will be seen that in this embodiment, the solenoid S2 is the means by which the dispensing of both concentrate and carbonated water is effected in timed relationship. Prior to the dispensing of the carbonated water, the control unit opens the solenoid S1 so that the redundant gas in the head space of the carbonation chamber 26 (Figure 2) is used to charge the reservoirs 40a to 40d.

#### 10 Disposable Syrup Dispenser

Modified forms of syrup dispenser, which are low-cost and disposable after use, are illustrated in figures 18 to 28. These may be employed instead of the units shown in Figs. 4 and 5.

Figs. 18 to 25 show a concentrate supply device 2' comprising a concentrate container 4', such as a liquid tight box, and a concentrate dispensing unit 6' which is secured to the container 4' and is for dispensing concentrate therefrom in metered quantities. Initially, the container 4' is filled with liquid concentrate 8' to be dispensed although each of Figs. 18 to 21 show that the container 4' has already been partly emptied.

- 84 -

The dispensing unit 6' comprises a cylindrical side wall 10' which is secured, as by welding, to a disc shaped upper wall 12' having an outwardly extending flange 14' by which the unit 6 is secured, again as by welding, to a wall 16' of the container 4'. A lower wall 18' of the unit 6' is carried by the cylindrical wall 10' and has a central circular aperture 20' through which projects a stem 22', of circular cross-section, carried by the upper wall 12'. A flexible plastics diaphragm 24' of relatively flimsy material is provided in the unit 6'. The diaphragm 24', as best seen in Fig. 23, is of bag-like construction and is of a size and shape such that, as shown in Fig. 19, it may conform to the interior of the walls 10' and 18'. The diaphragm is open at its upper end and the upper edge 26' thereof is secured between the walls 10' and 12'. The diaphragm 24' has an opening 28' at its lower end and the perimeter of the opening 28' of the diaphragm is secured as by welding to the portion of the wall 18' surrounding the aperture 20'. The diaphragm 24' accordingly divides the interior of the unit 6' into two chambers 30' and 32'. The chamber 30' communicates with the interior of vessel 4' through a passage 34' which may be closed by a one-way valve 36' and the chamber 32' may receive pressurised gas from a gas supply (not shown) through

- 85 -

a nipple 38' into which the end of a gas supply pipe 40' (corresponding to pipe 44 of Fig. 2) may be inserted. Preferably, the wall 12', flanges 16' and stem 22' are formed as a first unitary plastics moulding and the wall 10', wall 18' and nipple 38' are formed as a second unitary plastics moulding, the two mouldings being secured together with the upper edge 26' of the diaphragm 24' clamped therebetween.

5

10 The stem 22' is hollow to define a passage 42' which, at its lower end communicates with atmosphere, and its upper end may communicate with the interior of the container 4' through a passage 44' which may be closed by a one-way valve 46'.

15

A circumferential channel 48' is provided on the outside of stem 22' at a position near but spaced from the lower end. The size of the opening 20' in wall 18' is such that the wall 18' extends into the channel 48' and normally contacts the stem 20' at a point 50' therein to form a seal. Four axial channels 52' extend along the exterior of the portion of the stem 20' below the circumferential channel 50'. The wall 18' is flexibly resilient so that it may bend from the full line position shown in Fig. 19 in which a seal is formed at point 50' to the chain dotted line

20

25

- 86 -

position 54' shown in Fig. 19 in which the seal at point 50' is broken and contact is made with the stem at point 56' adjacent the upper end of the channel 52'. The resilience of the wall 18' is sufficient to permit the lower part of stem 22' to be pushed through the aperture 20' during assembly.

The valve 36' is made of a unitary moulding of synthetic plastics material and comprises a ball 60' forming a valve head, a ligament 62' extending through the passage 34' and a cross-bar 64' on the opposite side of the passage 36' to the head 60' and acting as a stop limiting the downwards movement of the head 60'. The ligament 62' is sufficiently flexible to enable it to be bent so that the cross-bar 64' extends generally parallel to the ligament to enable the ligament and cross-bar to be threaded through the aperture 34' during manufacture. The construction of the valve 46' is identical to the valve 36' and thus comprises a head 70', ligament 72' and cross-bar 74'.

The device illustrated in Figs. 18 to 25 will normally be supplied to customers with the container 4' filled with concentrate and the metering unit 6' empty. A cap 76' shown in broken lines in Fig. 18 only is

- 87 -

preferably included and is attached to the unit 6' by a breakable seal (not shown) and covers the lower end of the stem 22' and the nipple 38'. In order to use the device, the customer removes the cap 76' and  
5 inserts the device into a carbonating apparatus, not described herein in detail, which is designed for receiving the device 2'. The device 2' is inserted in the carbonating apparatus in the "inverted" position illustrated in Figs.19 to 21 and the pipe 40', which  
10 is part of the carbonation apparatus, is inserted into the nipple 38' and forms a gas tight seal therewith. At this point, the chamber 32' is not pressurised and, as a result, liquid may flow under gravity from the interior of the container 4' into the  
15 chamber 30', the valve 36' opening for this purpose as shown in Fig. 18. As liquid leaves the interior of the container 4' and enters the chamber 30', pressure within the container 4' may reduce and as a result atmospheric pressure acting on valve head 70' will  
20 cause the valve 46' to open to permit air to bubble up through the liquid in container 4' as indicated at 78' in Fig.18. Of course, if the chamber 30' is filled with air when the device is first used, the air in the chamber 30' will first be transferred through the  
25 passage 34' into the container 4' as liquid enters the

- 88 -

chamber 30', in which the case the opening of the valve 46' may be delayed.

As shown in Fig. 19, after the chamber 30' has been  
5 filed with liquid concentrate from the container 4',  
valve 46' closes. The unit 6' now contains a metered  
quantity of liquid to be dispensed. As shown in Fig.  
20, this metered quantity of liquid may be dispensed  
from the unit 6' by permitting gas pressure to enter  
10 chamber 32' through pipe 40'. The admission of such  
gas is preferably controlled by a control and timing  
system (not shown) of the carbonation apparatus (not  
shown) with which the device 2' is used, such as  
that previously described. As the pressure in chamber  
15 32' increases, the resulting tendency of the liquid  
in chamber 30' to be forced upwardly through the  
passage 34' causes the valve 36' to close (Fig. 20).  
This pressure also causes wall 18' to flex downwardly  
as shown in fig. 20 and in broken lines in Fig. 24,  
20 thus allowing liquid in the chamber 30' to be  
discharged therefrom through the opening 20' in the  
wall 18'. If the pressure in chamber 32' is  
sufficiently high, the wall 18' will be bent to the  
chain dotted line position shown in Fig. 24 and the  
25 liquid leaving the chamber 32' will pass through the  
relatively small apertures defined by the channels 52'

- 89 -

and the edge of the wall 18' around the opening 20',  
as indicated by arrows 80' in Fig. 24. If the  
pressure is somewhat lower than that necessary to  
achieve this condition, contact will not be made at  
5 point 56' between wall 18' and stem 22' and as a  
result, the outflow of liquid will not be constricted  
by the channels 52'. In this way, variations in the  
rate of outflow of liquid as a result of pressure  
variations in chamber 32' may be reduced.

10

The pressure in chamber 32' is retained long enough to  
substantially empty the chamber 30' of liquid, at  
which point, as shown in Fig. 21, the diaphragm 24'  
has reduced the volume of chamber 30' to near to zero.  
15 Thereafter, the pressure in chamber 32' may be  
released and chamber 30' will again fill with  
concentrate as shown in Figs. 18 and 20;

The embodiment shown in Figs. 27 to 28 is the same as  
20 that of Figs. 18 to 25 except that the lower wall 18A'  
of unit 6' is substantially rigid and, instead, the  
upper wall 12A' is resiliently flexible and is thus  
somewhat thinner than the wall 12'. Fig. 26 shows the  
chamber filled with liquid 30' to be dispensed and  
25 Fig. 25 shows the dispensing operation with the  
chamber 32' pressurised. As can be seen, the wall

- 90 -

12A' flexes upwardly to draw the stem 20' upwardly with respect to the aperture 20' in wall 18A', thus permitting liquid to be discharged from the chamber 30' through aperture 20'. The distance through which the stem 20' moves upwardly relative to the wall 18' depends upon the pressure in the chamber 32' so that, when the pressure is high, the liquid is constrained to flow through the restricted area defined by the edge of the wall 18A' around the aperture 20' and the channels 52' whereas lower pressures cause the stem 20' to assume intermediate position at which the area available for the outflow of liquid is greater.

Various modifications are possible within the scope of the invention. For example, although it has been assumed that the container 4' is of relatively rigid material in the illustrated embodiments, thus requiring provision for air to enter as the liquid leaves (this provision being the valve 46' in the embodiment shown in the drawings), the invention can be applied to so-called "bag-in-a-box" containers in which the liquid is contained in a collapsible bag located in a box. In this case, dispensing can be achieved without the need for air to enter the bag containing the liquid since this collapses under atmospheric pressure as liquid is withdrawn.



- 91 -

The invention provides a highly advantageous and inexpensive device for dispensing concentrate which may be made sufficiently cheaply to be disposed of after the liquid in the container with which it is used has been consumed.

Figs. 18 to 25 show a concentrate supply device 2' comprising a concentrate container 4', such as a liquid tight box, and a concentrate dispensing unit 6' which is secured to the container 4' and is for dispensing concentrate therefrom in metered quantities. Initially, the container 4' is filled with liquid concentrate 8' to be dispensed although each of Figs. 18 to 21 show that the container 4' has already been partly emptied.

The dispensing unit 6' comprises a cylindrical side wall 10' which is secured, as by welding, to a disc shaped upper wall 12' having an outwardly extending flange 14' by which the unit 6 is secured, again as by welding, to a wall 16' of the container 4'. A lower wall 18' of the unit 6' is carried by the cylindrical wall 10' and has a central circular aperture 20' through which projects a stem 22', of circular cross-section, carried by the upper wall 12'. A flexible plastics diaphragm 24' of relatively flimsy

- 92 -

material is provided in the unit 6'. The diaphragm 24', as best seen in Fig. 23, is of bag-like construction and is of a size and shape such that, as shown in Fig. 19, it may conform to the interior of the walls 10' and 18'. The diaphragm is open at its upper end and the upper edge 26' thereof is secured between the walls 10' and 12'. The diaphragm 24' has an opening 28' at its lower end and the perimeter of the opening 28' of the diaphragm is secured as by welding to the portion of the wall 18' surrounding the aperture 20'. The diaphragm 24' accordingly divides the interior of the unit 6' into two chambers 30' and 32'. The chamber 30' communicates with the interior of vessel 4' through a passage 34' which may be closed by a one-way valve 36' and the chamber 32' may receive pressurised gas from a gas supply (not shown) through a nipple 38' into which the end of a gas supply pipe 40' may be inserted. Preferably, the wall 12', flanges 16' and stem 22' are formed as a first unitary plastics moulding and the wall 10', wall 18' and nipple 38' are formed as a second unitary plastics moulding, the two mouldings being secured together with the upper edge 26' of the diaphragm 24' clamped therebetween.

The stem 22' is hollow to define a passage 42' which,

- 93 -

at its lower end communicates with atmosphere, and its upper end may communicate with the interior of the container 4' through a passage 44' which may be closed by a one-way valve 46'.

5

A circumferential channel 48' is provided on the outside of stem 22' at a position near but spaced from the lower end. The size of the opening 20' in wall 18' is such that the wall 18' extends into the channel 48' and normally contacts the stem 20' at a point 50' therein to form a seal. Four axial channels 52' extend along the exterior of the portion of the stem 20' below the circumferential channel 50'. The wall 18' is flexibly resilient so that it may bend from the full line position shown in Fig. 19 in which a seal is formed at point 50' to the chain dotted line position 54' shown in Fig. 19 in which the seal at point 50' is broken and contact is made with the stem at point 56' adjacent the upper end of the channel 52'. The resilience of the wall 18' is sufficient to permit the lower part of stem 22' to be pushed through the aperture 20' during assembly.

The valve 36' is made of a unitary moulding of synthetic plastics material and comprises a ball 60' forming a valve head, a ligament 62' extending through

- 94 -

the passage 34' and a cross-bar 64' on the opposite side of the passage 36' to the head 60' and acting as a stop limiting the downwards movement of the head 60'. The ligament 62' is sufficiently flexible to enable it to be bent so that the cross-bar 64' extends generally parallel to the ligament to enable the ligament and cross-bar to be threaded through the aperture 34' during manufacture. The construction of the valve 46' is identical to the valve 36' and thus comprises a head 70', ligament 72' and cross-bar 74'.

The device illustrated in Figs. 18 to 25 will normally be supplied to customers with the container 4' filled with concentrate and the metering unit 6' empty. A cap 76' shown in broken lines in Fig. 18 only is preferably included and is attached to the unit 6' by a breakable seal (not shown) and covers the lower end of the stem 22' and the nipple 38'. In order to use the device, the customer removes the cap 76' and inserts the device into a carbonating apparatus, not described herein in detail, which is designed for receiving the device 2'. The device 2' is inserted in the carbonating apparatus in the "inverted" position illustrated in Figs. 19 to 21 and the pipe 40', which is part of the carbonation apparatus, is inserted

- 95 -

into the nipple 38' and forms a gas tight seal therewith. At this point, the chamber 32' is not pressurised and, as a result, liquid may flow under gravity from the interior of the container 4' into the  
5 chamber 30', the valve 36' opening for this purpose as shown in Fig. 18. As liquid leaves the interior of the container 4' and enters the chamber 30', pressure within the container 4' may reduce and as a result atmospheric pressure acting on valve head 70' will  
10 cause the valve 46' to open to permit air to bubble up through the liquid in container 4' as indicated at 78' in Fig.18. Of course, if the chamber 30' is filled with air when the device is first used, the air in the chamber 30' will first be transferred through the  
15 passage 34' into the container 4' as liquid enters the chamber 30', in which the case the opening of the valve 46' may be delayed.

As shown in Fig. 19, after the chamber 30' has been  
20 filed with liquid concentrate from the container 4', valve 46' closes. The unit 6' now contains a metered quantity of liquid to be dispensed. As shown in Fig. 20, this metered quantity of liquid may be dispensed from the unit 6' by permitting gas pressure to enter  
25 chamber 32' through pipe 40'. The admission of such gas is preferably controlled by a control and timing

- 96 -

system (not shown) of the carbonation apparatus (not shown) with which the device 2' is used. Such a system is described in our co-pending UK application no. 8914420.8. As the pressure in chamber 32' increases, the resulting tendency of the liquid in chamber 30' to be forced upwardly through the passage 34' causes the valve 36' to close (Fig. 20). This pressure also causes wall 18' to flex downwardly as shown in fig. 20 and in broken lines in Fig. 24, thus allowing liquid in the chamber 30' to be discharged therefrom through the opening 20' in the wall 18'. If the pressure in chamber 32' is sufficiently high, the wall 18' will be bent to the chain dotted line position shown in Fig. 24 and the liquid leaving the chamber 32' will pass through the relatively small apertures defined by the channels 52' and the edge of the wall 18' around the opening 20', as indicated by arrows 80' in Fig. 24. If the pressure is somewhat lower than that necessary to achieve this condition, contact will not be made at point 56' between wall 18' and stem 22' and as a result, the outflow of liquid will not be constricted by the channels 52'. In this way, variations in the rate of outflow of liquid as a result of pressure variations in chamber 32' may be reduced.

- 97 -

The pressure in chamber 32' is retained long enough to substantially empty the chamber 30' of liquid, at which point, as shown in Fig. 21, the diaphragm 24' has reduced the volume of chamber 30' to near to zero. Thereafter, the pressure in chamber 32' may be released and chamber 30' will again fill with concentrate as shown in Figs. 18 and 20;

The embodiment shown in Figs. 27 to 28 is the same as that of Figs. 18 to 25 except that the lower wall 18A' of unit 6' is substantially rigid and, instead, the upper wall 12A' is resiliently flexible and is thus somewhat thinner than the wall 12'. Fig. 26 shows the chamber filled with liquid 30' to be dispensed and Fig. 25 shows the dispensing operation with the chamber 32' pressurised. As can be seen, the wall 12A' flexes upwardly to draw the stem 20' upwardly with respect to the aperture 20' in wall 18A', thus permitting liquid to be discharged from the chamber 30' through aperture 20'. The distance through which the stem 20' moves upwardly relative to the wall 18' depends upon the pressure in the chamber 32' so that, when the pressure is high, the liquid is constrained to flow through the restricted area defined by the edge of the wall 18A' around the aperture 20' and the channels 52' whereas lower pressures cause the stem

- 98 -

20' to assume intermediate position at which the area available for the outflow of liquid is greater.

5 Various modifications are possible within the scope of the invention. For example, although it has been assumed that the container 4' is of relatively rigid material in the illustrated embodiments, thus requiring provision for air to enter as the liquid leaves (this provision being the valve 46' in the  
10 embodiment shown in the drawings), the invention can be applied to so-called "bag-in-a-box" containers in which the liquid is contained in a collapsible bag located in a box. In this case, dispensing can be achieved without the need for air to enter the bag  
15 containing the liquid since this collapses under atmospheric pressure as liquid is withdrawn.

The invention provides a highly advantageous and inexpensive device for dispensing concentrate which  
20 may be made sufficiently cheaply to be disposed of after the liquid in the container with which it is used has been consumed.

Figs. 18 to 25 show a concentrate supply device 2' comprising a concentrate container 4', such as a  
25 liquid tight box, and a concentrate dispensing unit 6'



- 99 -

which is secured to the container 4' and is for dispensing concentrate therefrom in metered quantities. Initially, the container 4' is filled with liquid concentrate 8' to be dispensed although each of Figs. 18 to 21 show that the container 4' has already been partly emptied.

The dispensing unit 6' comprises a cylindrical side wall 10' which is secured, as by welding, to a disc shaped upper wall 12' having an outwardly extending flange 14' by which the unit 6 is secured, again as by welding, to a wall 16' of the container 4'. A lower wall 18' of the unit 6' is carried by the cylindrical wall 10' and has a central circular aperture 20' through which projects a stem 22', of circular cross-section, carried by the upper wall 12'. A flexible plastics diaphragm 24' of relatively flimsy material is provided in the unit 6'. The diaphragm 24', as best seen in Fig. 23, is of bag-like construction and is of a size and shape such that, as shown in Fig. 19, it may conform to the interior of the walls 10' and 18'. The diaphragm is open at its upper end and the upper edge 26' thereof is secured between the walls 10' and 12'. The diaphragm 24' has an opening 28' at its lower end and the perimeter of the opening 28' of the diaphragm is secured as by

- 100 -

welding to the portion of the wall 18' surrounding the aperture 20'. The diaphragm 24' accordingly divides the interior of the unit 6' into two chambers 30' and 32'. The chamber 30' communicates with the interior of vessel 4' through a passage 34' which may be closed by a one-way valve 36' and the chamber 32' may receive pressurised gas from a gas supply (not shown) through a nipple 38' into which the end of a gas supply pipe 40' may be inserted. Preferably, the wall 12', flanges 16' and stem 22' are formed as a first unitary plastics moulding and the wall 10', wall 18' and nipple 38' are formed as a second unitary plastics moulding, the two mouldings being secured together with the upper edge 26' of the diaphragm 24' clamped therebetween.

The stem 22' is hollow to define a passage 42' which, at its lower end communicates with atmosphere, and its upper end may communicate with the interior of the container 4' through a passage 44' which may be closed by a one-way valve 46'.

A circumferential channel 48' is provided on the outside of stem 22' at a position near but spaced from the lower end. The size of the opening 20' in wall 18' is such that the wall 18' extends into the channel

- 101 -

48' and normally contacts the stem 20' at a point 50' therein to form a seal. Four axial channels 52' extend along the exterior of the portion of the stem 20' below the circumferential channel 50'. The wall 18' is flexibly resilient so that it may bend from the full line position shown in Fig. 19 in which a seal is formed at point 50' to the chain dotted line position 54' shown in Fig. 19 in which the seal at point 50' is broken and contact is made with the stem at point 56' adjacent the upper end of the channel 52'. The resilience of the wall 18' is sufficient to permit the lower part of stem 22' to be pushed through the aperture 20' during assembly.

The valve 36' is made of a unitary moulding of synthetic plastics material and comprises a ball 60' forming a valve head, a ligament 62' extending through the passage 34' and a cross-bar 64' on the opposite side of the passage 36' to the head 60' and acting as a stop limiting the downwards movement of the head 60'. The ligament 62' is sufficiently flexible to enable it to be bent so that the cross-bar 64' extends generally parallel to the ligament to enable the ligament and cross-bar to be threaded through the aperture 34' during manufacture. The construction of the valve 46' is identical to the valve 36' and thus

- 102 -

comprises a head 70', ligament 72' and cross-bar 74'.

5 The device illustrated in Figs. 18 to 25 will normally be supplied to customers with the container 4' filled with concentrate and the metering unit 6' empty. A cap 76' shown in broken lines in Fig. 18 only is preferably included and is attached to the unit 6' by a breakable seal (not shown) and covers the lower end  
10 of the stem 22' and the nipple 38'. In order to use the device, the customer removes the cap 76' and inserts the device into a carbonating apparatus, not described herein in detail, which is designed for receiving the device 2'. The device 2' is inserted in  
15 the carbonating apparatus in the "inverted" position illustrated in Figs. 19 to 21 and the pipe 40', which is part of the carbonation apparatus, is inserted into the nipple 38' and forms a gas tight seal therewith. At this point, the chamber 32' is not  
20 pressurised and, as a result, liquid may flow under gravity from the interior of the container 4' into the chamber 30', the valve 36' opening for this purpose as shown in Fig. 18. As liquid leaves the interior of the container 4' and enters the chamber 30', pressure  
25 within the container 4' may reduce and as a result atmospheric pressure acting on valve head 70' will

- 103 -

cause the valve 46' to open to permit air to bubble up through the liquid in container 4' as indicated at 78' in Fig.18. Of course, if the chamber 30' is filled with air when the device is first used, the air in the chamber 30' will first be transferred through the passage 34' into the container 4' as liquid enters the chamber 30', in which the case the opening of the valve 46' may be delayed.

As shown in Fig. 19, after the chamber 30' has been filed with liquid concentrate from the container 4', valve 46' closes. The unit 6' now contains a metered quantity of liquid to be dispensed. As shown in Fig. 20, this metered quantity of liquid may be dispensed from the unit 6' by permitting gas pressure to enter chamber 32' through pipe 40'. The admission of such gas is preferably controlled by a control and timing system (not shown) of the carbonation apparatus (not shown) with which the device 2' is used, such as that previously described.

As the pressure in chamber 32' increases, the resulting tendency of the liquid in chamber 30' to be forced upwardly through the passage 34' causes the valve 36' to close (Fig. 20). This pressure also causes wall 18' to flex downwardly as shown in fig. 20 and in broken lines in Fig. 24, thus

- 104 -

allowing liquid in the chamber 30' to be discharged therefrom through the opening 20' in the wall 18'. If the pressure in chamber 32' is sufficiently high, the wall 18' will be bent to the chain dotted line position shown in Fig. 24 and the liquid leaving the chamber 32' will pass through the relatively small apertures defined by the channels 52' and the edge of the wall 18' around the opening 20', as indicated by arrows 80' in Fig. 24. If the pressure is somewhat lower than that necessary to achieve this condition, contact will not be made at point 56' between wall 18' and stem 22' and as a result, the outflow of liquid will not be constricted by the channels 52'. In this way, variations in the rate of outflow of liquid as a result of pressure variations in chamber 32' may be reduced.

The pressure in chamber 32' is retained long enough to substantially empty the chamber 30' of liquid, at which point, as shown in Fig. 21, the diaphragm 24' has reduced the volume of chamber 30' to near to zero. Thereafter, the pressure in chamber 32' may be released and chamber 30' will again fill with concentrate as shown in Figs. 18 and 20;

The embodiment shown in Figs. 27 to 28 is the same as

- 105 -

that of Figs. 18 to 25 except that the lower wall 18A' of unit 6' is substantially rigid and, instead, the upper wall 12A' is resiliently flexible and is thus somewhat thinner than the wall 12'. Fig. 26 shows the chamber filled with liquid 30' to be dispensed and Fig. 25 shows the dispensing operation with the chamber 32' pressurised. As can be seen, the wall 12A' flexes upwardly to draw the stem 20' upwardly with respect to the aperture 20' in wall 18A', thus permitting liquid to be discharged from the chamber 30' through aperture 20'. The distance through which the stem 20' moves upwardly relative to the wall 18' depends upon the pressure in the chamber 32' so that, when the pressure is high, the liquid is constrained to flow through the restricted area defined by the edge of the wall 18A' around the aperture 20' and the channels 52' whereas lower pressures cause the stem 20' to assume intermediate position at which the area available for the outflow of liquid is greater.

20

Various modifications are possible within the scope of the invention. For example, although it has been assumed that the container 4' is of relatively rigid material in the illustrated embodiments, thus requiring provision for air to enter as the liquid leaves (this provision being the valve 46' in the

25

- 106 -

embodiment shown in the drawings), the invention can be applied to so-called "bag-in-a-box" containers in which the liquid is contained in a collapsible bag located in a box. In this case, dispensing can be  
5 achieved without the need for air to enter the bag containing the liquid since this collapses under atmospheric pressure as liquid is withdrawn.

The invention provides a highly advantageous and  
10 inexpensive device for dispensing concentrate which may be made sufficiently cheaply to be disposed of after the liquid in the container with which it is used has been consumed.



- 107 -

## CLAIMS:

1. Carbonation apparatus for dispensing carbonated drinks comprising a carbonation chamber, gas supply means for supplying gas, at least one dispensing means for dispensing a metered quantity of concentrate for flavouring carbonated water dispensed from said carbonation chamber to provide a drink, said dispensing means being charged with concentrate by free flow, and means employing carbonation gas to actuate said one dispensing means to dispense said metered quantity of concentrate.
2. Apparatus as claimed in claim 1, further comprising reservoir means for storing carbonation gas from a head space of the carbonation chamber after water carbonation, and valve means controlling the flow of carbonation gas from said head space to said reservoir means.
3. Apparatus as claimed in claim 2, further comprising an exhaust valve mechanism operable after said reservoir means has been charged to divert the flow of said carbonation gas leaving said head space.

- 108 -

4. Apparatus as claimed in claim 3, wherein said exhaust valve mechanism comprises inlet passage means communicating with said head space and downstream of said controlling valve means, first outlet passage means for directing said flow of carbonation gas to said reservoir means and second outlet passage means for discharging said flow of said carbonation gas, said exhaust valve mechanism being operable to divert said flow of carbonation gas from said first outlet passage means to said second outlet passage means in response to said reservoir means being charged with carbonation gas.

5. Apparatus as claimed in claim 4, wherein said second outlet passage means passes said carbonation gas to atmosphere.

6. Apparatus as claimed in either claim 4 or claim 5, wherein said exhaust valve mechanism comprises an exhaust valve member displaceable by the pressure of the carbonation gas thereby initially to direct said carbonation gas to said reservoir means, said displacement of said exhaust valve member being maintained until a pressure differential across said valve member is reduced such that the valve member

- 109 -

returns to a position in which said carbonation gas is directed to said second outlet passage means.

5 7. Apparatus as claimed in claim 6, wherein said exhaust valve mechanism comprises a housing in which said valve member is displaceable by a pressure differential created by said carbonation gas between a first position in which it closes an inlet aperture communicating with said inlet passage means and a  
10 second position in which it closes said second outlet passage means to permit said carbonation gas to flow to said reservoir means.

15 8. Apparatus as claimed in claim 7, wherein said housing has a second inlet aperture communicating between a chamber thereof and said inlet passage means which establishes a said pressure differential when the carbonation gas is supplied.

20 9. Apparatus as claimed in either claim 7 or claim 8, wherein said valve member is mechanically biased to occupy said first position.

25 10. Apparatus as claimed in claim 9, wherein said mechanical bias is provided by spring means acting between a collar on said valve member and a portion of

- 110 -

said housing, said portion defining an opening of said second outlet passage means.

5 11. Carbonation apparatus for dispensing carbonated drinks arranged, constructed and adapted to operate substantially as hereinbefore described with reference to Figure 2 and including an exhaust valve mechanism substantially as hereinbefore described with reference to Figures 6A and 6B.

10

12. Apparatus as claimed in any one of claims 1 to 11, wherein the dispensing mechanism comprises a chamber for receiving concentrate by free flow through an opening thereto, an inlet valve mechanism for carbonation gas for actuating said dispensing mechanism to dispense said quantity of concentrate, and an outlet mechanism to permit said quantity of concentrate to be dispensed in response to pressure exerted by said carbonation gas.

15 20

13. Apparatus as claimed in claim 12, wherein said opening is defined by passage means for communicating with a container for concentrate and valve means controlling the flow of concentrate through said passage means, said valve means being operable to close said passage means when said chamber has

25

- 111 -

received a measured quantity of concentrate thereby to ensure, in use, that carbonation gas is prevented from entering said concentrate container.

5        14. Apparatus as claimed in claim 13, wherein said valve means comprises a cage means associated with said concentrate passage means, and ball means displaceable therein.

10       15. Apparatus as claimed in any one of claims 12 to 14, wherein the inlet valve mechanism includes valve means to prevent concentrate leaving said concentrated chamber via an inlet for the carbonation gas.

15       16. Apparatus as claimed in any one of claims 12 to 15, wherein said outlet mechanism comprises an outlet chamber for passing said concentrate to a dispensing outlet under the control of a pressure actuated valve member displaceable by said concentrate when said  
20       concentrate is discharged by actuation of the dispensing mechanism.

25       17. Apparatus as claimed in any one of claims 12 to 16, further comprising diaphragm means in said concentrate chamber, said carbonation gas acting on

- 112 -

said diaphragm means to expel said quantity of concentrate.

5 18. Apparatus as claimed in claim 17, wherein said diaphragm means is arranged to prevent communication of carbonation gas through said outlet mechanism.

10 19. Apparatus as claimed in either claim 16 or claim 17, wherein the configuration of said diaphragm means in a condition thereof in which the concentrate has been expelled is determined by a depending member depending from said opening for the supply of concentrate, said depending member thereby determining the quantity of concentrate dispensed.

15 20. Apparatus as claimed in claim 19, comprising a plurality of said dispensing mechanisms each for a particular concentrate, wherein the dimensions of the depending members are selected in accordance with the  
20 ratio of concentrate to carbonated water to be dispensed, thereby providing the facility to vary said ratio according to the flavour of drink to be dispensed by any particular dispensing mechanism as determined by the concentrate which, in use, is to  
25 communicate with said passage means.

- 113 -

21. Apparatus as claimed in any one of claims 12 to 20, wherein said inlet valve mechanism includes inlet passageway means adapted for push-fit connection with a charge line for carbonation gas.

5

22. Apparatus as claimed in claim 21, wherein said passageway means has a blind bore at the end having said push-fit connection, radially extending passage means for communicating gas to said passageway means from said charge line, and sealing means on each side of said radially extending passage means, said sealing means thereby avoiding a tendency for the pressure of said carbonation gas to displace said inlet passageway means out of its push-fit connection with said charge line.

10

15

23. Apparatus as claimed in any one of claims 17 to 22, wherein said diaphragm means is so arranged that in a position thereof in which the concentrate chamber is charged, said diaphragm overlies an inlet opening to said concentrate chamber from the inlet mechanism for said carbonation gas.

20

24. Apparatus as claimed in any one of claims 17 to 23, wherein said diaphragm means is so arranged that in a position thereof in which the concentrate chamber

25

- 114 -

is discharged, said diaphragm overlies an outlet opening to the outlet mechanism from the concentrate chamber.

5        25. Apparatus as claimed in claim 24 when dependent from claim 19, wherein said outlet opening is so arranged relative to said depending member that said diaphragm only overlies said outlet opening after substantially all the concentrate has been  
10        discharged.

26. Apparatus as claimed in any one of claims 1 to 25, further comprising relief valve means between the or each said dispensing means and said carbonation gas  
15        employing means for enabling carbonation gas to be exhausted to atmosphere or directed to said dispensing means in dependence on the position of a valve member thereof.

20        27. Apparatus as claimed in claim 26, wherein said dispensing means is operable to be exhausted to atmosphere via said relief valve means prior to the charging thereof with said quantity of concentrate.



- 115 -

28. Apparatus as claimed in any one of claims 1 to 27, wherein the flow of carbonation gas to said concentrate dispensing means is controlled by a concentrate selection mechanism for selecting the concentrate of that dispensing mechanism.

5

29. Apparatus as claimed in claim 28, wherein said selection mechanism controls the flow of carbonation gas from said carbonation gas employing means to said dispensing means.

10

30. Apparatus as claimed in claim 29, wherein said selection mechanism is operable to allow carbonation gas from said dispensing means to be exhausted to atmosphere thereby to permit recharging of said dispensing mechanism with concentrate.

15

31. Apparatus as claimed in claim 30, wherein said selection mechanism is itself provided with a vent to atmosphere for said carbonation gas.

20

32. Apparatus as claimed in claim 30 when dependent from any one of claims 26 to 27, wherein said selection mechanism communicates the carbonation gas to be exhausted to said relief valve means.

25

- 116 -

33. Apparatus as claimed in any one of claims 28 to 32, wherein said selection mechanism includes means for actuating said carbonation chamber to dispense water from said carbonation chamber.

5

34. Apparatus as claimed in claim 28, wherein said actuating means comprises switch means for energising valve means associated with the carbonation chamber.

10

35. Apparatus as claimed in any one of claims 28 to 34, wherein said selection mechanism is operable to cause the carbonation chamber to commence dispensing carbonated water and the or each selected dispensing means to commence dispensing concentrate in timed relationship.

15

36. Apparatus as claimed in any one of claims 28 to 35, wherein said selection mechanism comprises a manually actuable member which displaces first means in a first chamber communicating with a first charge line for carbonation gas from a source thereof, and second means in a second chamber communicating with a second charge line for carbonation gas to said dispensing means, said first means being operable to displace said second means thereby enabling

20

,25

- 117 -

communication between said first to said second charge lines.

5 37. Apparatus as claimed in claim 36, wherein said first means includes first cam means and said second means is displaced by said cam means on forward displacement of said manually actuatable member, said first means further comprising means for holding said second means in a displaced position when said  
10 manually actuatable means is forwardly displaced.

38. Apparatus as claimed in claim 37, wherein said second means actuates switch means associated with a control circuit for initiating a cycle of operations  
15 for the dispensing of a carbonated drink.

39. Apparatus as claimed in claim 38, wherein said second means is valve means in said second chamber, said valve means comprising a depending spigot for  
20 engagement with said first means, an upstanding member for actuating said switch means, and a valve member for controlling communication of carbonation gas between said first and second chambers of the selection means.

25

40. Apparatus as claimed in claim 39, wherein said

- 118 -

first means comprises a displaceable cylinder defining said cam means and said holding means, and a piston member displaceable relative thereto controlling a cylinder passage through said displaceable cylinder whereby said first chamber may be vented through said cylinder passage.

41. Apparatus as claimed in any one of claims 36 to 40, wherein said selection mechanism is adapted to operate such that upon initial actuation thereof with said manually actuatable member displaced the chambers of said selection mechanism are vented.

42. Apparatus as claimed in any one of claims 36 to 41, wherein said selection mechanism is adapted to operate such that following said initial actuation a flow of carbonation gas passes through said first and second chambers thereof and the pressure of said carbonation gas returns said manually actuatable member to its initial position.

43. Carbonation apparatus for dispensing carbonated drinks comprising a carbonation chamber for the carbonation of water with carbonation gas, water supply means for filling said carbonation chamber with water, a passage of said water from said water supply

- 119 -

means to said carbonation chamber requiring the water to pass through a space into which the water supply is discharged and from which space the water may then flow to said carbonation chamber whereby reverse flow of carbonated water back into the water supply means is prevented.

44. Apparatus as claimed in claim 43, wherein said space is defined by a water-break chamber having an inlet from said water supply means and passage means communicating with said carbonation chamber controlled by valve means.

45. Apparatus as claimed in claim 44, wherein said valve means comprises a ball and cage arrangement operable to close said passage means when the water level has reached a predetermined level, the flow of water depressing said ball which floats.

46. Apparatus as claimed in any one of claims 43 to 45, further including metering means for terminating the flow of water into said space when the water in said carbonation chamber reaches a or the predetermined level.

47. Apparatus as claimed in claim 46, wherein said

- 120 -

metering means is associated with switch means operable in response to said water in said carbonation chamber reaching said predetermined level to terminate the supply of water to said space.

5

48. Apparatus as claimed in claim 46, wherein said metering means includes float valve means which closes when said water in said carbonation chamber reaches said predetermined level.

10

49. Apparatus as claimed in claim 47, wherein said metering means includes float valve means which actuates said switch means when said water in said carbonation chamber reaches said predetermined level.

15

50. Apparatus as claimed in any one of claims 43 to 49, wherein said water supply means includes connection means for connection to a normally continuous water supply, and comprising valve means to control a water supply line from said connection means to said space.

20

51. Apparatus as claimed in any one of claims 43 to 50, wherein water supplied by said water supply means is arranged to pass the water through refrigeration

25

- 121 -

means whereby the water supplied to said space is pre-cooled.

5 52. Apparatus as claimed in any one of claims 43 to 51, wherein said space is vented to atmosphere by normally open vent means.

10 53. Apparatus as claimed in any one of claims 43 to 51, wherein said space is vented to atmosphere by vent means communicating with atmosphere.

15 54. Apparatus as claimed in any one of claims 43 to 53, wherein said water supply means includes regulating means for regulating the pressure of the water supplied to said space.

20 55. Apparatus as claimed in claim 54, wherein said water pressure regulating means comprises a housing defining a water chamber, an inlet and an outlet from and to said chamber respectively, a regulator member displaceable between said water inlet and said water outlet in response to said water pressure thereby to adjust the flow of water in accordance with the pressure of the water entering said inlet.

25

56. Apparatus as claimed in claim 55, wherein said

- 122 -

regulator member is displaceably arranged in an inlet passageway communicating with said water inlet and provided with a passage therethrough for water.

5        57. Apparatus as claimed in claim 56, wherein said  
passage comprises an axially extending passage through  
said regulator member from the end thereof disposed  
nearest to the water inlet and terminating before the  
end thereof disposed nearest to the outlet, and said  
10       passage further comprises a radially extending  
passage opening to said water chamber.

58. Apparatus as claimed in either of claims 55 or  
56, wherein said regulator member is mechanically  
15       biased in a direction away from said water outlet.

59. Apparatus as claimed in claim 58, wherein said  
regulator member is biased by spring means acting  
between said regulator member and said housing.  
20

60. Apparatus as claimed in claim 59, wherein said  
regulator member is biased by spring means in a  
direction away from said water outlet, one end of said  
regulator member being adapted to receive one end of  
25       said spring means.



- 123 -

61. A changeover mechanism for changing gas supplies for use with a gas supply arrangement comprising:-

5 a first coupling means having a first gas flow control means associated therewith and adapted for connection to a first gas supply;

10 a first actuating member operable to permit gas flow through said first gas flow control means; and

a second coupling means having a second gas flow control means associated therewith and adapted for connection to a second gas supply;

15 a second gas actuating member operable to permit gas flow through said second gas flow control means;

wherein said changeover mechanism comprises:-

20 changeover means adapted to operate in one or other of two conditions thereof whereby in one of said conditions said changeover means repeatedly actuates one of said first and second gas actuating members and whereby in the other of said conditions said  
25 changeover means repeatedly actuates the other of said first and second gas actuating members;

- 124 -

said changeover means being adapted to switch from one to the other of said conditions following detection that the gas supply associated with the actuating member last actuated has reached low pressure.

5

62. A changeover mechanism as claimed in claim 61, wherein said changeover means comprises a transfer member carrying a toggle member, the transfer member being displaceable to cause the toggle member to actuate one of said actuating members, the orientation of the toggle member at a rest position of the transfer member determining the current operating condition of the changeover means, and means for changing the orientation of the toggle member in response to said detection that the gas supply associated with the actuating means last actuated has reached low pressure.

10

15

20

25

63. A changeover mechanism as claimed in claim 62, wherein on each actuation of the gas supply said transfer member executes a first movement in one direction thereby causing a said actuating member to be displaced in the sense required to permit its respective gas control means to open and a second movement in an opposite direction thereby causing the said actuating member to be displaced in the sense

- 125 -

required to permit its respective gas control means to close, each change in orientation of the toggle member occurring during said second movement in response to a change of status of said changing means.

5

64. A changeover mechanism as claimed in claim 63, wherein at the completion of the second movement of the transfer member the toggle member returns to the orientation which it occupied at the commencement of  
10 the first movement of the toggle member when said changing means is inoperative.

65. A changeover mechanism as claimed in claim 64, wherein said toggle member co-operates with guide  
15 means during said first movement of said transfer member, said guide means defining two distinct guide paths, each said guide path being associated with a respective one of said two conditions of the changeover means.

20

66. A changeover mechanism as claimed in any one of claims 62 to 65, comprising a pair of toggle means each associated with a respective one of said two conditions of the changeover means, said toggle member  
25 encountering a said toggle means on a said first movement of the transfer member thereby causing said

- 126 -

toggle member to initiate a change in orientation thereof, said changeover means comprising displaceable means whose movement is controlled in dependence upon said aforesaid detection whereby in the absence of  
5 said detection and before substantial displacement of the transfer member in said second movement, said displaceable means is so positioned that the toggle member is returned to its orientation at the commencement of said first movement whereas upon said  
10 detection said displaceable means is rendered inoperative and the change of orientation of the toggle member initiated by said toggle means results in said toggle member having changed its orientation at the completion of said second movement of the  
15 transfer member.

67. A changeover mechanism as claimed in claim 66, further comprising a biasing member actuatable between a first state in which it biases said toggle member  
20 towards one said guide path and a second state in which it biases said toggle member towards said other guide path.

68. A changeover mechanism as claimed in claim 67, wherein contact of the toggle member with said toggle  
25 means causes said biasing member to change state and

- 127 -

contact of said toggle member with said displaceable means causes said biasing member to return to its original state.

5        69. A changeover mechanism as claimed in any one of  
claims 62 to 67, wherein the changeover means further  
comprises actuator means to determine the position of  
said displaceable means, said actuator means being  
responsive to a pressure signal indicating sufficient  
10       gas pressure in the last actuated gas supply to  
position said displaceable means to return said toggle  
member to its orientation at the commencement of the  
last executed first movement of the transfer member  
whereas said actuator means is inoperable in the  
15       absence of such a pressure signal such that the  
displaceable means is inoperative as aforesaid.

20       70. A changeover mechanism as claimed in claim 69,  
wherein said displaceable means comprises a pair of  
actuator pins, one of said pins associated with each  
said condition of the changeover means, a toggle  
mechanism to reciprocate the actuator pins, actuator  
means to reciprocate the toggle mechanism, said  
actuator means being responsive to a pressure signal  
25       from a shuttle valve, the position of the shuttle  
valve being dependent on which of said gas supplies is

- 128 -

in use and switching in response to a low condition occurring in the last actuated gas supply.

5 71. Carbonation apparatus for drinks comprising a carbonation chamber for dispensing carbonated water and agitating means for carbonating, means for determining the carbonation period during which the agitating means is operational in a single carbonation cycle, concentrate being mixed with the carbonated  
10 water in the dispensed drink, means for varying the carbonation period in dependence upon an identification of the concentrate to be dispensed.

15 72. Apparatus as claimed in claim 71, comprising a compartment for a concentrate container, said compartment having sensing means for identifying the concentrate in said compartment in accordance with an indication means associated with a said container (when present), said sensing means providing said  
20 identification.

25 73. Apparatus as claimed in claim 72, wherein the sensing means is located in a specific position so as to receive a signal from a container only if that container requires the carbonation period associated with that sensing means.

- 129 -

74. Apparatus as claimed in claim 73, wherein a plurality of sensing means are arranged in said compartment, each sensing means being positioned to receive a respective signal, whereby different levels of carbonation are assigned to the different sensing means.

75. Apparatus as claimed in claim 72, wherein the sensing means is capable of outputting a plurality of signals, each signal being assigned to a different carbonation period.

76. Carbonation apparatus for dispensing flavoured drinks comprising a carbonation chamber surrounded by a cooling jacket for the passage therethrough of a cooling medium, a compartment juxtaposed said cooling jacket for a container of concentrate, wherein both cooling of the carbonation chamber and cooling of the concentrate container is achieved by thermal transfer to said cooling medium.

77. Apparatus as claimed in claim 76, wherein said compartment is adapted to locate a concentrate container in juxtaposed relationship with said cooling jacket.

- 130 -

5 78. Carbonation dispensing apparatus comprising means for supplying concentrate from a supply thereof to a metering chamber in a first step so that the chamber contains a metered quantity of said concentrate; and means for applying gas pressure to said chamber in a second step to discharge said metered quantity of concentrate therefrom.

10 79. Apparatus according to claim 78, wherein said supply of concentrate is mounted such that concentrate is transferred therefrom to said metering chamber in said first step under gravity.

15 80. Apparatus according to claim 79, including a non-return valve positioned between said metering chamber and said supply so as to permit concentrate to move from the supply to the metering chamber but to inhibit return of concentrate from the metering chamber to the supply when gas pressure is applied to  
20 the metering chamber; and a discharge valve which is biased to a closed position but opens in response to application of said pressure to said metering chamber.



- 131 -

81. Apparatus for producing drinks comprising water supply means, a container for receiving water from said supply means and valve means through which said supply means supplies water to said container, said  
5 supply means comprising an element arranged to discharge water at a position spaced from said valve means so as to provide a water break, said valve means being arranged to be held open by the action of water discharged from said element whilst said chamber  
10 is being filled with said water.

82. Apparatus for producing carbonated flavoured drinks comprising means for carbonating water, means for supplying concentrate to said water from a  
15 container of concentrate, and control means responsive to an identifying means indicative of the type of concentrate in said container to adjust the degree to which said water is carbonated in dependence upon the type of concentrate supplied.

20 83. Apparatus for producing carbonated flavoured drinks comprising a carbonation chamber, means for carbonating water in said chamber, concentrate supply means for supplying concentrate for flavouring the  
25 carbonated water and a coolant container arranged so that coolant therein receives heat both from said

- 132 -

carbonation chamber and from said concentrate supply means.

5 84. Apparatus for supply gas from first and second  
pressurised containers thereof, comprising an actuator  
moveable in an actuation cycle to cause gas to be  
supplied from one of said containers; a change-over  
10 element associated with said actuator and moveable  
between a first position in which said change-over  
element is inoperative and a second position in which  
said change-over element causes said actuator to  
change, during a said actuation cycle, between a first  
condition and second condition, which conditions  
15 determine the container from which gas will be  
supplied in the next actuation cycle, and means for  
moving said element from one of said positions to the  
other dependent upon the gas pressure in the container  
from which gas is supplied in a given said cycle.

20 85. A device for discharging liquid comprising a  
housing defining a metering chamber for receiving the  
liquid, at least a portion of said housing being  
distortable by gas pressure for discharging liquid  
from the housing, and means for applying gas pressure  
25 to the housing to effect said distortion.

- 133 -

86. A device according to claim 85, in combination with a container of liquid, said device being attached to said container for discharging metered quantities of the liquid therein.

5

87. A concentrate container for containing flavoured concentrate for a carbonated drink, metering device mounted on said container and adapted for discharging concentrate therefrom in metered quantities, first  
10 valve means between the metering chamber and the concentrate container for permitting concentrate to flow from the container into the metering chamber under gravity when the container is orientated with the metering chamber below the container, and a second  
15 valve means arranged to open when the first valve means is open to permit air to enter the container and rise through the concentrate therein as concentrate leaves the container and enters the metering chamber.

20

88. A valve comprising a valve seat defining a passage through which fluid may flow, a valve head engageable with said seat to close the passage and movable away from the seat to open the passage, a  
25 ligament connected to the valve head and extending through the passage, and a transversely extending stop

- 134 -


element attached to the ligament at the opposite side of the passage to the valve head for engaging an abutment surface to limit the distance through which the valve head may move away from the valve seat.

5 Preferably, the valve head, ligament and stop member are integrally moulded from synthetic plastics material.

89. A concentrate dispensing device for dispensing  
10 concentrate in response to application of gas pressure thereto, the device comprising outlet means which provides a relatively large outlet when the applied gas pressure is relatively small and a relatively smaller outlet when the gas pressure is relatively  
15 large.


1/24

FIG. 1

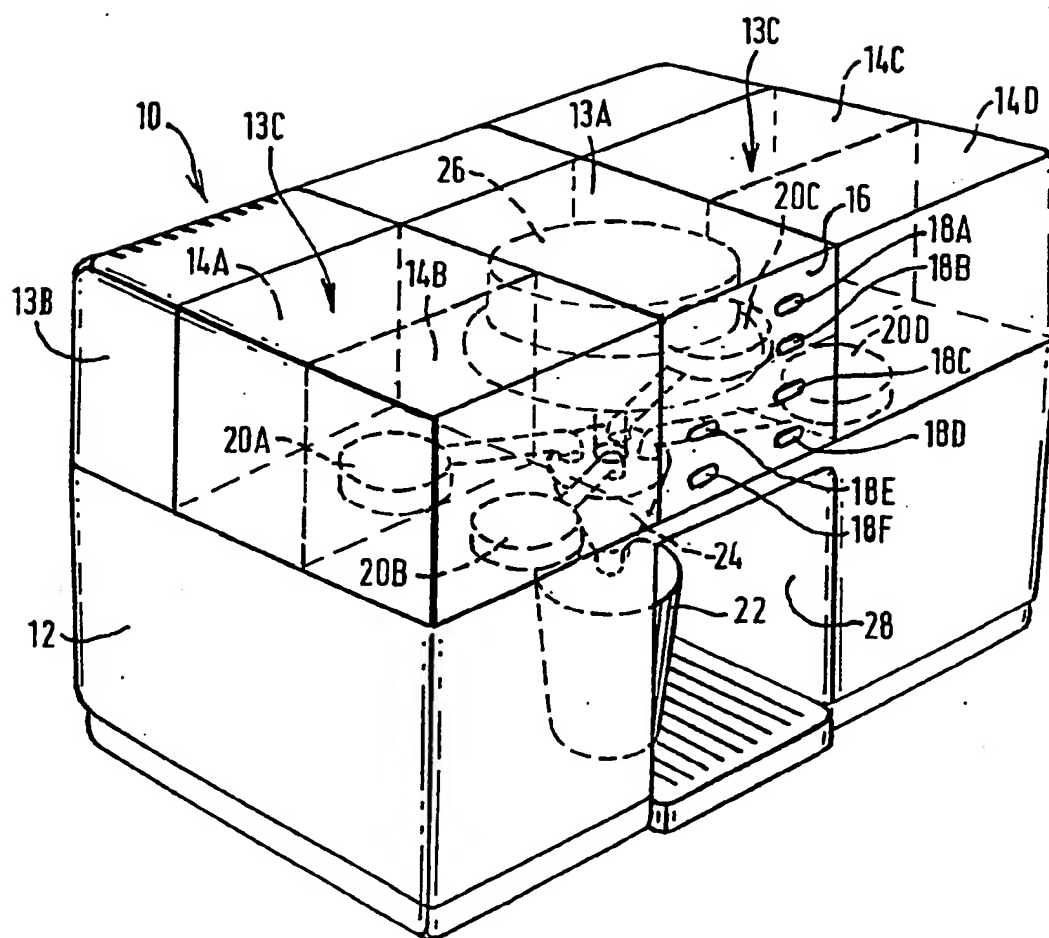


2/24

FIG. 2

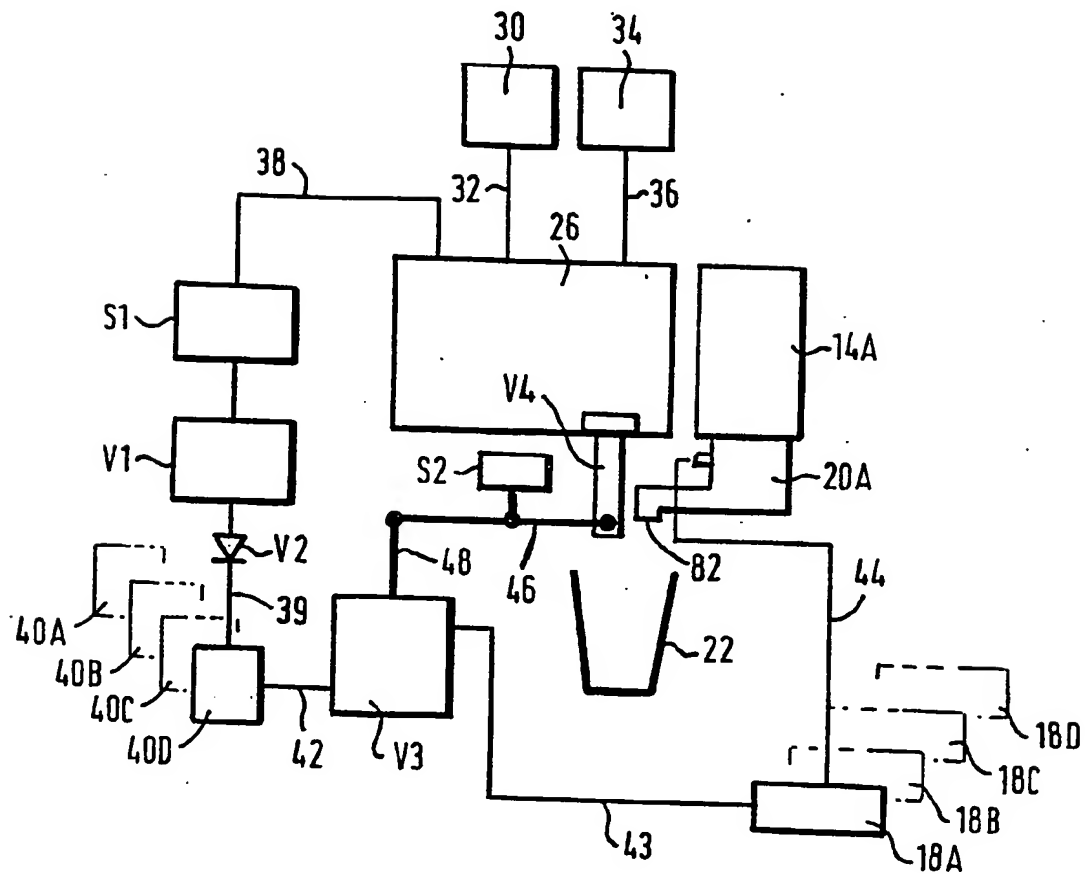

3/24

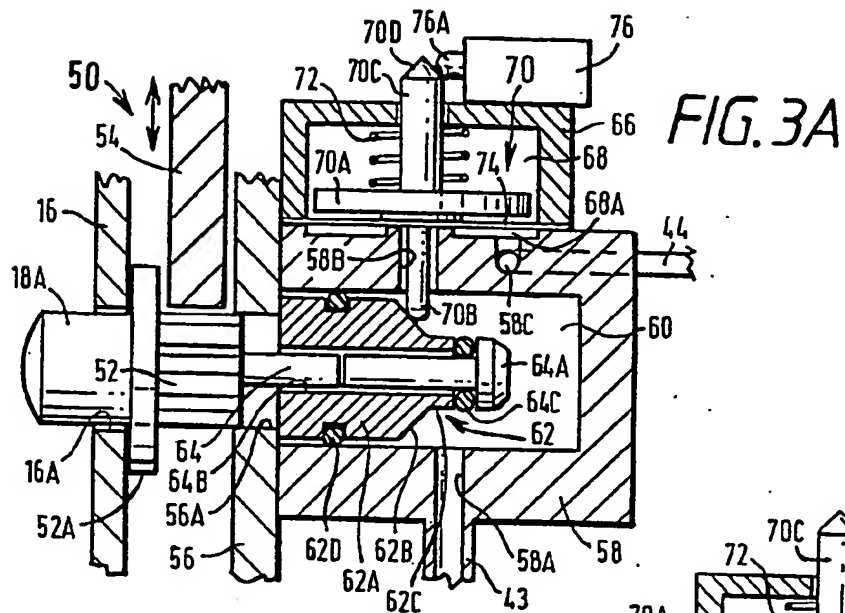

4/2a

FIG. 4A





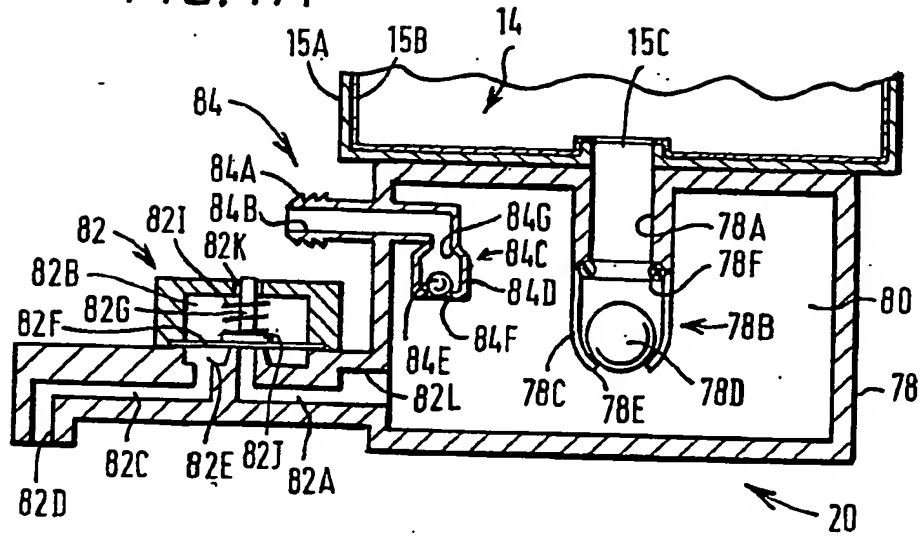


FIG. 4B

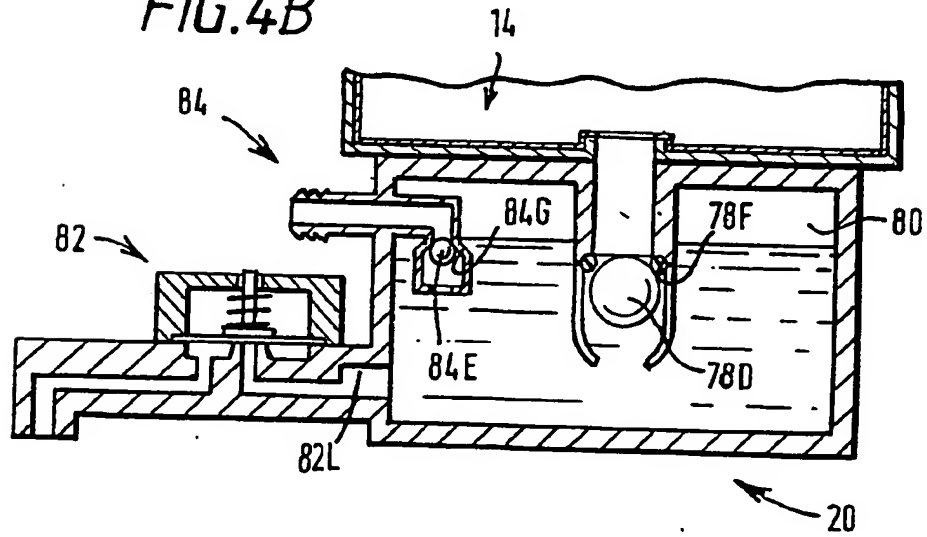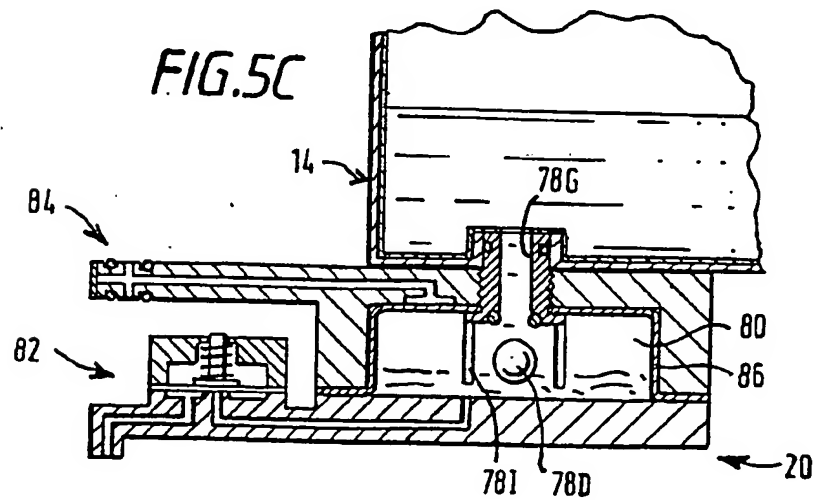

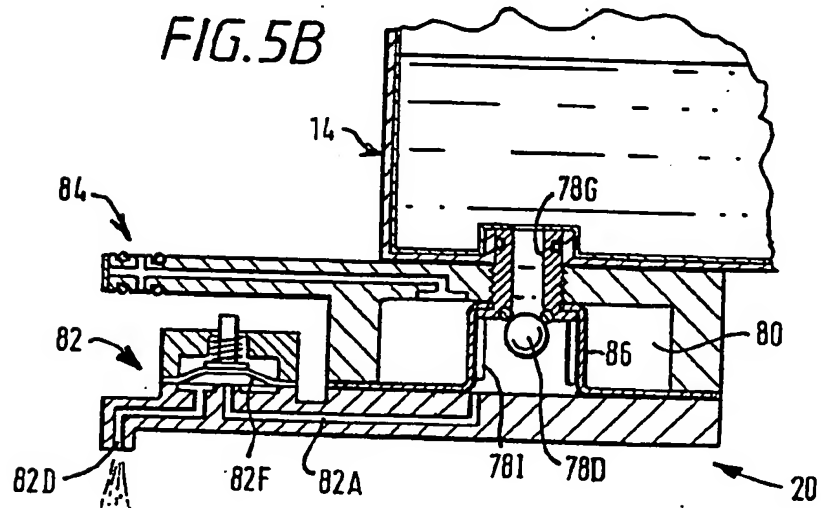

5/24

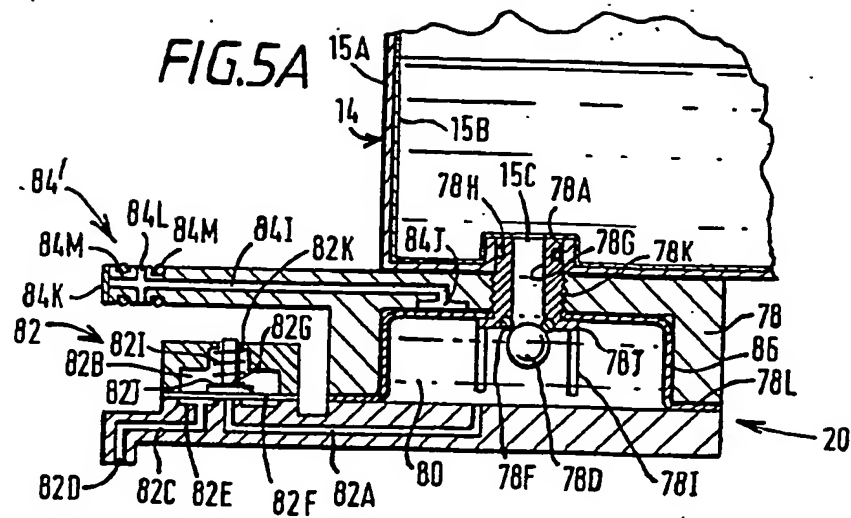







q/24.

FIG. 9A


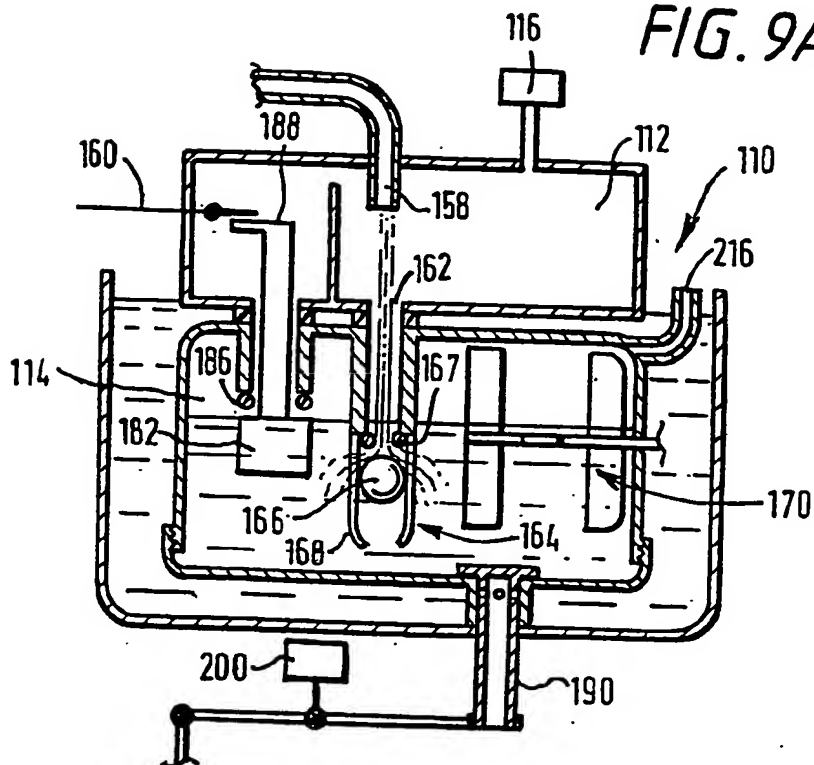


FIG. 9B

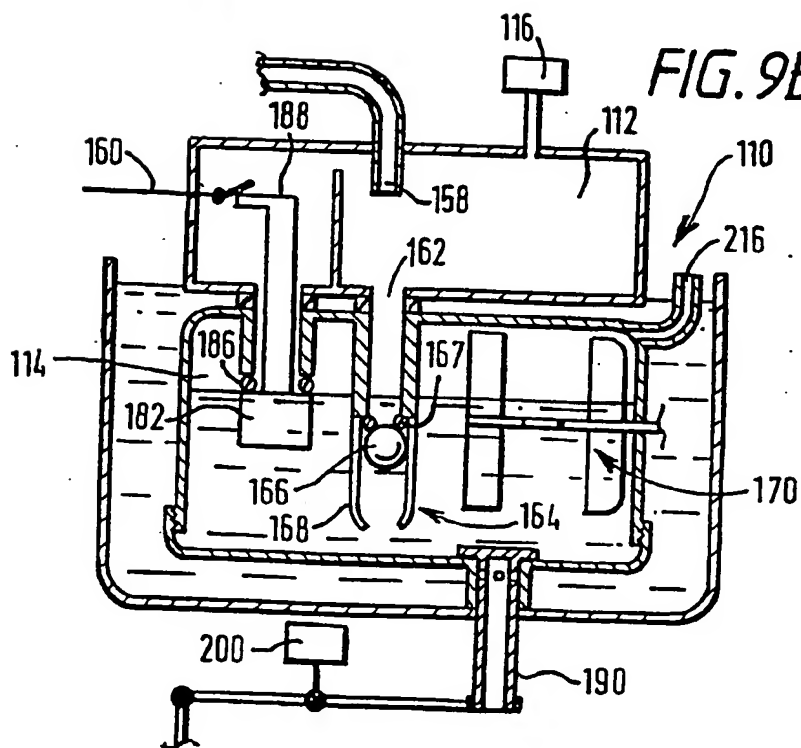

10/24

FIG. 10



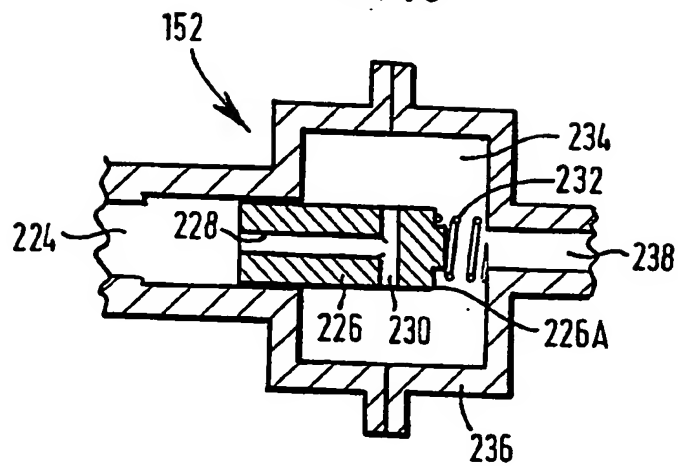




FIG. 11

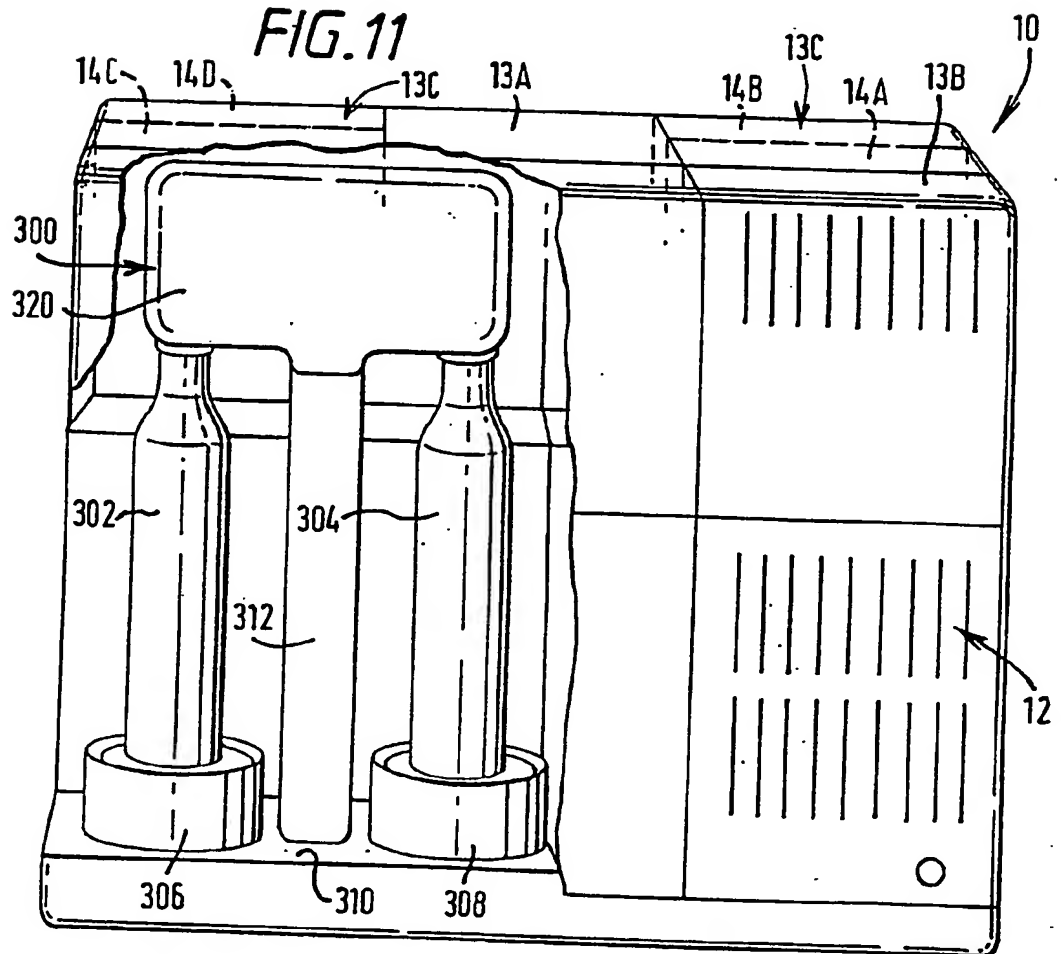

111.2.4

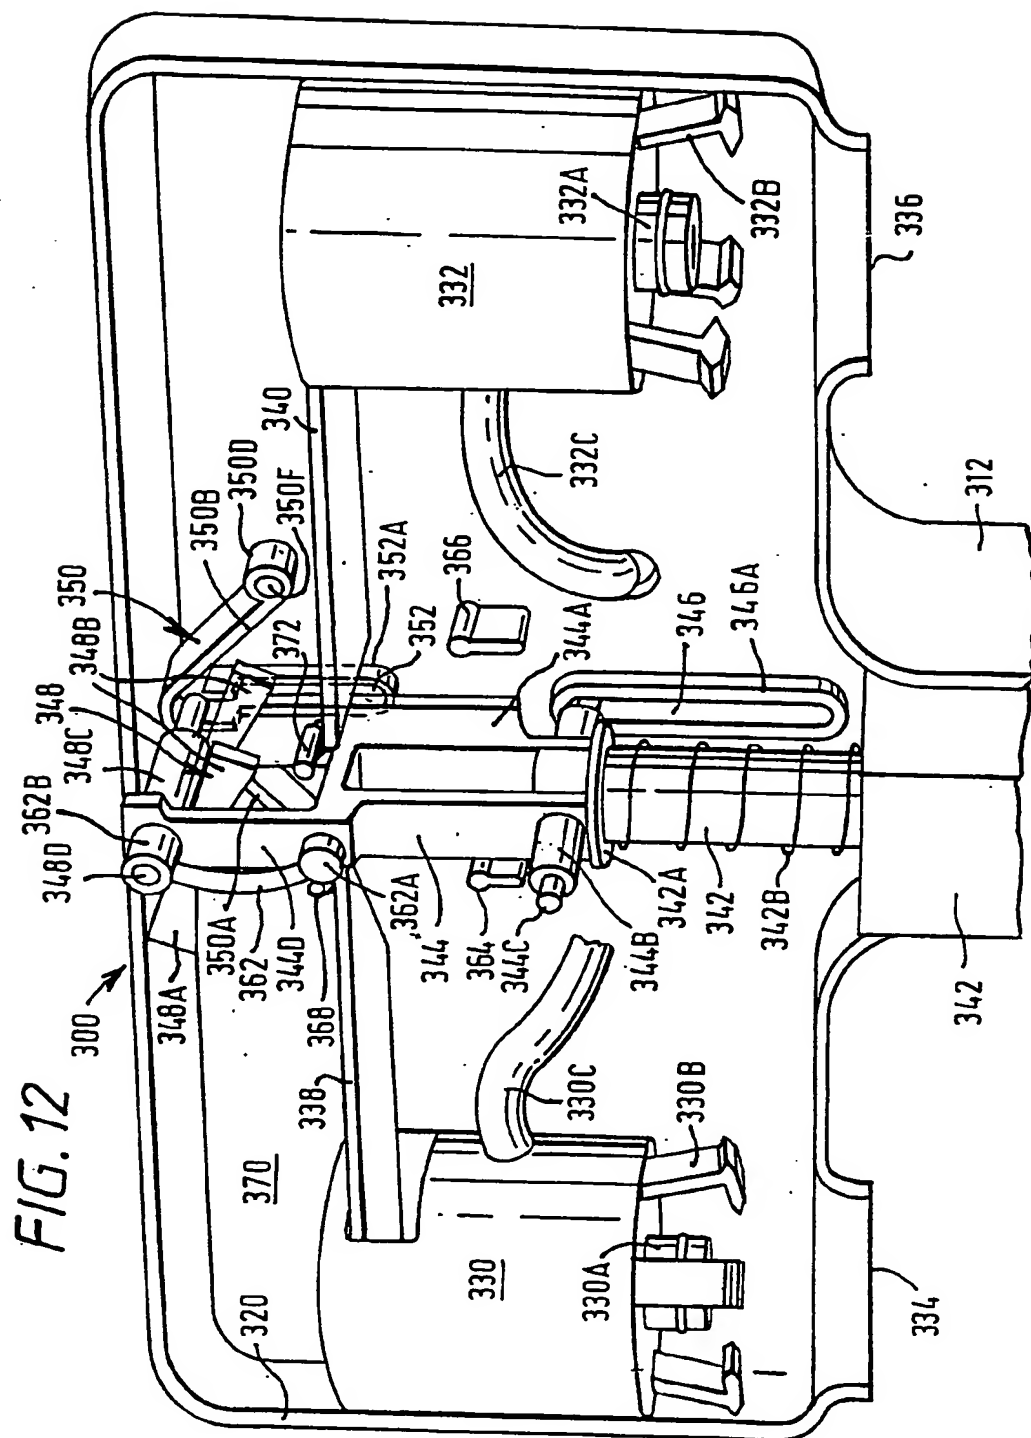

12/24

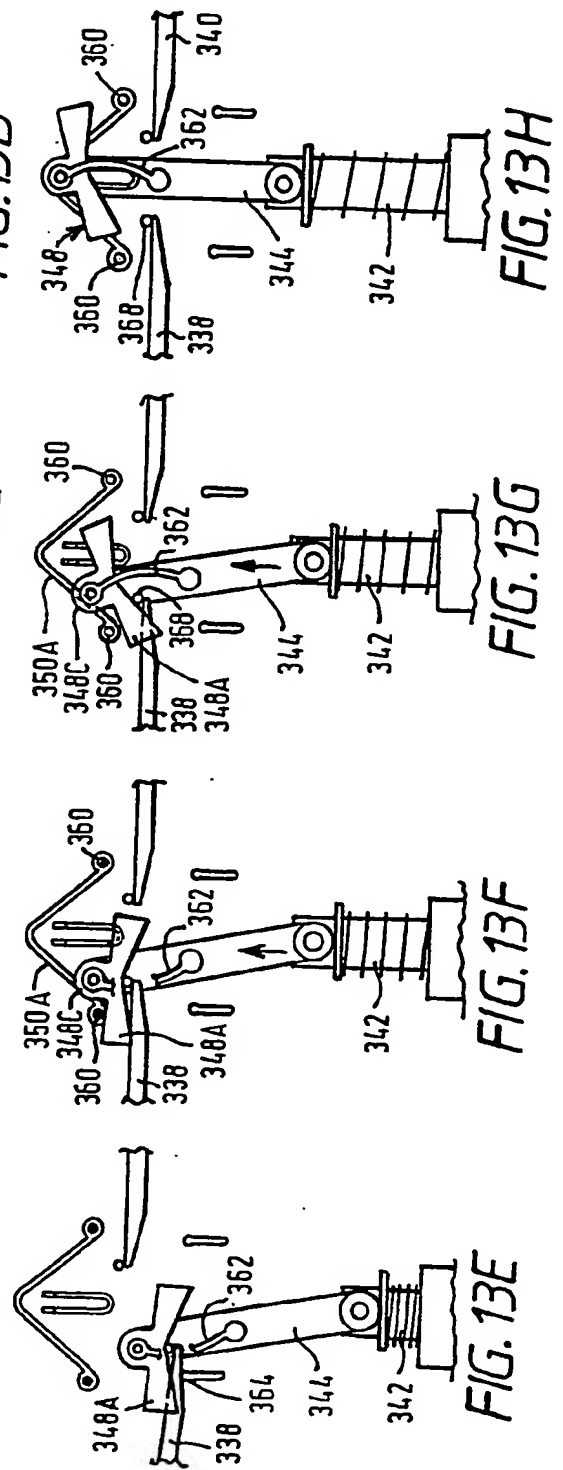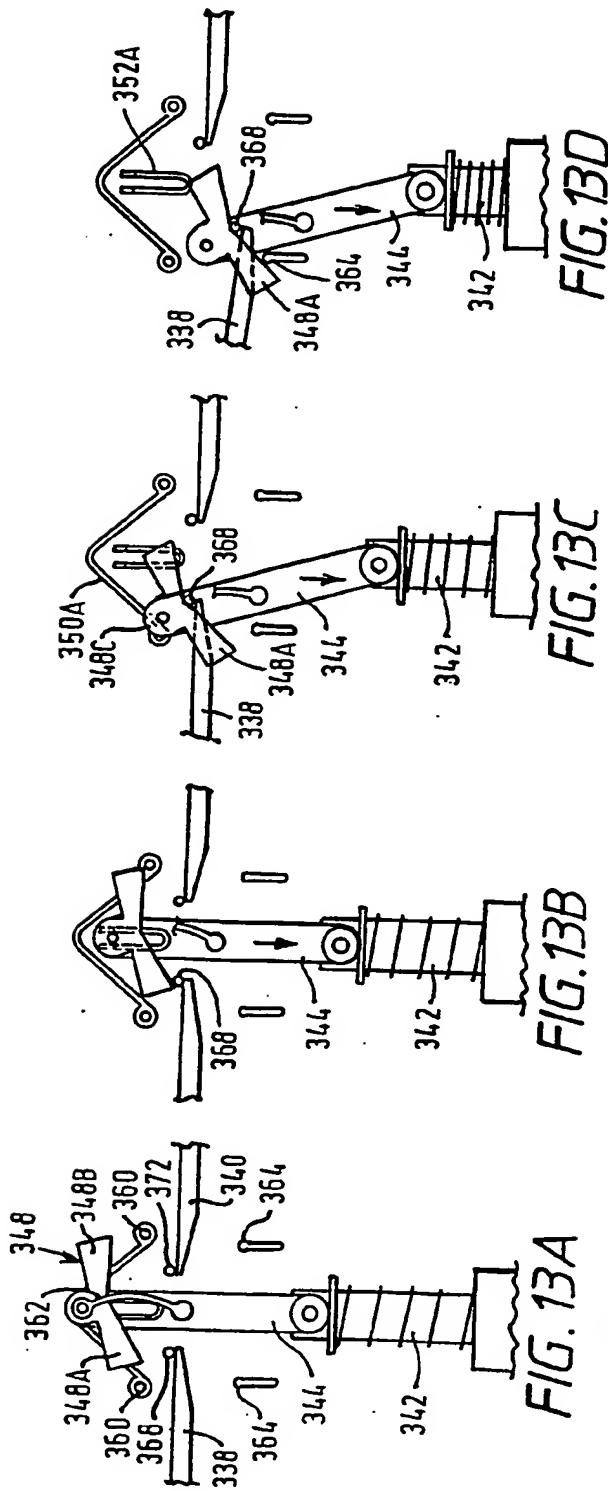



13/24

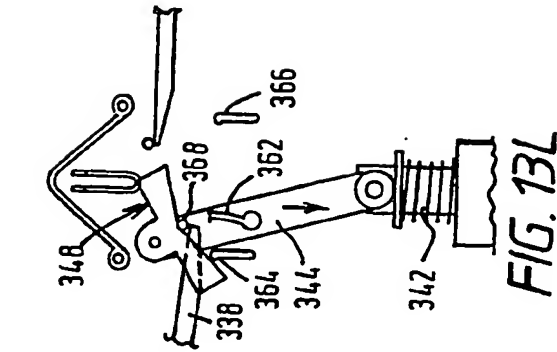


FIG. 13L

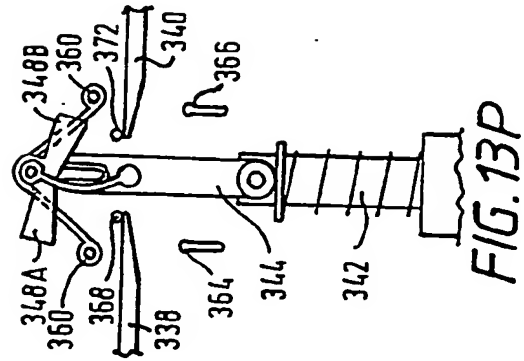


FIG. 13P

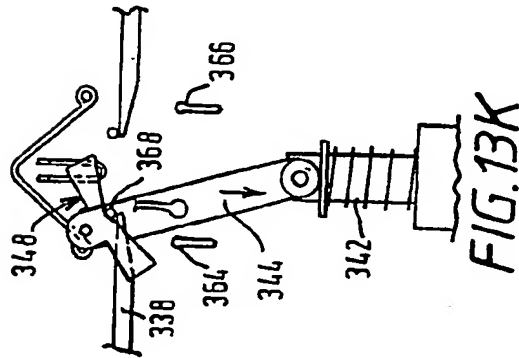


FIG. 13K

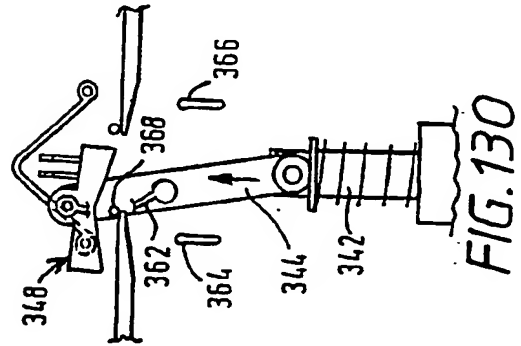


FIG. 13O

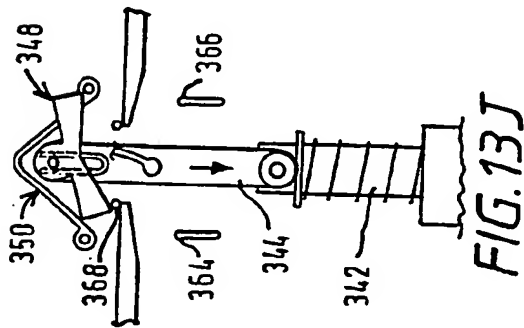


FIG. 13J

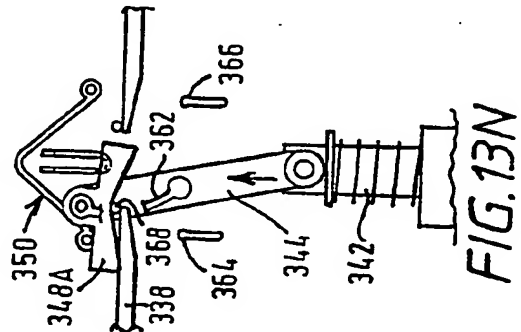


FIG. 13N

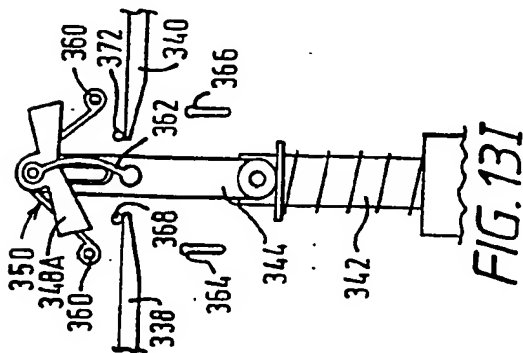


FIG. 13I








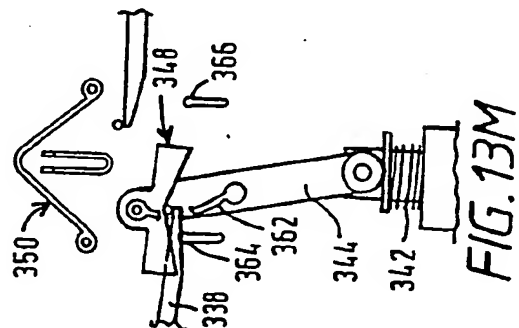


FIG. 13M

14/24

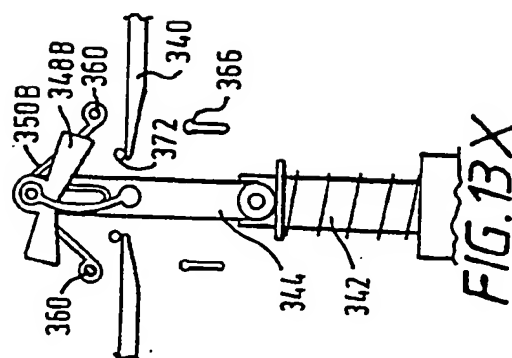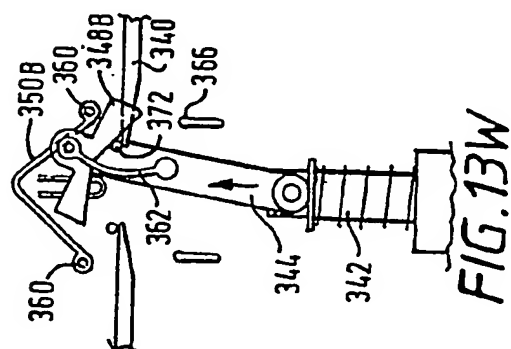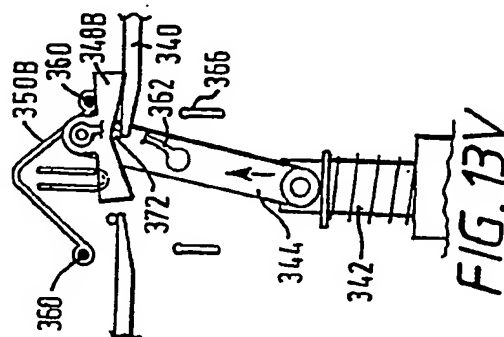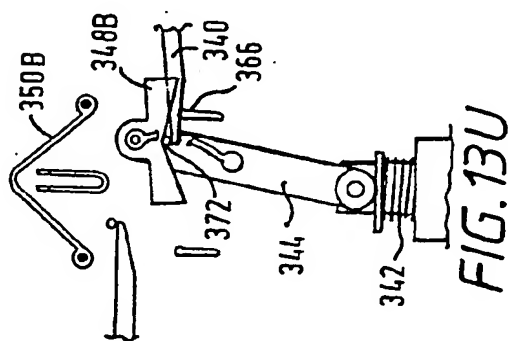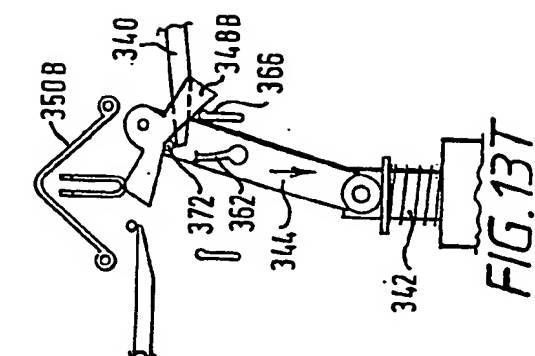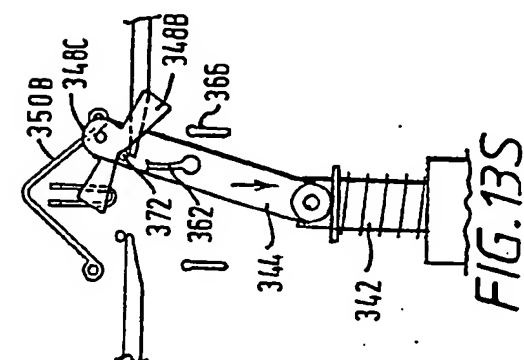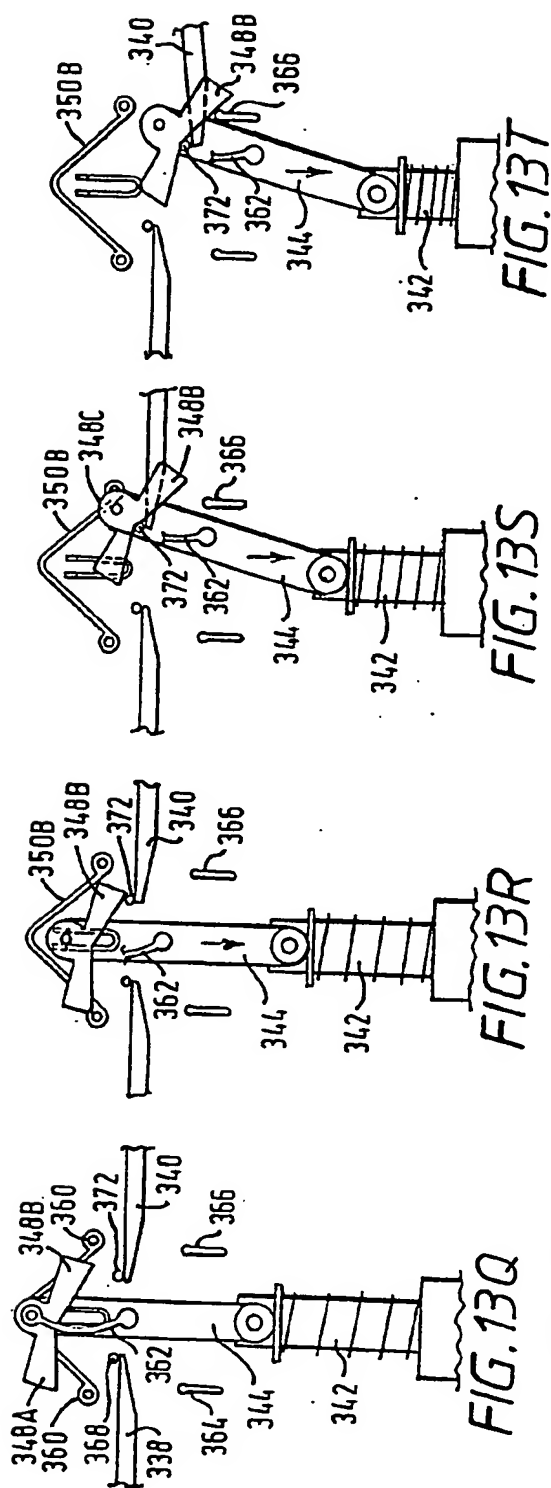

15/24

FIG. 14A

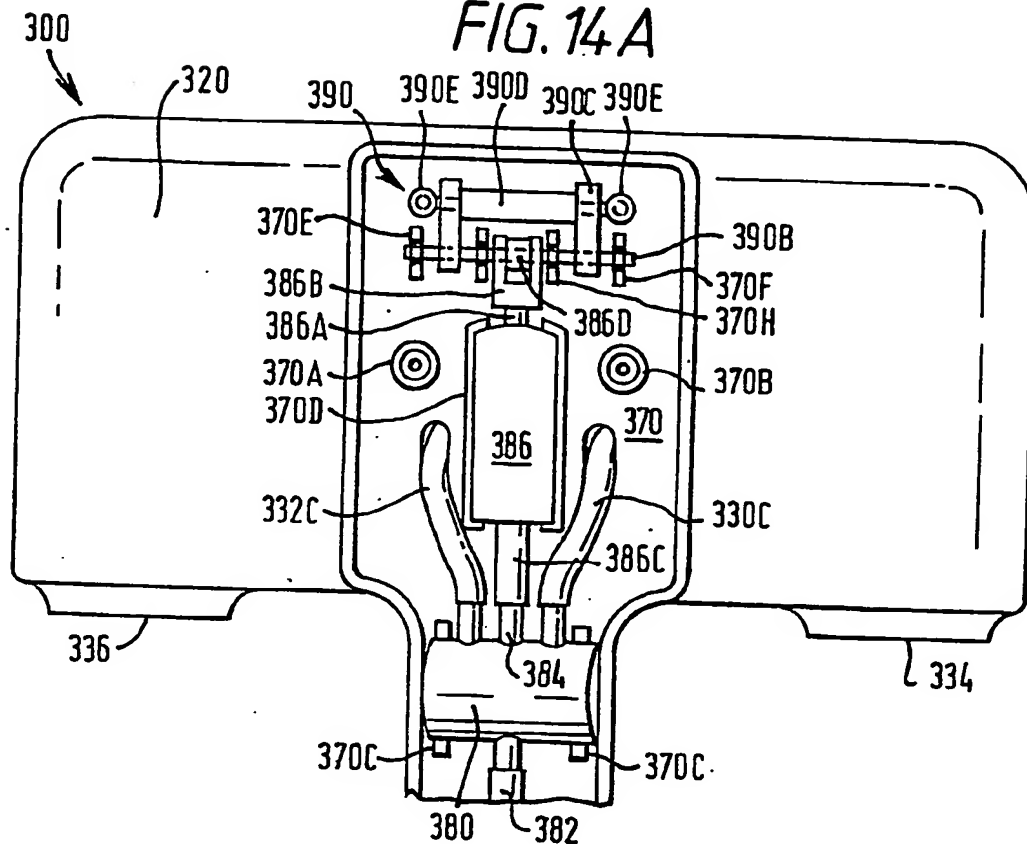


FIG. 14B



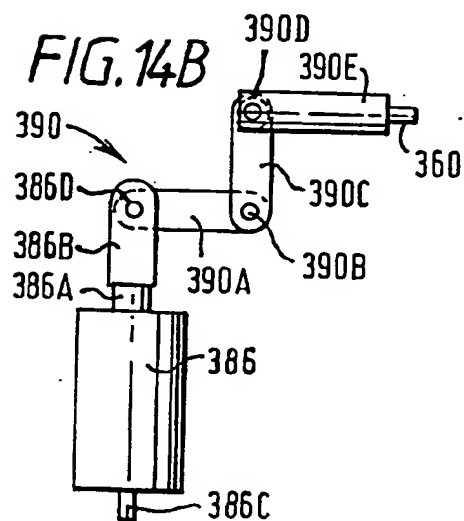


FIG. 14C

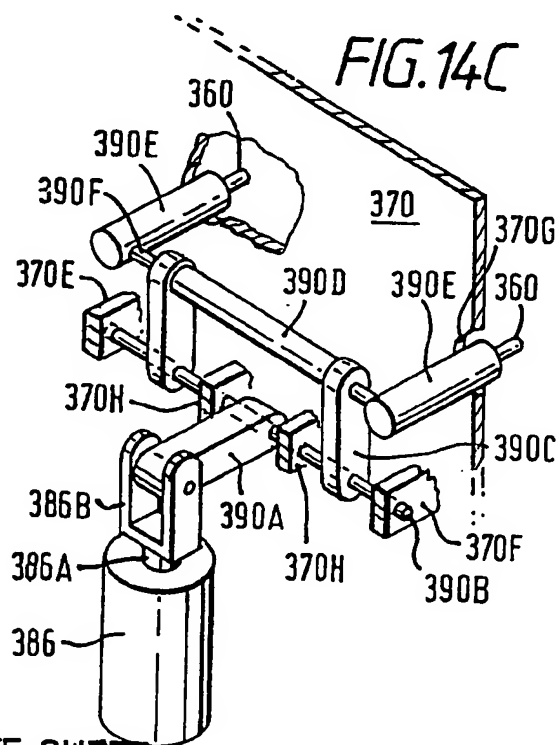

SUBSTITUTE SHEET


16/24

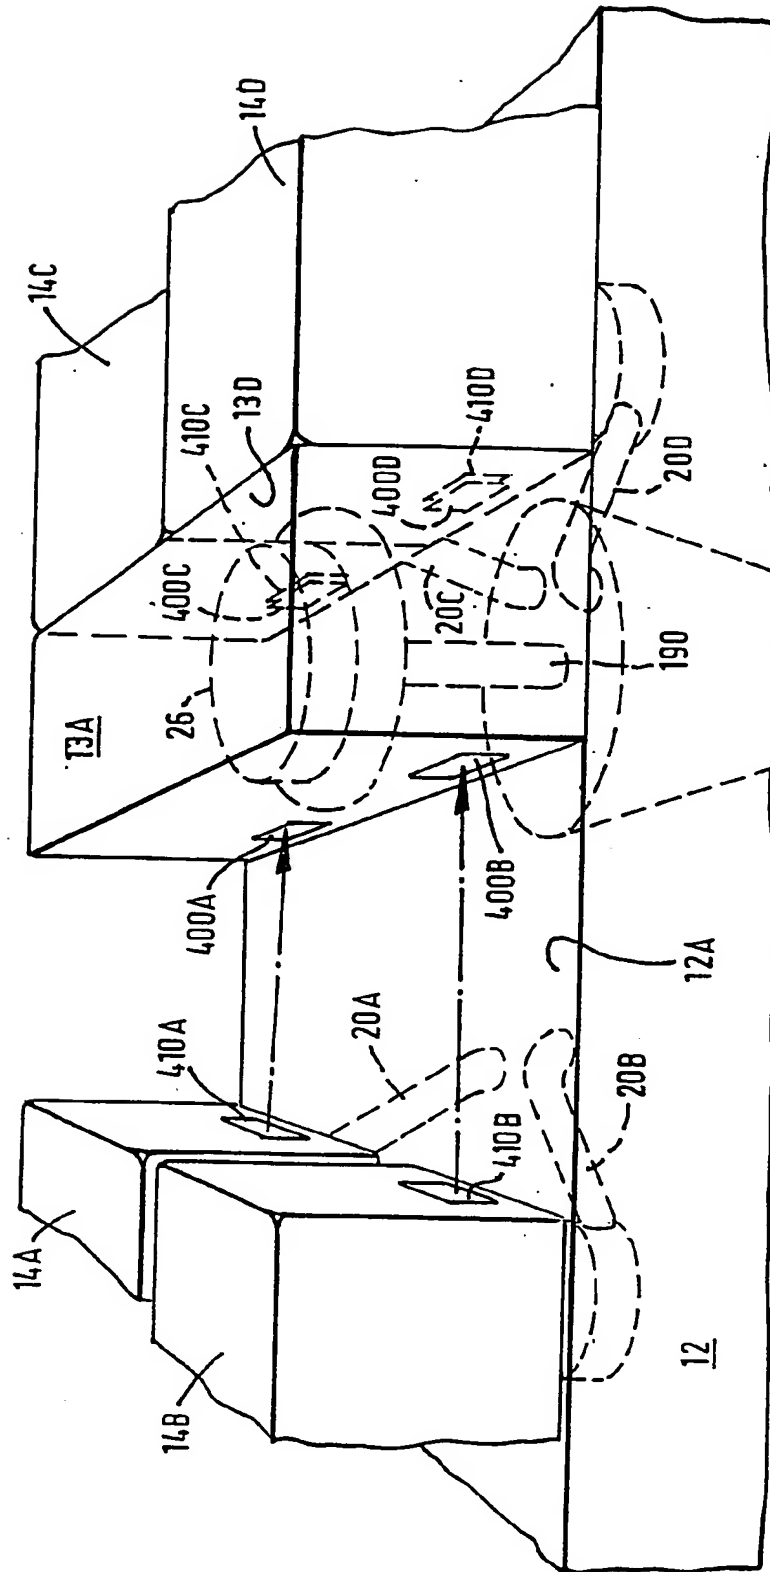

SUBSTITUTE SHEET


17/24

FIG. 16

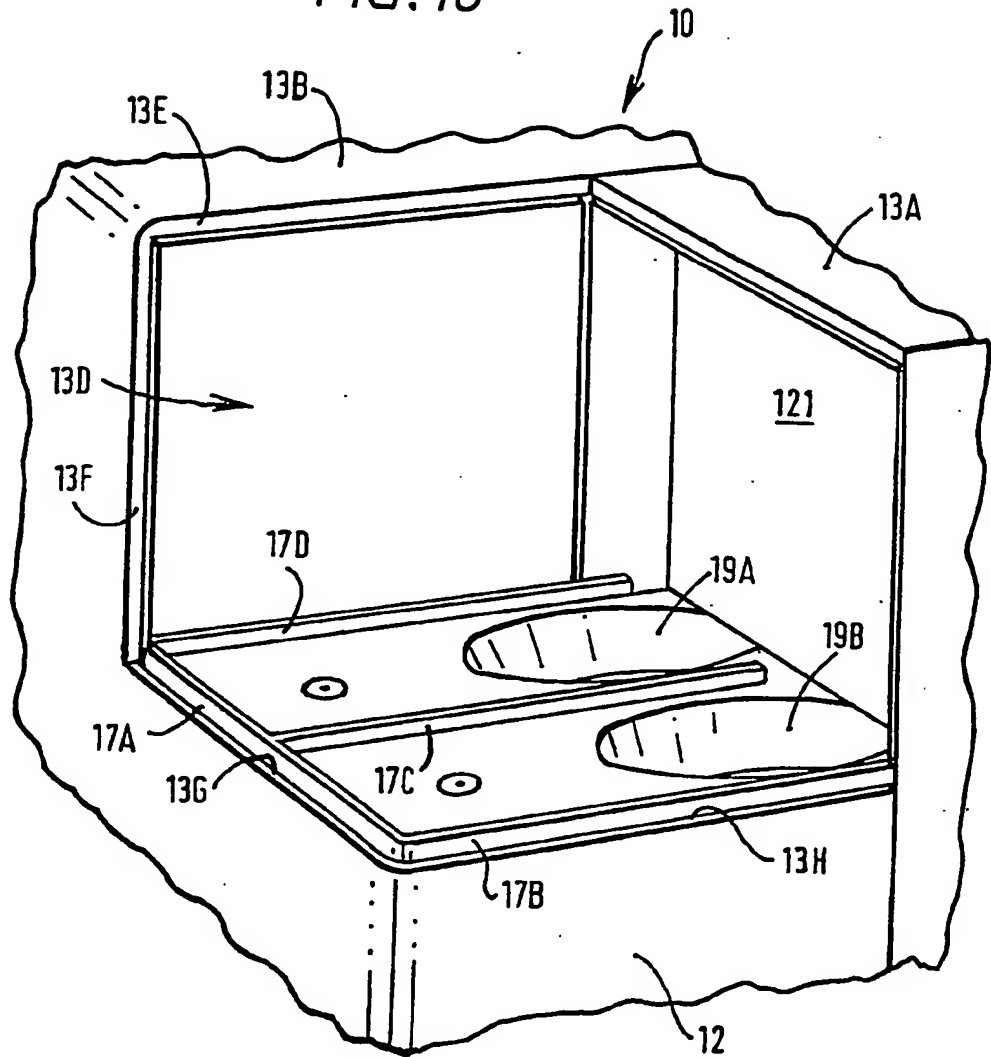

18/24

FIG. 17

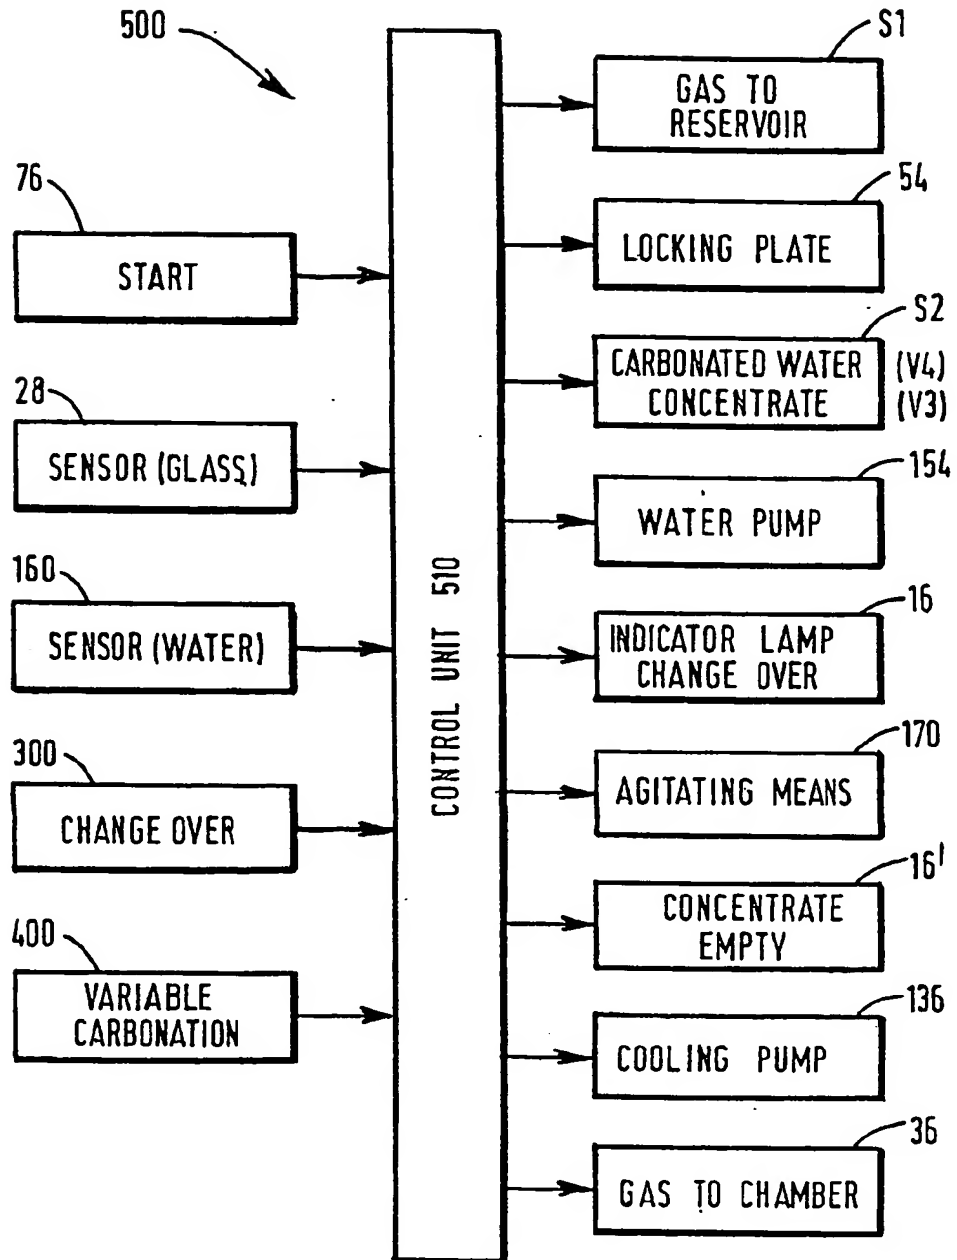

19/24

FIG.19

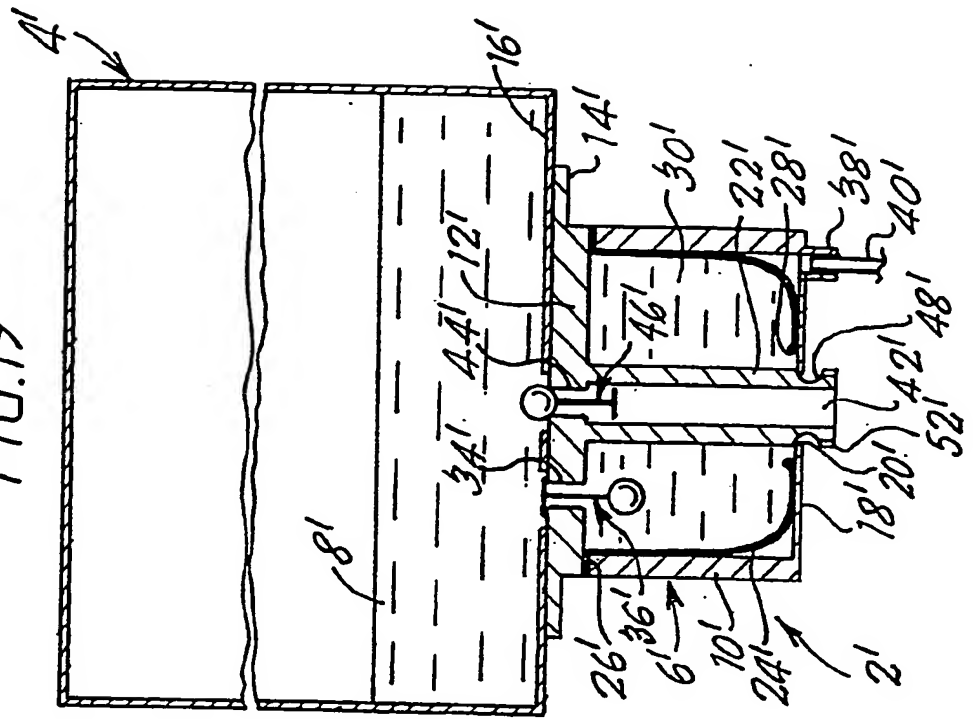


FIG.18

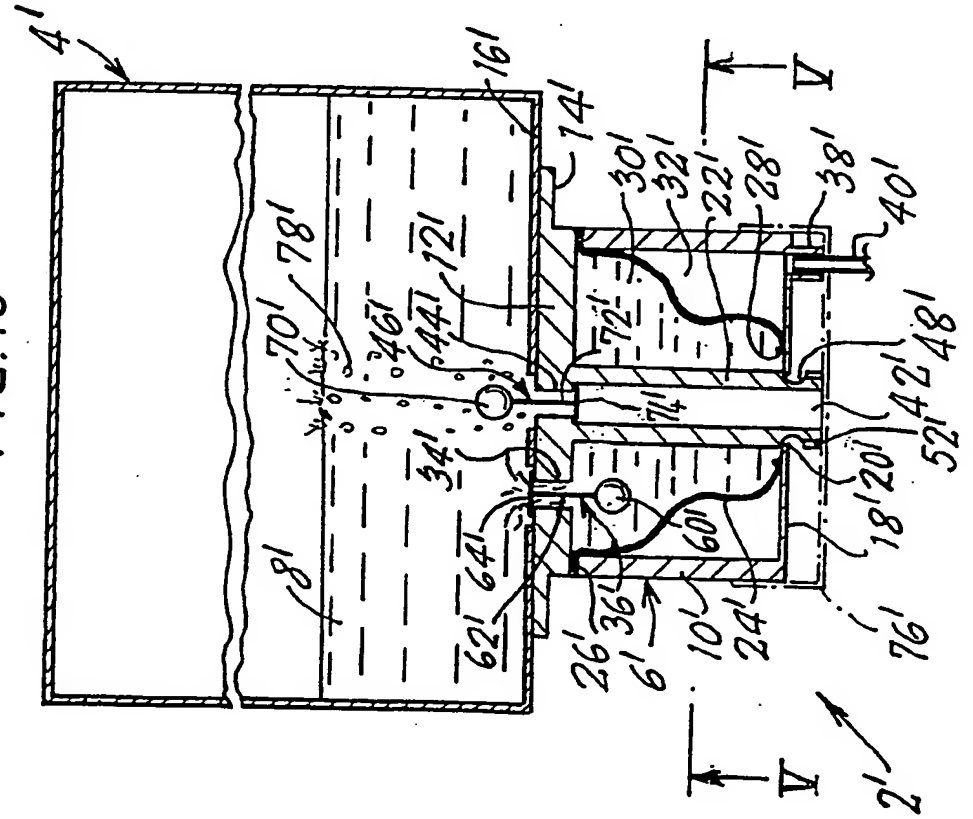


FIG. 20


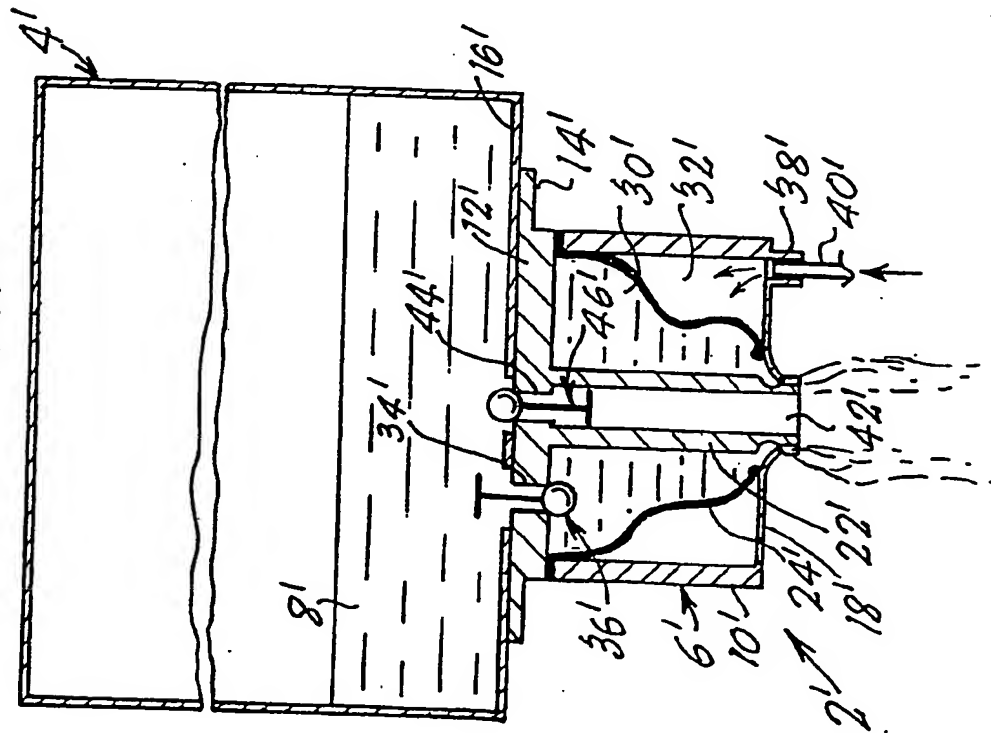


FIG. 21



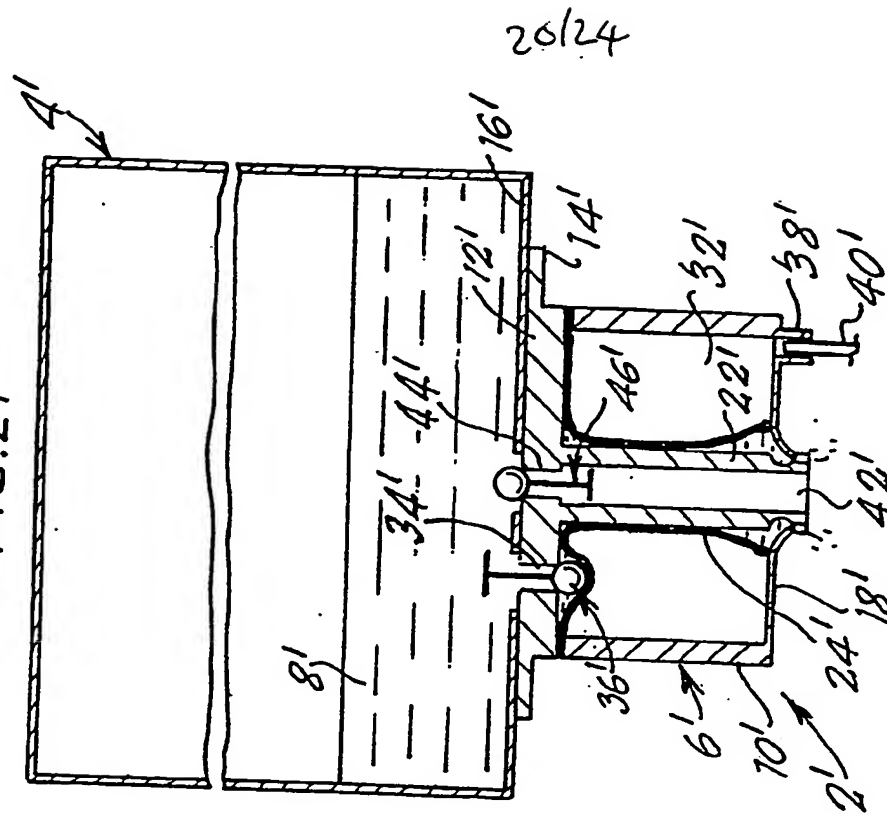

21/24

FIG. 22


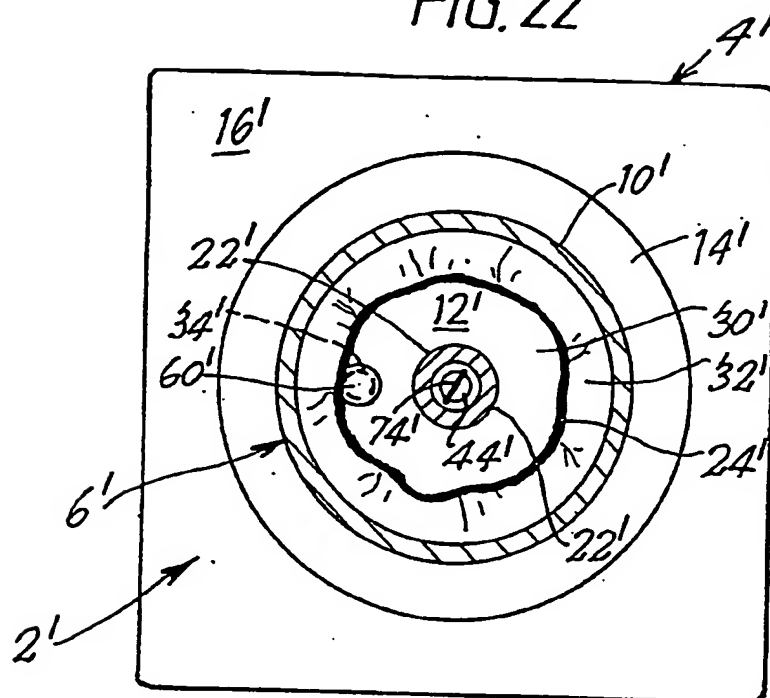


FIG. 23

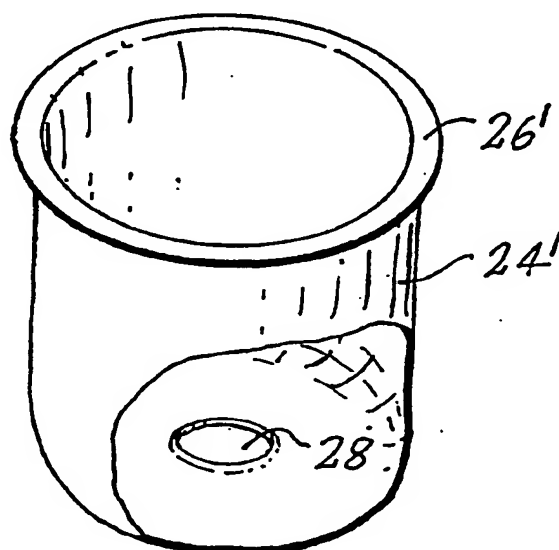

22/24

FIG. 24


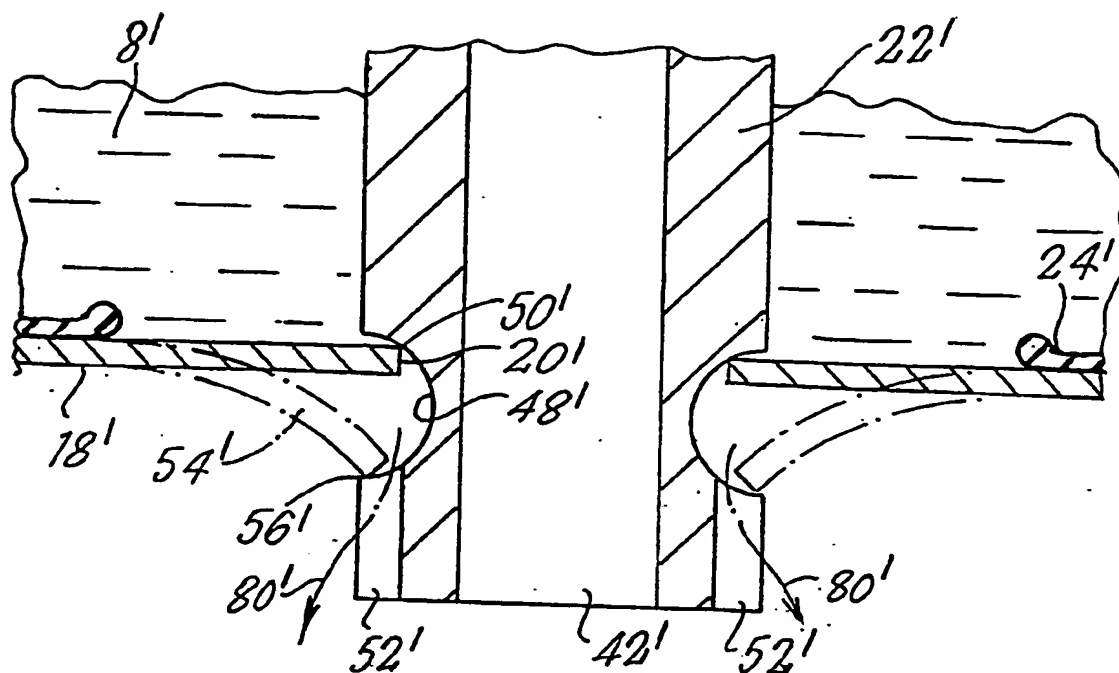


FIG. 25

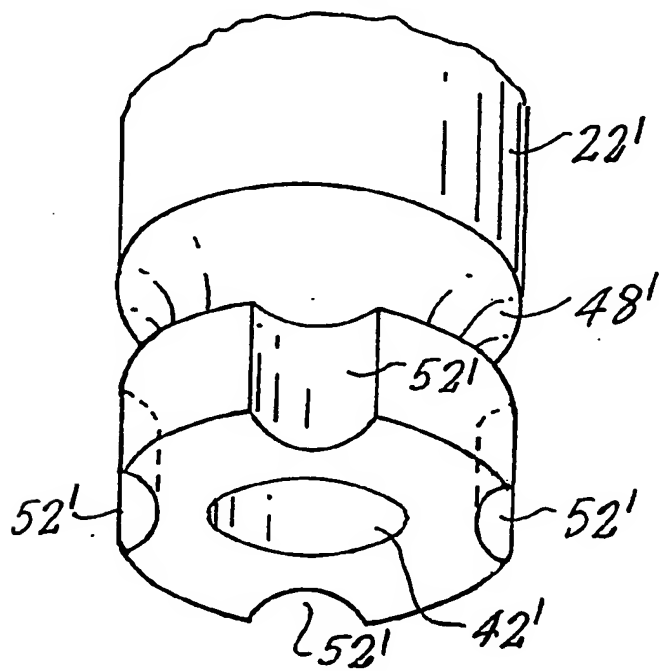

23/24

FIG. 27


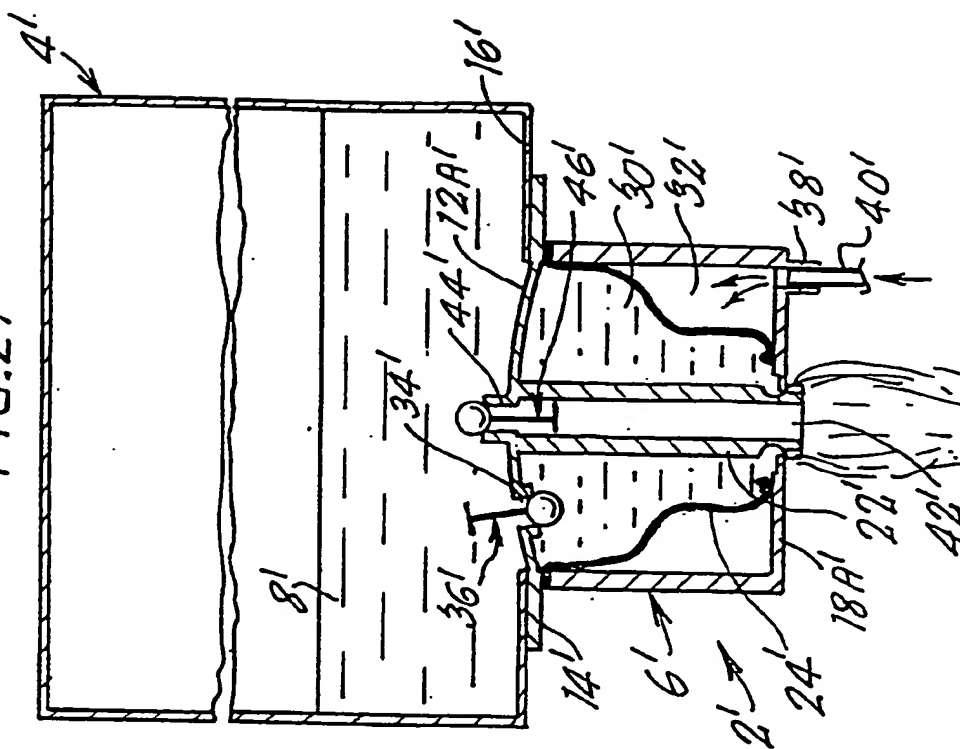


FIG. 26



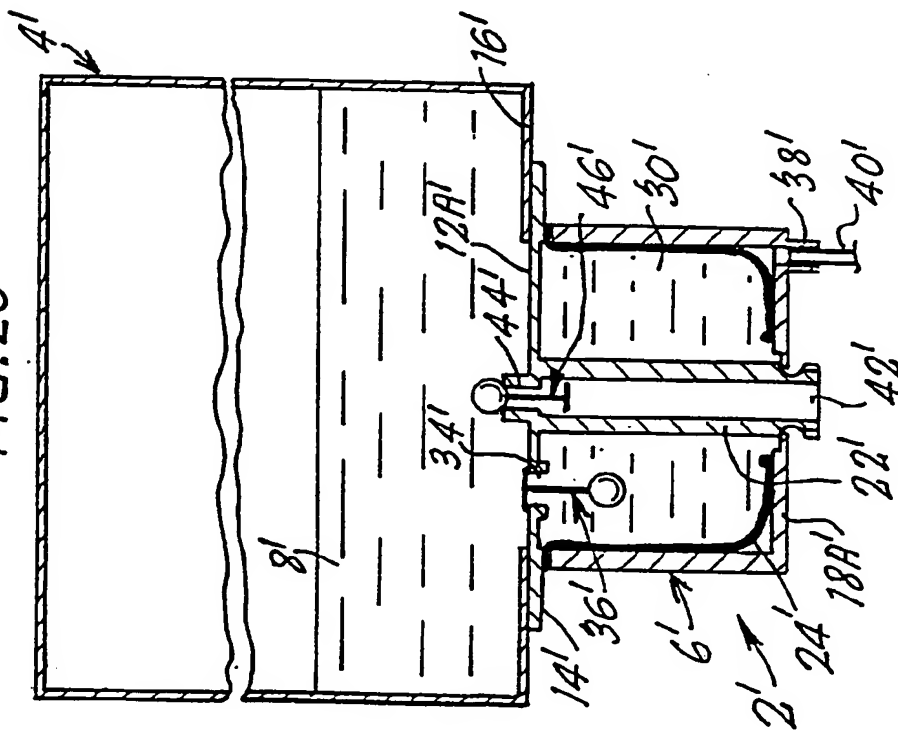

# INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 90/00946

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC IPC <sup>5</sup> : B 67 D 1/00											
<b>II. FIELDS SEARCHED</b> <div style="text-align: right; font-size: small;">Minimum Documentation Searched *</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 30%; border-bottom: 1px solid black; font-size: small;">Classification System</th> <th style="border-bottom: 1px solid black; font-size: small;">Classification Symbols</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 5px;">IPC<sup>5</sup></td> <td style="padding: 5px;">B 67 D</td> </tr> </table> <div style="text-align: center; font-size: small; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *</div>			Classification System	Classification Symbols	IPC <sup>5</sup>	B 67 D					
Classification System	Classification Symbols										
IPC <sup>5</sup>	B 67 D										
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT *</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; font-size: small;">Category *</th> <th style="width: 60%; font-size: small;">Citation of Document, ** with indication, where appropriate, of the relevant passages <sup>12</sup></th> <th style="width: 30%; font-size: small;">Relevant to Claim No. <sup>12</sup></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">CH, A, 274188 (COCA-COLA COMPANY) 16 July 1951 see page 2, lines 9-61, page 4, lines 8-12; figures 1,2</td> <td style="text-align: center; vertical-align: top; padding: 5px;">78</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">-----</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,79,80</td> </tr> </tbody> </table>			Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>12</sup>	X	CH, A, 274188 (COCA-COLA COMPANY) 16 July 1951 see page 2, lines 9-61, page 4, lines 8-12; figures 1,2	78	A	-----	1,79,80
Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>12</sup>									
X	CH, A, 274188 (COCA-COLA COMPANY) 16 July 1951 see page 2, lines 9-61, page 4, lines 8-12; figures 1,2	78									
A	-----	1,79,80									
<div style="font-size: x-small;">           * Special categories of cited documents: <sup>10</sup>            "A" document defining the general state of the art which is not considered to be of particular relevance            "E" earlier document but published on or after the international filing date            "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)            "O" document referring to an oral disclosure, use, exhibition or other means            "P" document published prior to the international filing date but later than the priority date claimed            "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention            "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step            "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.            "Z" document member of the same patent family         </div>											
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">Date of the Actual Completion of the International Search</td> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="border-bottom: 1px solid black; padding: 5px; text-align: center;">24th August 1990</td> <td style="border-bottom: 1px solid black; padding: 5px; text-align: center;">28. 11. 90</td> </tr> <tr> <td style="border-bottom: 1px solid black; padding: 5px;">International Searching Authority</td> <td style="border-bottom: 1px solid black; padding: 5px;">Signature of Authorized Officer</td> </tr> <tr> <td style="padding: 5px; text-align: center;">EUROPEAN PATENT OFFICE</td> <td style="padding: 5px;">F.W. HECK <span style="float: right; font-family: cursive; font-size: 1.2em;">Heck</span></td> </tr> </table>			Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	24th August 1990	28. 11. 90	International Searching Authority	Signature of Authorized Officer	EUROPEAN PATENT OFFICE	F.W. HECK <span style="float: right; font-family: cursive; font-size: 1.2em;">Heck</span>	
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report										
24th August 1990	28. 11. 90										
International Searching Authority	Signature of Authorized Officer										
EUROPEAN PATENT OFFICE	F.W. HECK <span style="float: right; font-family: cursive; font-size: 1.2em;">Heck</span>										

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

V. ☒ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE <sup>1</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☒ Claim numbers 11, because they relate to subject matter not required to be searched by this Authority, namely:  
see PCT Article 6 and PCT Rule 6.2.a

2. ☐ Claim numbers \_\_\_\_\_, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim numbers \_\_\_\_\_, because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☒ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING <sup>2</sup>

This International Searching Authority found multiple inventions in this international application as follows:

1. claims 1-42, 78-80; 2. claims 43-60, 81; 3. claims 61-70, 84;  
4. claims 71-75, 82; 5. claims 76, 77, 83; 6. claims 85, 86;  
7. claim 87; 8. claim 88; 9. claim 89

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

1. claims 1-42, 78-80

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

## Remark on Protest

☐ The additional search fees were accompanied by applicant's protest.

☐ No protest accompanied the payment of additional search fees.

ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.

GB 9000946

SA 37667

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on 13/11/90  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CH-A- 274188		None	

EPO FORM P0479

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82